
PROJECT NO. 8475-N115

FED. SUP CLASS
8475

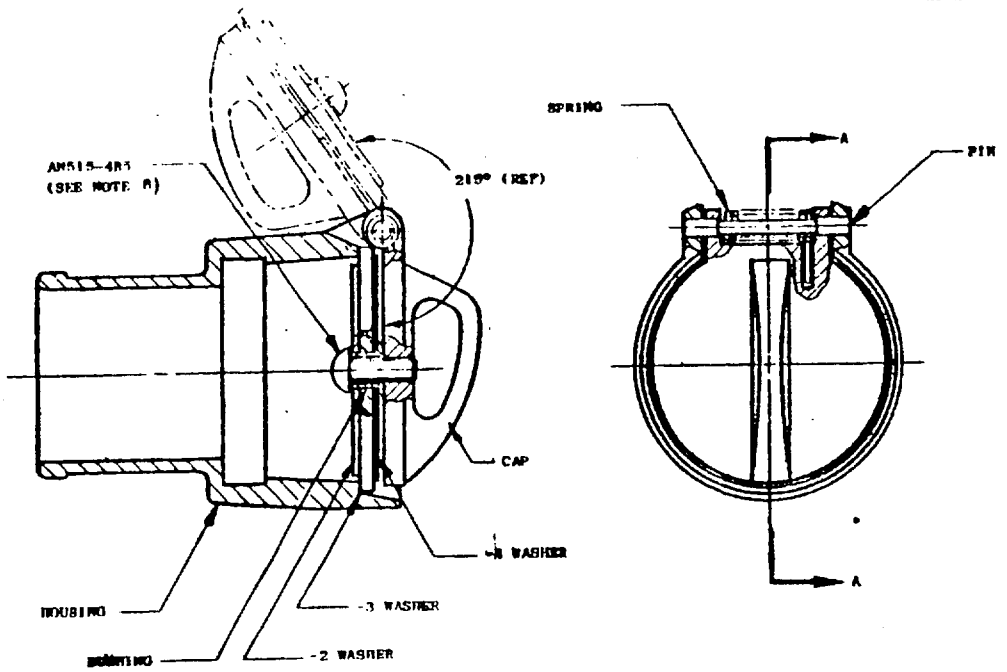

SECTION A-A

DASH NO.
-1

NOTES:
1. MATERIAL: CAP AND HOUSING, ALUMINUM ALLOY CASTING, CONDITION T6, CLASS 8, IN ACCORDANCE WITH QQ-A-596,
ALTERNATE MATERIAL: ALUMINUM ALLOY 2024, TEMPER T4 IN ACCORDANCE WITH QQ-A-225/6.
WASHERS -2 AND -4, ALUMINUM ALLOY, 2024, TEMPER T4, IN ACCORDANCE WITH QQ-A-250/4.
WASHER -3, RUBBER, CLASS II, GRADE 60, IN ACCORDANCE WITH MIL-R-6855.
BUSHING, ALUMINUM ALLOY, 2024, TEMPER T4, IN ACCORDANCE WITH QQ-A-225/6
PIN, STEEL, COMPOSITION 1035, IN ACCORDANCE WITH QQ-S-634.
SPRING, STEEL WIRE IN ACCORDANCE WITH QQ-W-470.
2. FINISH: WASHERS -2 AND -4, AND BUSHING, ANODIZE, TYPE II, IN ACCORDANCE WITH MIL-A-8625.
CAP AND HOUSING, ANODIZE, TYPE II, IN ACCORDANCE WITH MIL-A-8625. DYED RED.
PIN AND SPRING, CADMIUM PLATE, TYPE I, CLASS I, IN ACCORDANCE WITH QQ-P-416.
3. 125/ ALL OVER, EXCEPT AS NOTED. SURFACE CONDITION FINISH DESIGNATION SHALL BE INTERPRETED IN ACCORDANCE WITH MIL-STD-10.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.
6. STAKE TWO PLACES. APPLY THIN COATING OF PERMATEX NO. 1 COMPOUND TO SCREW THREADS AT ASSEMBLY.
7. USAGE: INTENDED TO BE USED TO CONNECT THE SUIT VENTILATION HOSE WITH THE FLOW CONTROL AND QUICK DISCONNECT MALE CONNECTOR ASSEMBLY (MS90350) TO SUPPLY VENTILATION AIR FOR THE MC5A ANTI-EXPOSURE SUIT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 2 DEC 1953 REVISED (A) 27 APR 1965 (B) 30 JUNE 1966 (C) 2 Mar 1976


(C) REVISED

P.A. NAVY-AS Other Cost	TITLE COUPLING ASSEMBLY, VENTILATION AIR	MILITARY STANDARD MS17965(AS)
PROCUREMENT SPECIFICATION	SUPERSEDES: AS17965	SHEET 1 OF 3


Is approved by NAVAL AIR SYSTEMS COMMAND, DEPARTMENT OF THE NAVY and is to be used by all military activities where applicable. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
8475

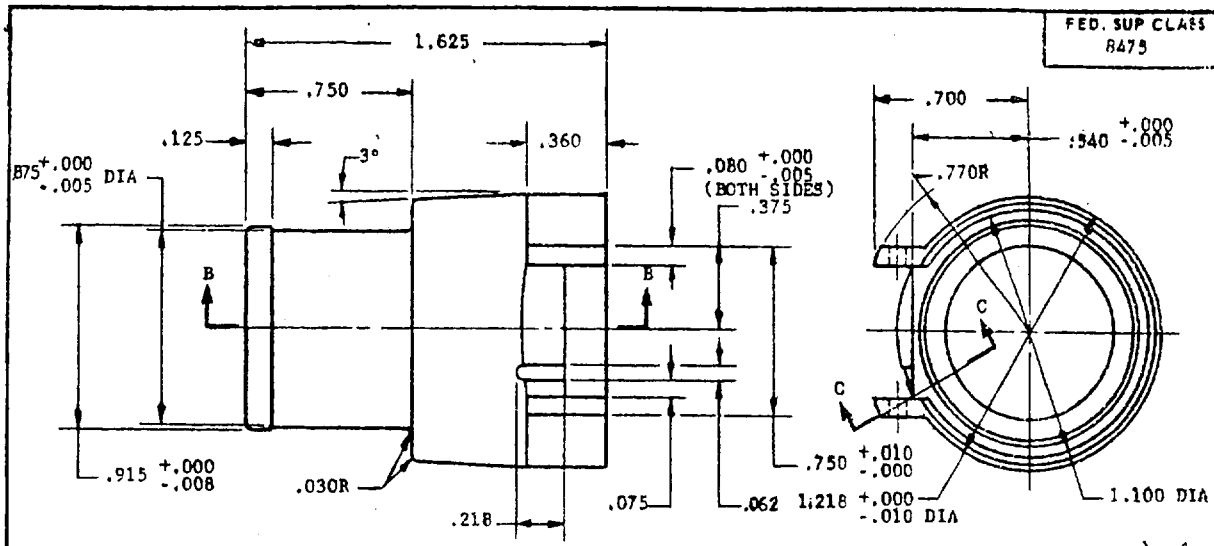


HOUSING

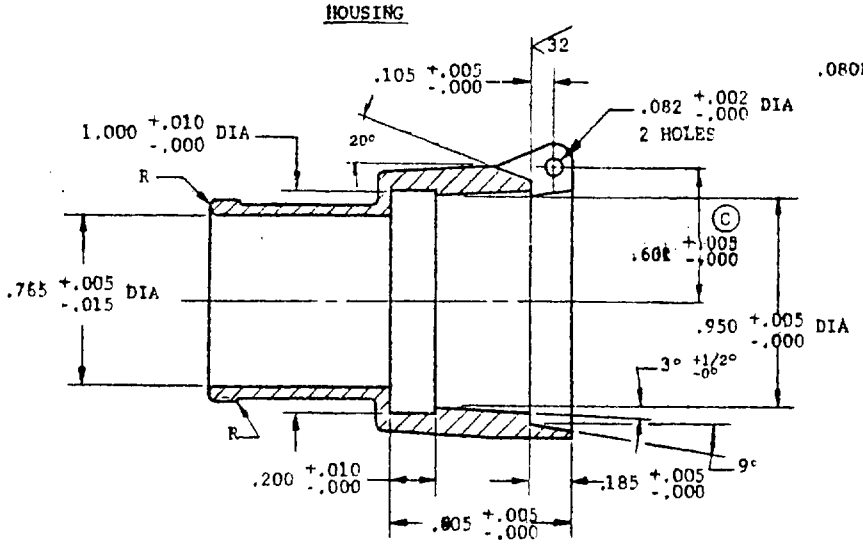

SECTION B-B

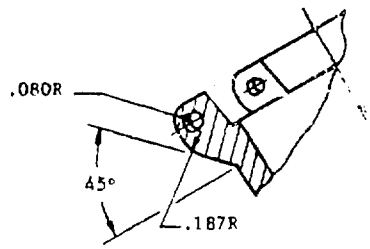

SECTION C-C

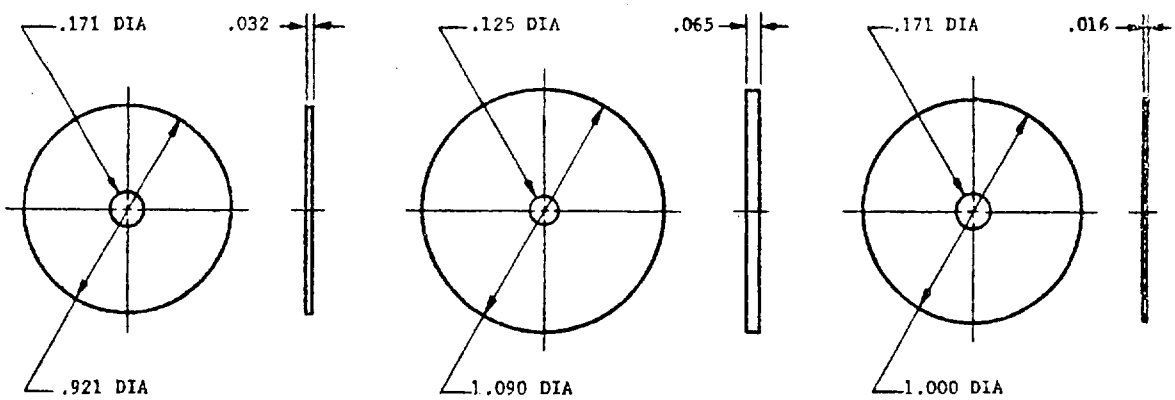

-2 WASHER

-3 WASHER

-4 WASHER


APPROVED 2 DEC 63 REVISED (A) FOR CHANGES SEE SHEET 1, 2, 3 (B) FOR CHANGES SEE SHEETS 1 THRU 3 (C)

The military services or agencies of the Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.


P.A. Navy- AS Other Cust	TITLE COUPLING ASSEMBLY, VENTILATION AIR	MILITARY STANDARD MS17965(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: ACEL DRAWING 33B1245	SHEET 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
8476

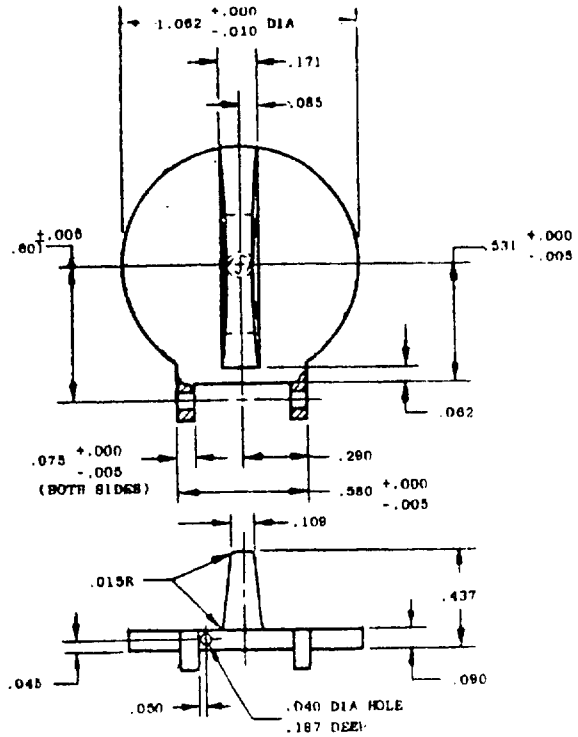


CAP

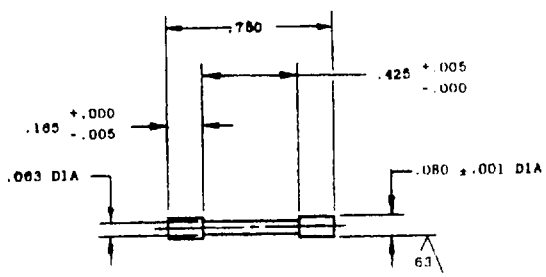


PIN

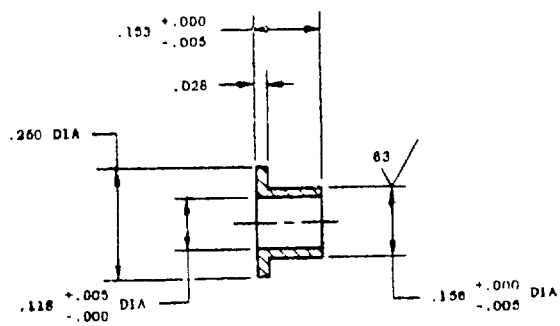


BUSHING

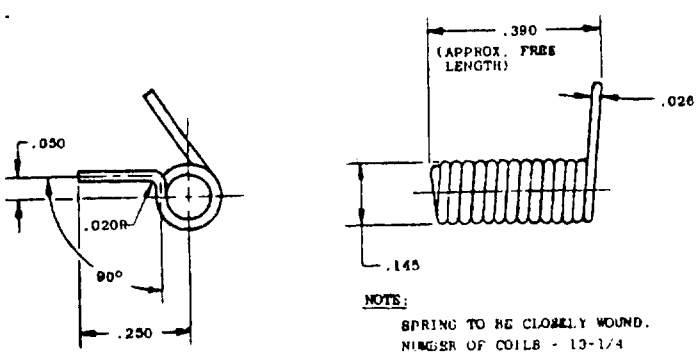



NOTE:
SPRING TO BE CLOSELY WOUND.
NUMBER OF COILS - 13-1/4
SPRING MUST NOT TAKE SET WHEN DEFLECTED CLOCKWISE 360°.
HEAT SPRING 500° TO 550° FOR 8 MIN. AFTER FORMING.

SPRING

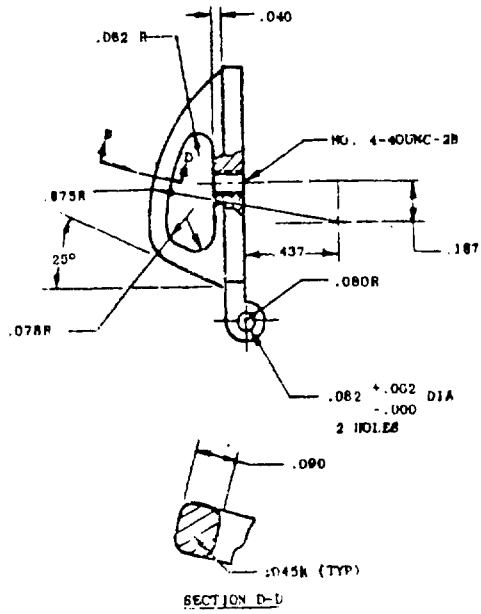

APPROVED 2 Dec 1963 REVISED (A) FOR CHANGES SEE SHEET 1, 2, 3 (B) FOR CHANGES SEE SHEET 3 (C) FOR CHANGES SEE SHEETS 1 THRU 3

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. ⊥ NAVY-AS Other Cust	TITLE COUPLING ASSEMBLY, VENTILATION AIR	MILITARY STANDARD MS17965(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: ACEL DWG 33B1248	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.