
FED SUP CLASS
5935

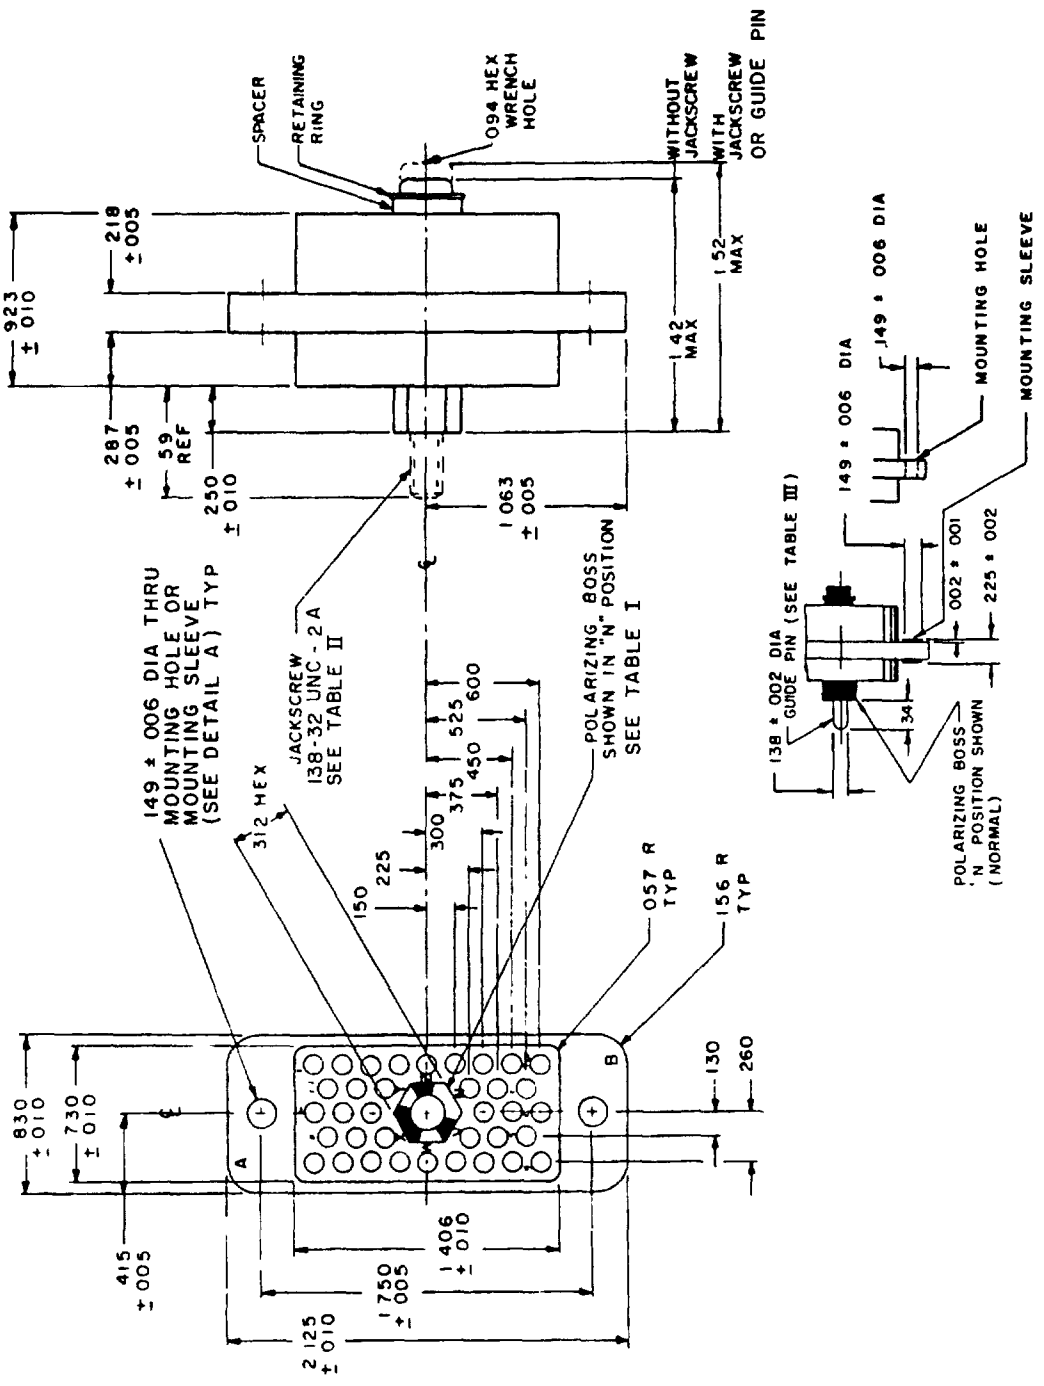

Design standard for use with MIL-C-28748/10

© Entire standard revised

P A Navy - EC Other Cus AF - 85 Army - EL	International criteria	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 36 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18160
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-10

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

APPROVED 20 Dec 1965 REVISED (A) 29 Jul 1968 (B) 20 May 1970 (C) 8 July 1976

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

TYPE
SEE TABLE I




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18160-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18160-1V	V (TYPE 1)	
MS 18160-1W	W (TYPE 1)	
MS 18160-1X	X (TYPE 2)	
MS 18160-1Y	Y (TYPE 2)	
MS 18160-1Z	Z (TYPE 2)	
MS 18160-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 138-32 UNC-2B
MS 18160-2V	V (TYPE 1)	
MS 18160-2W	W (TYPE 1)	
MS 18160-2X	X (TYPE 2)	
MS 18160-2Y	Y (TYPE 2)	
MS 18160-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18160-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18160-3V	V (TYPE 1)	
MS 18160-3W	W (TYPE 1)	
MS 18160-3X	X (TYPE 2)	
MS 18160-3Y	Y (TYPE 2)	
MS 18160-3Z	Z (TYPE 2)	
MS 18160-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ± .002 I.D. TO ACCEPT GUIDE PIN
MS 18160-4V	V (TYPE 1)	
MS 18160-4W	W (TYPE 1)	
MS 18160-4X	X (TYPE 2)	
MS 18160-4Y	Y (TYPE 2)	
MS 18160-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY

APPROVED 20 Dec 1965 REVISED © For changes see sheets 1, 2 and 3

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

User activities: Army ME, AV, WC; Navy MC; Air Force

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] from this document

P A Navy - EC	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 36 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD
Other Cust AF - 85 Army - EL			MS 18160
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 2 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.001	03	312	7 92
002	05	340	8 64
005	13	375	9 53
006	15	415	10 54
010	25	450	11 43
.057	1 45	525	13 34
.094	2 39	590	14 99
130	3.30	600	15 24
138	3 51	730	18 54
149	3.78	830	21 08
150	3 81	923	23.44
156	3 96	1 063	27.00
218	5 54	1 406	35 71
225	5 72	1 420	36 07
250	6 35	1 520	38 61
.260	6 60	1 750	44 45
287	7.29	2.125	53 98
.300	7 62		

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±. 015 (. 38 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25. 4 mm.
4. Tolerance between any two adjacent contact centers shall be ±. 004 (. 10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±. 006 (. 15 mm).
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18159 (pin body).
7. Dimensions symmetrical about centerlines.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Reference documents shall be of the issue in effect on date of invitation for bid.
10. Insert material shall be in accordance with MIL-C-28748.
11. Flatness, squareness and parallelism shall be within dimensional tolerances
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 34 pounds.
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 3 inch pounds.
15. Jackscrew wrench size 3/32 hex

APPROVED 20 Dec 1965 REVISED © For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be required from this document

P A Navy - EC Other Cus AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 36 (SIZE 16 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS 18160
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.