
FED SUP CLASS
5935

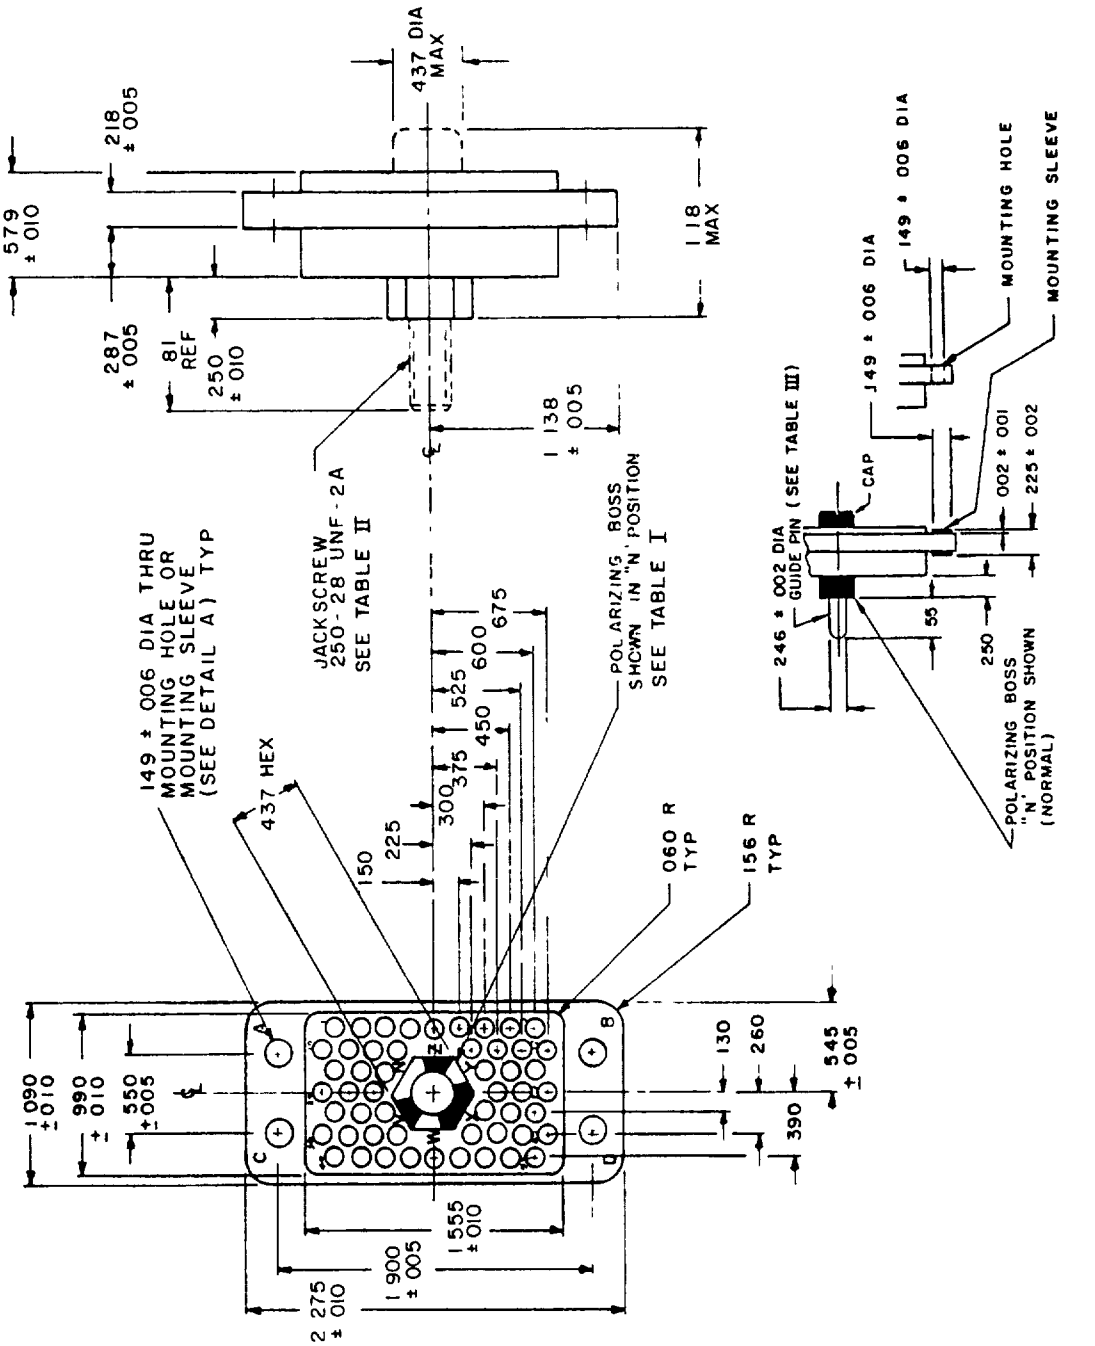

Design standard for use with MIL-C-28748 '9

(B) Entire standard revised

APPROVED 20 Dec 1965 — REVISED (A) 20 May 1970 (B) 8 July 1976

User activities: Army ME, AV, WC; Navy MC; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 99; DSA - ES

P A Navy - EC Other Cus AF - 85 Army - EL	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 52 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18161
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-11

this military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use [illegible] from its document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.




TABLE I		
TYPE	A	B
1	90°	135°
2	85°	137° 30'

TABLE II		
MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18161-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18161-1V	V (TYPE 1)	
MS 18161-1W	W (TYPE 1)	
MS 18161-1X	X (TYPE 2)	
MS 18161-1Y	Y (TYPE 2)	
MS 18161-1Z	Z (TYPE 2)	
MS 18161-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY 250-28 UNF-2B
MS 18161-2V	V (TYPE 1)	
MS 18161-2W	W (TYPE 1)	
MS 18161-2X	X (TYPE 2)	
MS 18161-2Y	Y (TYPE 2)	
MS 18161-2Z	Z (TYPE 2)	

TABLE III		
MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18161-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18161-3V	V (TYPE 1)	
MS 18161-3W	W (TYPE 1)	
MS 18161-3X	X (TYPE 2)	
MS 18161-3Y	Y (TYPE 2)	
MS 18161-3Z	Z (TYPE 2)	
MS 18161-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ± .002 I.D. TO ACCEPT GUIDE PIN
MS 18161-4V	V (TYPE 1)	
MS 18161-4W	W (TYPE 1)	
MS 18161-4X	X (TYPE 2)	
MS 18161-4Y	Y (TYPE 2)	
MS 18161-4Z	Z (TYPE 2)	

* LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use will ... from the procurement

P A Navy - EC
Other Cust
AF - 85
Army - EL

International interest

TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 52 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS

MILITARY STANDARD

MS 18161

Procurement Specification
MIL-C-28748

SUPERSEDES

SHEET 2 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2004-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
001	03	390	9 91
002	05	437	11 10
.005	13	450	11 43
006	15	525	13 34
010	25	.545	13 84
060	1 52	550	13 97
130	3.30	.579	14 71
149	3 78	600	15 24
150	3.81	675	17 15
156	3 96	.810	20 57
218	5 54	990	25 15
225	5 72	1 090	27 69
246	6 25	1 138	28 91
250	6 35	1 180	29 97
260	6 60	1 555	39 50
287	7 29	1 900	48.26
300	7 62	2 275	57 79
375	9 53		

NOTES

1. Dimensions are in inches
2. Unless otherwise specified, tolerance is ±.015 (38 mm)
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between any two adjacent contact centers shall be ±.004 (.10 mm) Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact hole details shall be in accordance with MIL-C-28748.
6. For mating connector see MS18162 (socket body).
7. Dimensions symmetrical about centerlines.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Reference documents shall be of the issue in effect on date of invitation for bid
10. Insert material shall be in accordance with MIL-C-28748
11. Flatness, squareness and parallelism shall be within dimensional tolerances
12. Center polarizing hardware may be rotated by removing retaining ring and spacer or removing cap (left hand thread) at rear of insert
13. Maximum insertion and withdrawal force (connector assembly) shall be 48 pounds.
14. Maximum torque required at jackscrew to properly engage or disengage connector shall be 4 inch pounds.
15. Jackscrew wrench size 5/32 hex.

APPROVED 20 Dec 1965 REVISED (B) For changes see sheets 1, 2 and 3

User activities: Army ME, AV, WC; Navy MC; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, SH, OS; Air Force 11, 80; DSA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A Navy - EC Other Cus AF - 85 Army - EL	International interests	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 52 (SIZE 16 CRIMP REMOVABLE) PIN CONTACTS	MILITARY STANDARD MS 18161
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.