This standard has been approved by the Department of the U S A F and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

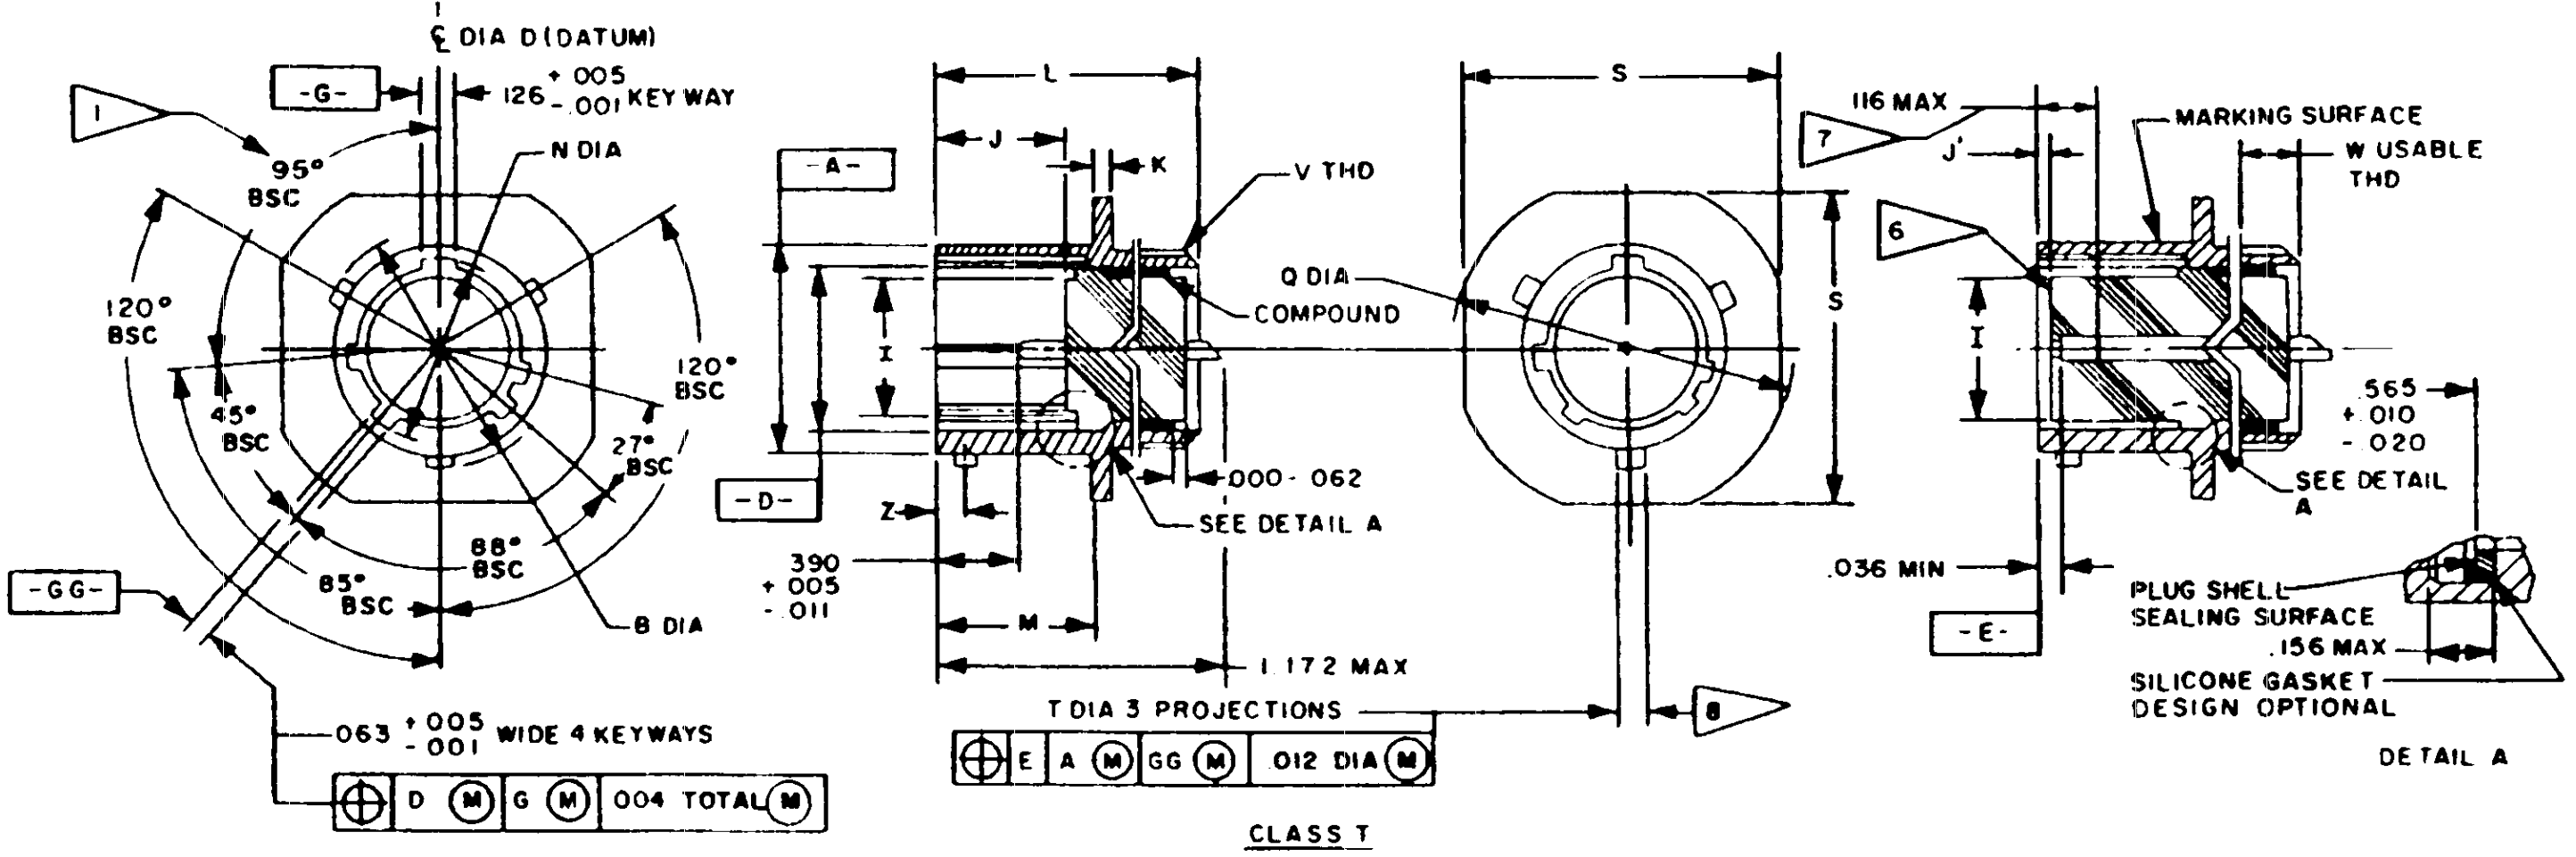

CLASS T

| SHELL SIZE | A DIA +.001 -.005 | B DIA +.000 -.016 | D DIA +.005 -.001 | I DIA ±.005 |  | J ±.005 PIN INSERT | J' ±.005 SOCK INSERT | K +.015 -.000 | L MAX | M +.000 -.005 | N DIA +.005 -.006 | Q DIA MAX | S ±.020 | T DIA +.006 -.002 | W MIN FULL THD | Z BSC | CC |  | V THD CLASS 2A (PLATED) UNEF | FOR INSERT ARR SEE DWG MS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 | .572 | 662 | 442 | 296 |  | .576 | .020 | .085 | 1.094 | .632 | 492 | 1.094 | 938 | 078 | .250 | .100 | .010 |  | 7/16-28 | 20049 |
| 11 | .700 | 810 | .570 | 413 |  |  |  |  |  |  | .620 | 1.188 | 1.031 |  |  |  |  |  | 9/16-24 | 20050 |
| 13 | 850 | 960 | .687 | .527 |  |  |  |  |  |  | 769 | 1 281 | 1.125 |  |  |  |  |  | 11/16-24 | 20051 |
| 15 | .975 | 1.085 | 812 | .652 |  |  |  |  |  |  | 894 | 1.375 | 1 219 |  |  |  |  |  | 13/16-20 | 20052 |
| 17 | 1.100 | 1.210 | .937 | .777 |  |  |  |  |  |  | 1.019 | 1 469 | 1.312 |  |  |  |  |  | 15/16-20 | 20053 |
| 19 | 1.207 | 1.317 | 1 042 | .866 |  |  |  |  |  |  | 1.124 | 1.594 | 1.438 |  |  |  |  |  | 1 1/16-18 | 20054 |
| 21 | 1.332 | 1.442 | 1.167 | 991 |  |  |  | 115 |  | .602 | 1 249 | 1.719 | 1.562 |  |  |  |  |  | 1 3/16-18 | 20055 |
| 23 | 1.457 | 1.567 | 1.292 | 1.116 |  |  |  |  |  |  | 1.374 | 1.844 | 1 688 |  |  |  |  |  | 1 5/16-18 | 20056 |
| 25 | 1.582 | 1.692 | 1.417 | 1.241 |  |  |  |  |  |  | 1 499 | 1 969 | 1 812 | .125 |  | 109 |  |  | 1 7/16-18 | 20057 |

Ⓓ FOR CHANGES SEE SHEETS 1 & 2

EXAMPLE OF PART NUMBER Ⓓ

MS20027 T 21 A 41 P A

MS NO
CLASS
SHELL SIZE
FINISH (COLOR)
INSERT ARRANGEMENT NUMBER
STYLE (P OR S)
POLARIZATION NO LETTER REQUIRED FOR NORMAL

FED. SUP CLASS
5935

APPROVED 22 JAN 65 REVISED Ⓐ 11 JAN 66 Ⓑ 9 AUG 66 Ⓒ ENTIRE STD REDRAWN 1 FEB 67 Ⓓ 20 DEC 67

P.A. 15
Other Cust Ⓓ

PROCUREMENT SPECIFICATION
MIL-C-27599 (USAF)

TITLE
CONNECTOR, LINE PLUG, ELECTRIC,
SOLDER TYPE, BAYONET COUPLING

SUPERSEDES

# MILITARY STANDARD

# MS20027

SHEET 1 OF 2

DD FORM 1 SEP 61 672-1 (Limited coordination)

EDITION OF 1 SEP 57 MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:21Z
Check the source to verify that this is the currentversion before use.

| FED. SUP CLASS |
|---|
| 5935 |

NOTES:

1. NORMAL KEYWAY POSITION.FOR OTHER KEYWAY POSITIONS SEE DETAIL A. FIGURE 2 OF PROCUREMENT SPECIFICATION
2. DIAMETERS A, D, AND Q SHALL BE CONCENTRIC WITHIN .015 T.I.R.
3. DIAMETERS D AND I SHALL BE CONCENTRIC WITHIN .005 T.I.R. AT MMC.
4. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC.
5. DIMENSIONS IN INCHES
6. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 T.I.R.
7. THE POINT AT WHICH A GAGE PIN HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE TOUCHES SOCKET CONTACT SPRING.
8. THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE.

APPROVED 1 FEB 65 REVISED Ⓓ FOR CHANGES SEE SHTS 1 & 2.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

This standard has been approved by the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

| | | |
|---|---|---|
| P.A. 15<br>Other Cust Ⓓ | TITLE<br>CONNECTOR, LINE PLUG, ELECTRIC, SOLDER TYPE, BAYONET COUPLING | **MILITARY STANDARD**<br>**MS20027** |
| **PROCUREMENT SPECIFICATION**<br>MIL-C-27599 (USAF) | **SUPERSEDES:** | SHEET 2 OF 2 |

DD FORM 1 SEP 61 672-1 *(Limited coordination)*

EDITION OF 1 SEP 57 MAY BE USED

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 505-022/8379

2

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:21Z
Check the source to verify that this is the current version before use.

200 Sample Size for Minor Defects 110 150 225 800 Sample Size for Major Defects 110 150 225