
FED. SUP CLASS
4730

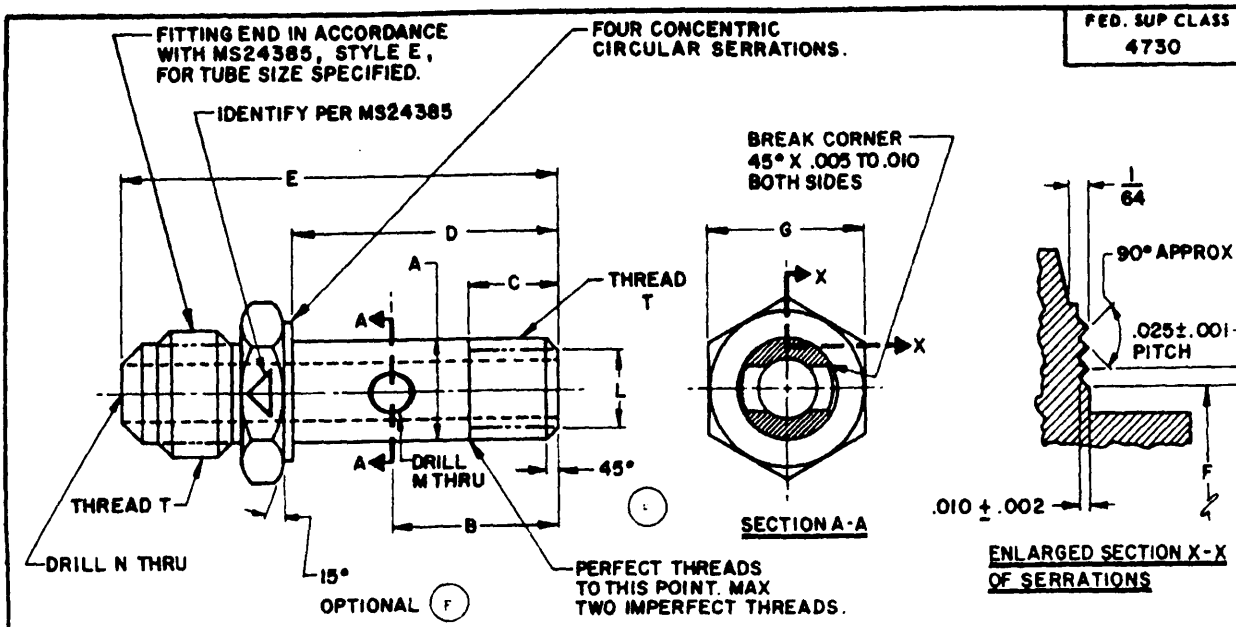

(F) (a) TOLERANCES ON DIMENSIONS C AND N IN ACCORDANCE WITH MS24385.
CONCENTRICITY: T, A - E, AND N SHALL BE CONCENTRIC WITHIN .005 TOTAL INDICATOR READING.
MATERIAL: STEEL; ALUMINUM ALLOY; CORRISION RESISTANT STEEL (CRES); TITANIUM ALLOY; (SEE PROCUREMENT SPECIFICATION).
FINISH: SEE PROCUREMENT SPECIFICATION.
BREAK ALL SHARP EDGES AND REMOVE ALL HANDLING BURRS AND SLIVERS.
NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN PLACE OF DASH FOR CRES, TYPE 304.
ADD K IN PLACE OF DASH FOR CRES, TYPE 316.
ADD S IN PLACE OF DASH FOR CRES, TYPE 347.
ADD T IN PLACE OF DASH FOR TITANIUM ALLOY.
ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.
TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
EXAMPLE OF PART NUMBERS:
MS24387-8 - BOLT, 1/2 TUBING, STEEL.
MS24387D8 - BOLT, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS24387J8 - BOLT, 1/2 TUBING, CRES, TYPE 304.
MS24387K8 - BOLT, 1/2 TUBING, CRES, TYPE 316.
MS24387S8 - BOLT, 1/2 TUBING, CRES, TYPE 347.
MS24387T8 - BOLT, 1/2 TUBING, TITANIUM ALLOY.
MS24387W8 - BOLT, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.
(F) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±5°
IN ADDITION TO THE SAMPLING REQUIREMENTS OF THE PROCUREMENT SPECIFICATION, THE CONE END SURFACE ON 100% OF THE BOLTS OF A LOT SHALL BE INSPECTED.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) DENOTES CHANGES

APPROVED 14 FEB 57 — REVISED (A) 6 MAR 58 (B) 10 FEB 67 (C) 16 JUN 78 (D) 22 MAR 79 (E) 18 APR 82 (F) 27 Jun 85

User activities:
Review activities: ARMY-ME,AV NAVY-AS DLA-CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE-82 (F) Other Cust AIR FORCE-99	TITLE BOLT, FLUID PASSAGE, PRECISION TYPE	MILITARY STANDARD MS24387
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 Limited Coordination — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. (Project No. 4730-F724)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

(F)

DASH NO.	TUBING OD	THREAD T MIL-S-8879	A +.000 -.004	B ±.010	C	D	E	F +.010 -.000 DIA	(a) G (REF)	L DIA	M DIA	(a) N (REF)
4	1/4	.437-20UNJF-3A	.435	.781	.437	1.187	1.922	.469	.688	.343	.257	.172
5	5/16	.500-20UNJF-3A	.498	.781	.437	1.187	1.922	.531	.750	.406	.319	.234
6	3/8	.562-18UNJF-3A	.560	.875	.468	1.312	2.125	.594	.813	.468	.382	.297
8	1/2	.750-16UNJF-3A	.748	1.094	.562	1.687	2.593	.781	1.000	.625	.512	.391
10	5/8	.875-14UNJF-3A	.873	1.250	.593	1.968	[illegible]	.906	1.125	.750	.625	.484
12	3/4	1.062-12UNJ -3A	1.060	1.468	.656	2.312	3.484	1.094	1.375	.937	.437	.609
16	1	1.312-12UNJ -3A	1.310	1.687	.656	2.812	[illegible]	1.344	1.625	[illegible]	.625	.844

APPROVED 14 FEB 57 REVISED (F) FOR CHANGES SEE PAGES 1 & 2.

User activities:

Review activities: ARMY - ME, AV
NAVY - AS
DLA - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE-82 Other Cust AIR FORCE-99	TITLE BOLT, FLUID PASSAGE, PRECISION TYPE	MILITARY STANDARD MS24387
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:	SHEET 2 OF 2

DD FORM 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.