
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-F-26301

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

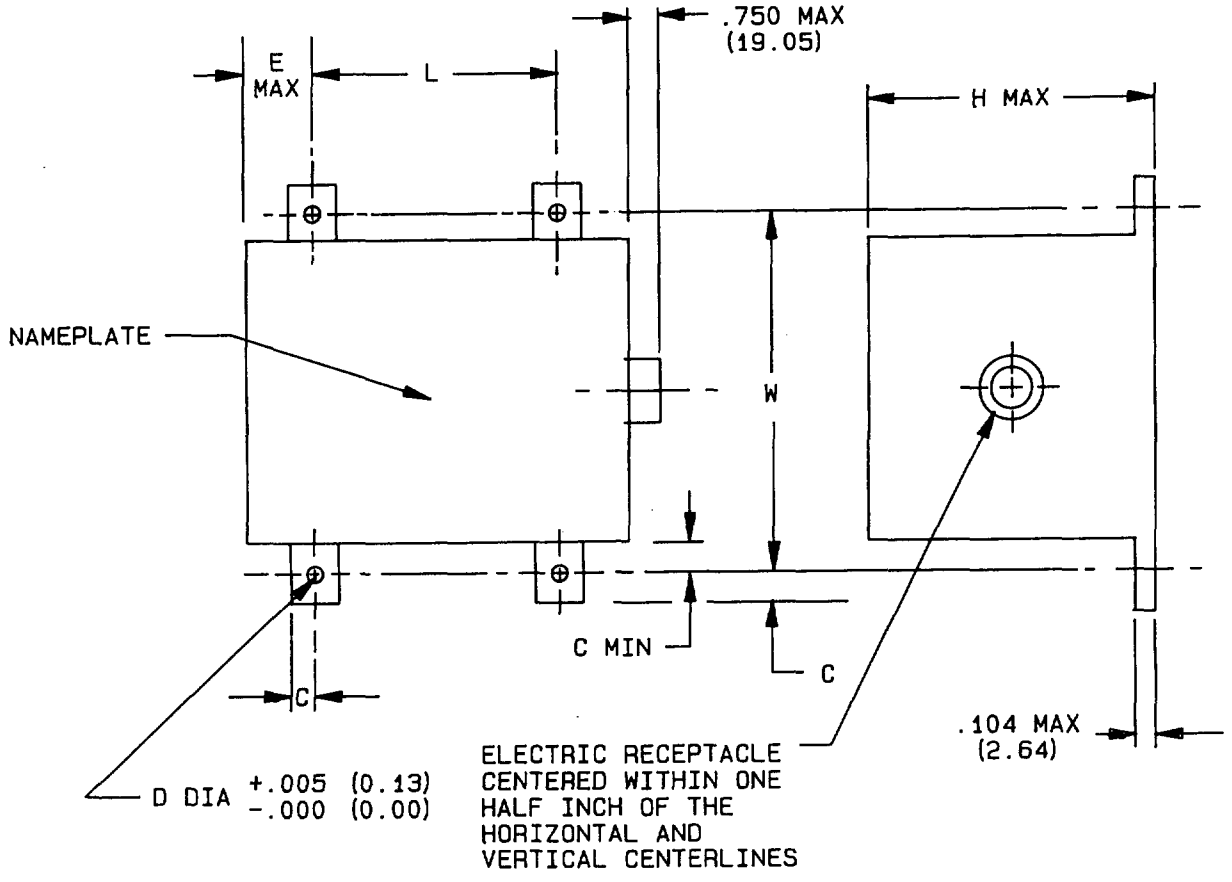

Ⓔ denotes changes

PREPARING ACTIVITY: AF - 85 CUSTODIANS: ARMY - AV NAVY - AS AIR FORCE - DLA - AGENT: DLA-ES REVIEW: ARMY - AV, NAVY - AS, USER: NAVY - MC PROJECT NUMBER: 5945-0845	MILITARY SPECIFICATION SHEET TITLE FLASHER, SOLID STATE, AIRCRAFT NAVIGATIONAL LIGHT	SPECIFICATION SHEET NUMBER MS24577E 28 Mar 1991 SUPERSEDING MS24577D 1 Oct 1973 AMSC N/A FSC 5945
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 1 of 3

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-F-26301

MS Part or Identifying Number (PIN)	Dimensions						Electric receptacle to conform to	Pin connections					Max wt (lbs)	Duration life test hours	Supersedes
	L	W	H	D	C	E		A	B	C	D	E			
24577-1 See note 11	2.000 (50.80)	2.500 (63.50)	2.594 (65.89)	.175 (4.45)	.250 (6.35)	1.125 (25.58)	MS33678-16S-8P	Not used	5.2 amp dc input	Internally connected 5 amp dc total output		---	1.5	800	Substitute MS24577-2A
24577-2A	2.000 (50.80)	2.500 (63.50)	2.594 (65.89)	.175 (4.45)	.250 (6.35)	1.125 (25.58)	MS33678-16S-8P	Not used	5.2 amp dc input	Internally connected 5 amp dc total output		Grounded internally	1.0	800	MS24577-1
24577-3 See note 11	3.000 (76.40)	5.375 (131.53)	4.500 (114.30)	.260 (6.60)	.375 (9.53)	.688 (17.48)	MS33678-16S-8P	Not used	5.2 amp dc input	5 amp dc output	5 amp	Grounded internally	2.5	1,000	
24577-4	2.750 (69.85)	3.500 (89.10)	2.594 (65.89)	.200 (5.08)	.250 (6.35)	.562 (14.27)	MS33678-14S-5P	7.7 amp dc input	7.5 amp dc output	Not used	Grounded internally	Not used	1.0	1,000	MS25204-1 (F-2) See note 12
24577-5 See note 11	2.000 (50.80)	2.500 (63.50)	2.594 (65.89)	.175 (4.45)	.250 (6.35)	1.125 (25.58)	MS3113H8-4P	Not used	1.2 amp dc input	1 amp dc output	Grounded internally	---	.5	1,000	
24577-6 See note 11	2.750 (69.85)	3.500 (89.10)	2.594 (65.89)	.200 (5.08)	.250 (6.35)	.562 (14.57)	MS33678-18-4P	0.22 amp ac input	7.5 amp ac or dc input	7.5 amp ac or dc output	Grounded internally	---	2.0	1,000	F-3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
5. The flasher need not have the shape shown, but shall be contained within the outline shown.
6. Flash rate shall be 80 ±10 F/M.
7. For allowable voltage variation see 3.5.2.
8. Allowable frequency variation ±5.0 percent of rated frequency.
9. For design feature purposes, this specification sheet takes precedence over acquistion documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitation for bid.
(E) 11. This PIN is cancelled without replacement.
12. With 2 MS25204-2 mounting adapters, supersedes F-1 Δ 28 V dc, 115 V ac.
(E) 13. First article testing shall be performed in accordance with MIL-F-26301.

PREPARING ACTIVITY: AF - 85
CUSTODIANS: ARMY - AV NAVY - AS AIR FORCE - DLA -
AGENT: DLA-ES
REVIEW: ARMY - AV, NAVY - AS, USER: NAVY - MC
PROJECT NUMBER: 5945-0845
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE: FLASHER, SOLID STATE, AIRCRAFT NAVIGATIONAL LIGHT

SPECIFICATION SHEET NUMBER: MS24577E
SUPERSEDING: MS24577D
AMSC N/A
FSC 5945

Page 2 of 3

DD Form 672, MAY 88
Previous editions are obsolete.


Form Approved OMB No. 0704-0188

Source: http://assist.dla.mil - Downloaded: 2026-10-21T14:57Z
Check to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-F-26301

Form Approved
OMB No. 0704-0188

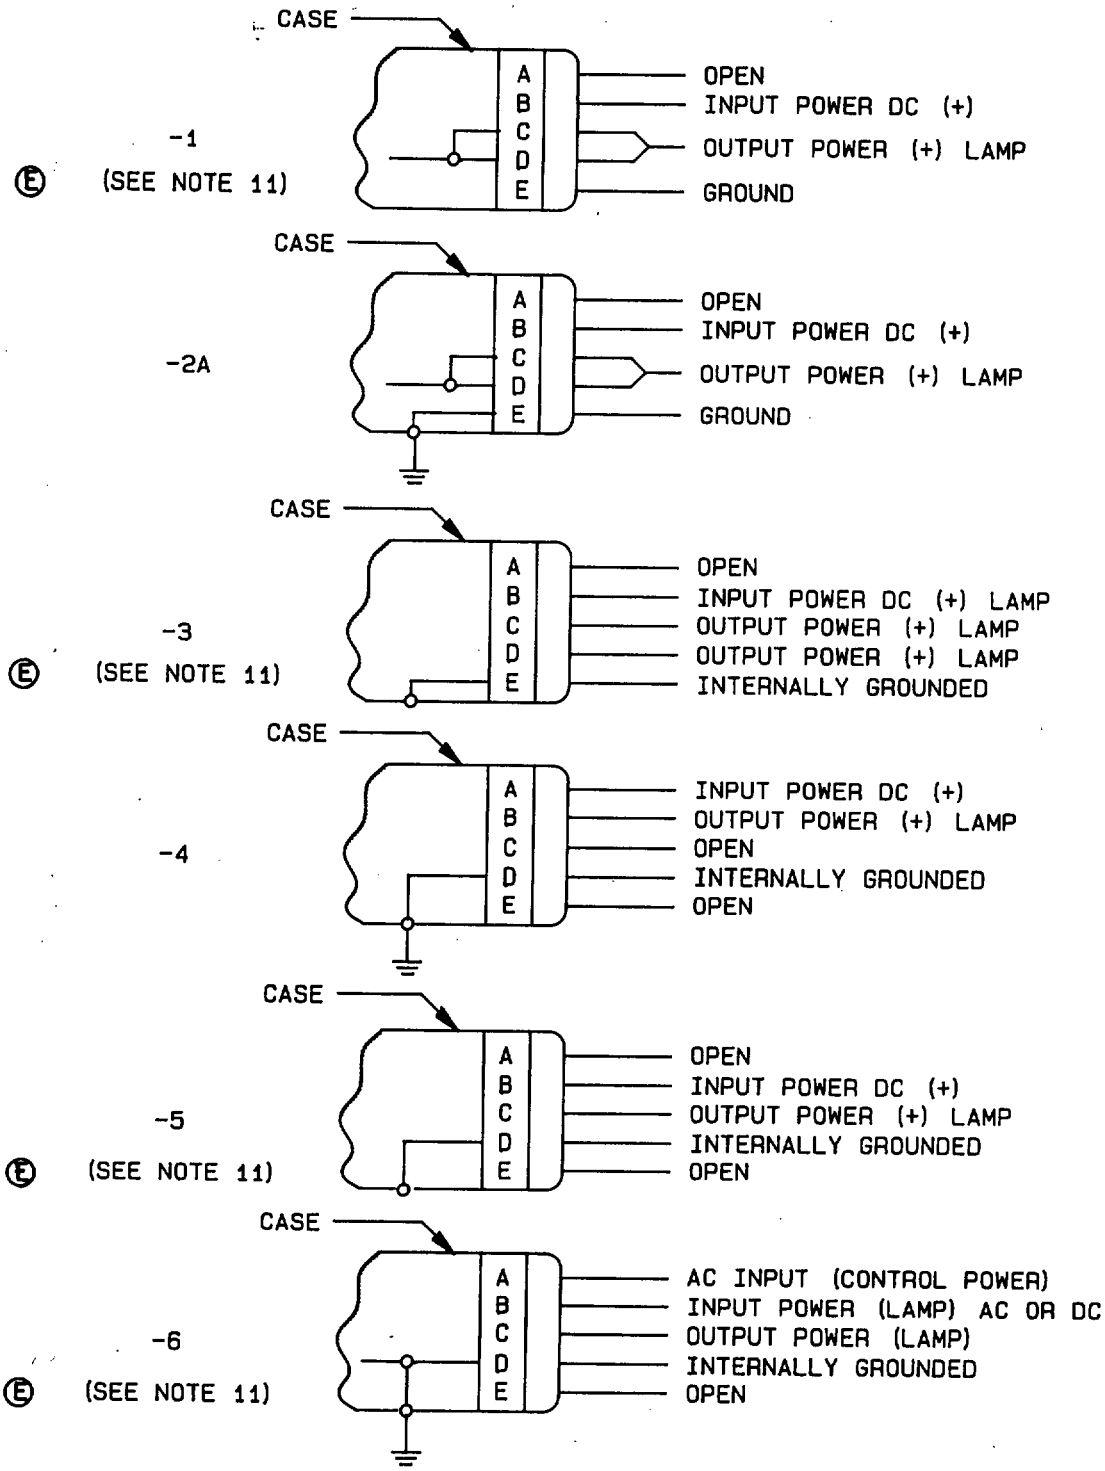

PREPARING ACTIVITY: AF - 85 CUSTODIANS: ARMY - AV NAVY - AS AIR FORCE - DLA - AGENT: DLA-ES REVIEW: ARMY - AV, NAVY - AS, USER: NAVY - MC PROJECT NUMBER: 5945-0845	MILITARY SPECIFICATION SHEET TITLE FLASHER, SOLID STATE, AIRCRAFT NAVIGATIONAL LIGHT	SPECIFICATION SHEET NUMBER **MS24577E** SUPERSEDING MS24577D AMSC N/A FSC 5945
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 3 of 3

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:57Z
Check the source to verify that this is the current version before use.