

FED. SUP CLASS
5930

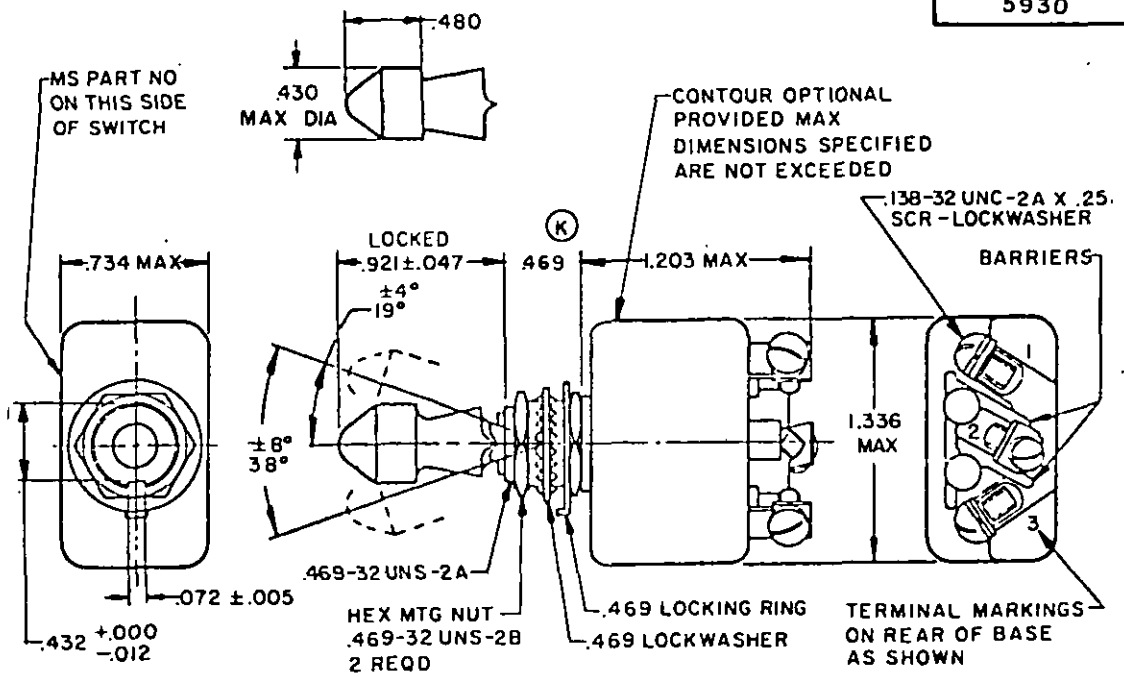

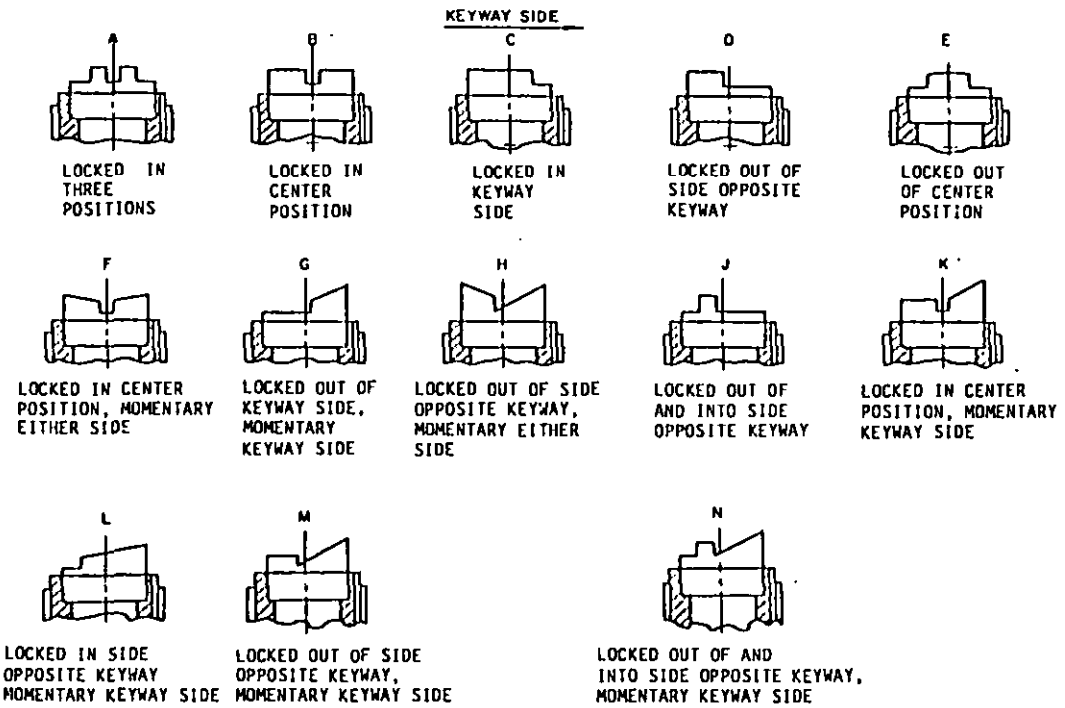

FIGURES A thru N. Illustrate the locking and momentary configurations and not the detail construction of the locking design.

(K) DENOTES CHANGE

P.A AF - 85 Other Cust ARMY-ER NAVY-AS	International Interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS24612
Procurement Specification MIL-S-8834		SUPERSEDES: MS0024612 (USAF)	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5930-1331-04

AMSC N/A

Distribution Statement A. Approved for public release; distribution is unlimited.

APPROVED 18 AUG 60 REVISED (K) 30 SEP 86

User activities: Army - Navy - Air Force -

Review activities: Army - ER, AR, MI Navy - AS, EC Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - ER,AR,MI
Navy - AS,EC
Air Force - 11,17,99

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A AIR FORCE-85
Other Cust ARMY-ER NAVY-AS
Procurement Specification MIL-S-8834

International Interest ASCCAS 12/16A

SUPERSEDES: MS0024612(USAF) 1/

TITLE SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD MS24612

PAGE 2 OF 4

FED. SUP CLASS 5930

DETAIL REQUIREMENTS

"S" DASH NO.	ENVIRONMENTAL SEALED	LOCKING COMB.	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS:			CURRENT CAPACITY AMPERES PER POLE 28 VOLTS DC			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 400 HERTZ			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 60 HERTZ		
			OPPOSITE KEYWAY SIDE	CENTER POSITION	KEYWAY SIDE	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT
212		A,B,C, D,E	ON 2-3	OFF	ON 1-2	7	25	15	7	25	15	7	20	15
222		C,E		NONE	OFF									
232					ON 1-2									
242		J,B		OFF	NONE									
262		L		NONE										
272		F,H	MOM-ON 2-3	OFF	MOM-ON 1-2									
282		K	NONE											
292		L	ON 2-3	NONE	MOM-OFF									
302			OFF		MOM-ON 1-2									
312		G,K,M N	ON 2-3	OFF										

1/ Application information ratings at room temperature.

APPROVED 18 AUG 60 REVISED (K) For changes see page 183

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - ER, AR, MI
Navy - AS, EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

P.A
AIR FORCE-85
Other Cust
ARMY-ER
NAVY-AS

International interest
ASCCAS
12/16A

Procurement Specification
MIL-S-8834

TITLE
SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

SUPERSEDES:
MS00246I2(USAF)

MILITARY STANDARD
MS24612

PAGE 3 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5930

DETAIL REQUIREMENTS

MS DASH NO. ENVIRON-MENTAL SEALED	CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS 60 HERTZ AC			CURRENT CAPACITY 1/ AMPERES PER POLE 125 VOLTS DC			CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS DC			LIFE LOW CURRENT LEVEL SWITCHING 30 mV
	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	
212										
222										
232										
242										
262										
(K) 272		10	7		750 mA	-		500 mA	-	10 mA
282										
292										
302										
312										

1/ Application information ratings at room temperature.

APPROVED 18 AUG 60

REVISED (K) FOR CHANGES SEE PAGE 1 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.

Example of part numbers:
MS24612B212 = on-off-on, environmental sealed, locked in center off position.
MS24612F272 = mom-on, off, mom-on, environmental sealed, locked in center off position.

THE MS DASH NUMBERS SUPERSEDE AND ARE COMPLETELY INTERCHANGEABLE WITH THE SUPERSEDED DASH NUMBERS.

MS DASH NO.	SUPERSEDED DASH NO. SEALED		
ENVIRON-MENTAL SEALED	TOGGLE	ENVIRON-MENTAL	TOGGLE
212	-21	-21S	-211
222	-22	-22S	-221
232	-23	-23S	-231
242	-24	-24S	-241
262	-26	-26S	-261
272	-27	-27S	-271
282	-28	-28S	-281
292	-29	-29S	-291
302	-30	-30S	-301
312	-31	-31S	-311

INCHES	mm	INCHES	mm
.005	0.13	.432	10.97
.012	0.30	.469	11.91
.047	1.19	.480	12.19
.072	1.83	.734	18.64
.138	3.51	.921	23.39
.250	6.35	1.203	30.56
.430	10.92	1.336	33.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware and terminal screw detail specification see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The superseded dash numbers are inactive for design after 20 Jul 1962.
8. Maximum weight: .1132 pound (51.4 grams).
9. Altitude requirements 80,000 feet.
10. 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.
11. Unlocking force = 4 ±1 pound.

APPROVED 18 AUG 60
REVISED: (K) For changes see page 1 of 3

User activities: Army - Navy - Air Force -
Review activities: Army - ER,AR,MI Navy - AS,EC Air Force - 11,17,99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	International interest	TITLE	MILITARY STANDARD
AIR FORCE-85 Other Cust ARMY-ER NAVY-AS	ASCCAS 12/16A	SWITCH, TOGGLE, POSITIVE BREAK, LEVER LOCK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MS24612
Procurement Specification MIL-S-8834		SUPERSEDES: MS0024612	PAGE 4 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.