This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities
Army - AR, MI
Navy - EC
Air Force - 11,17,99

User activities
Army -
Navy -
Air Force -

FED. SUP CLASS
5930

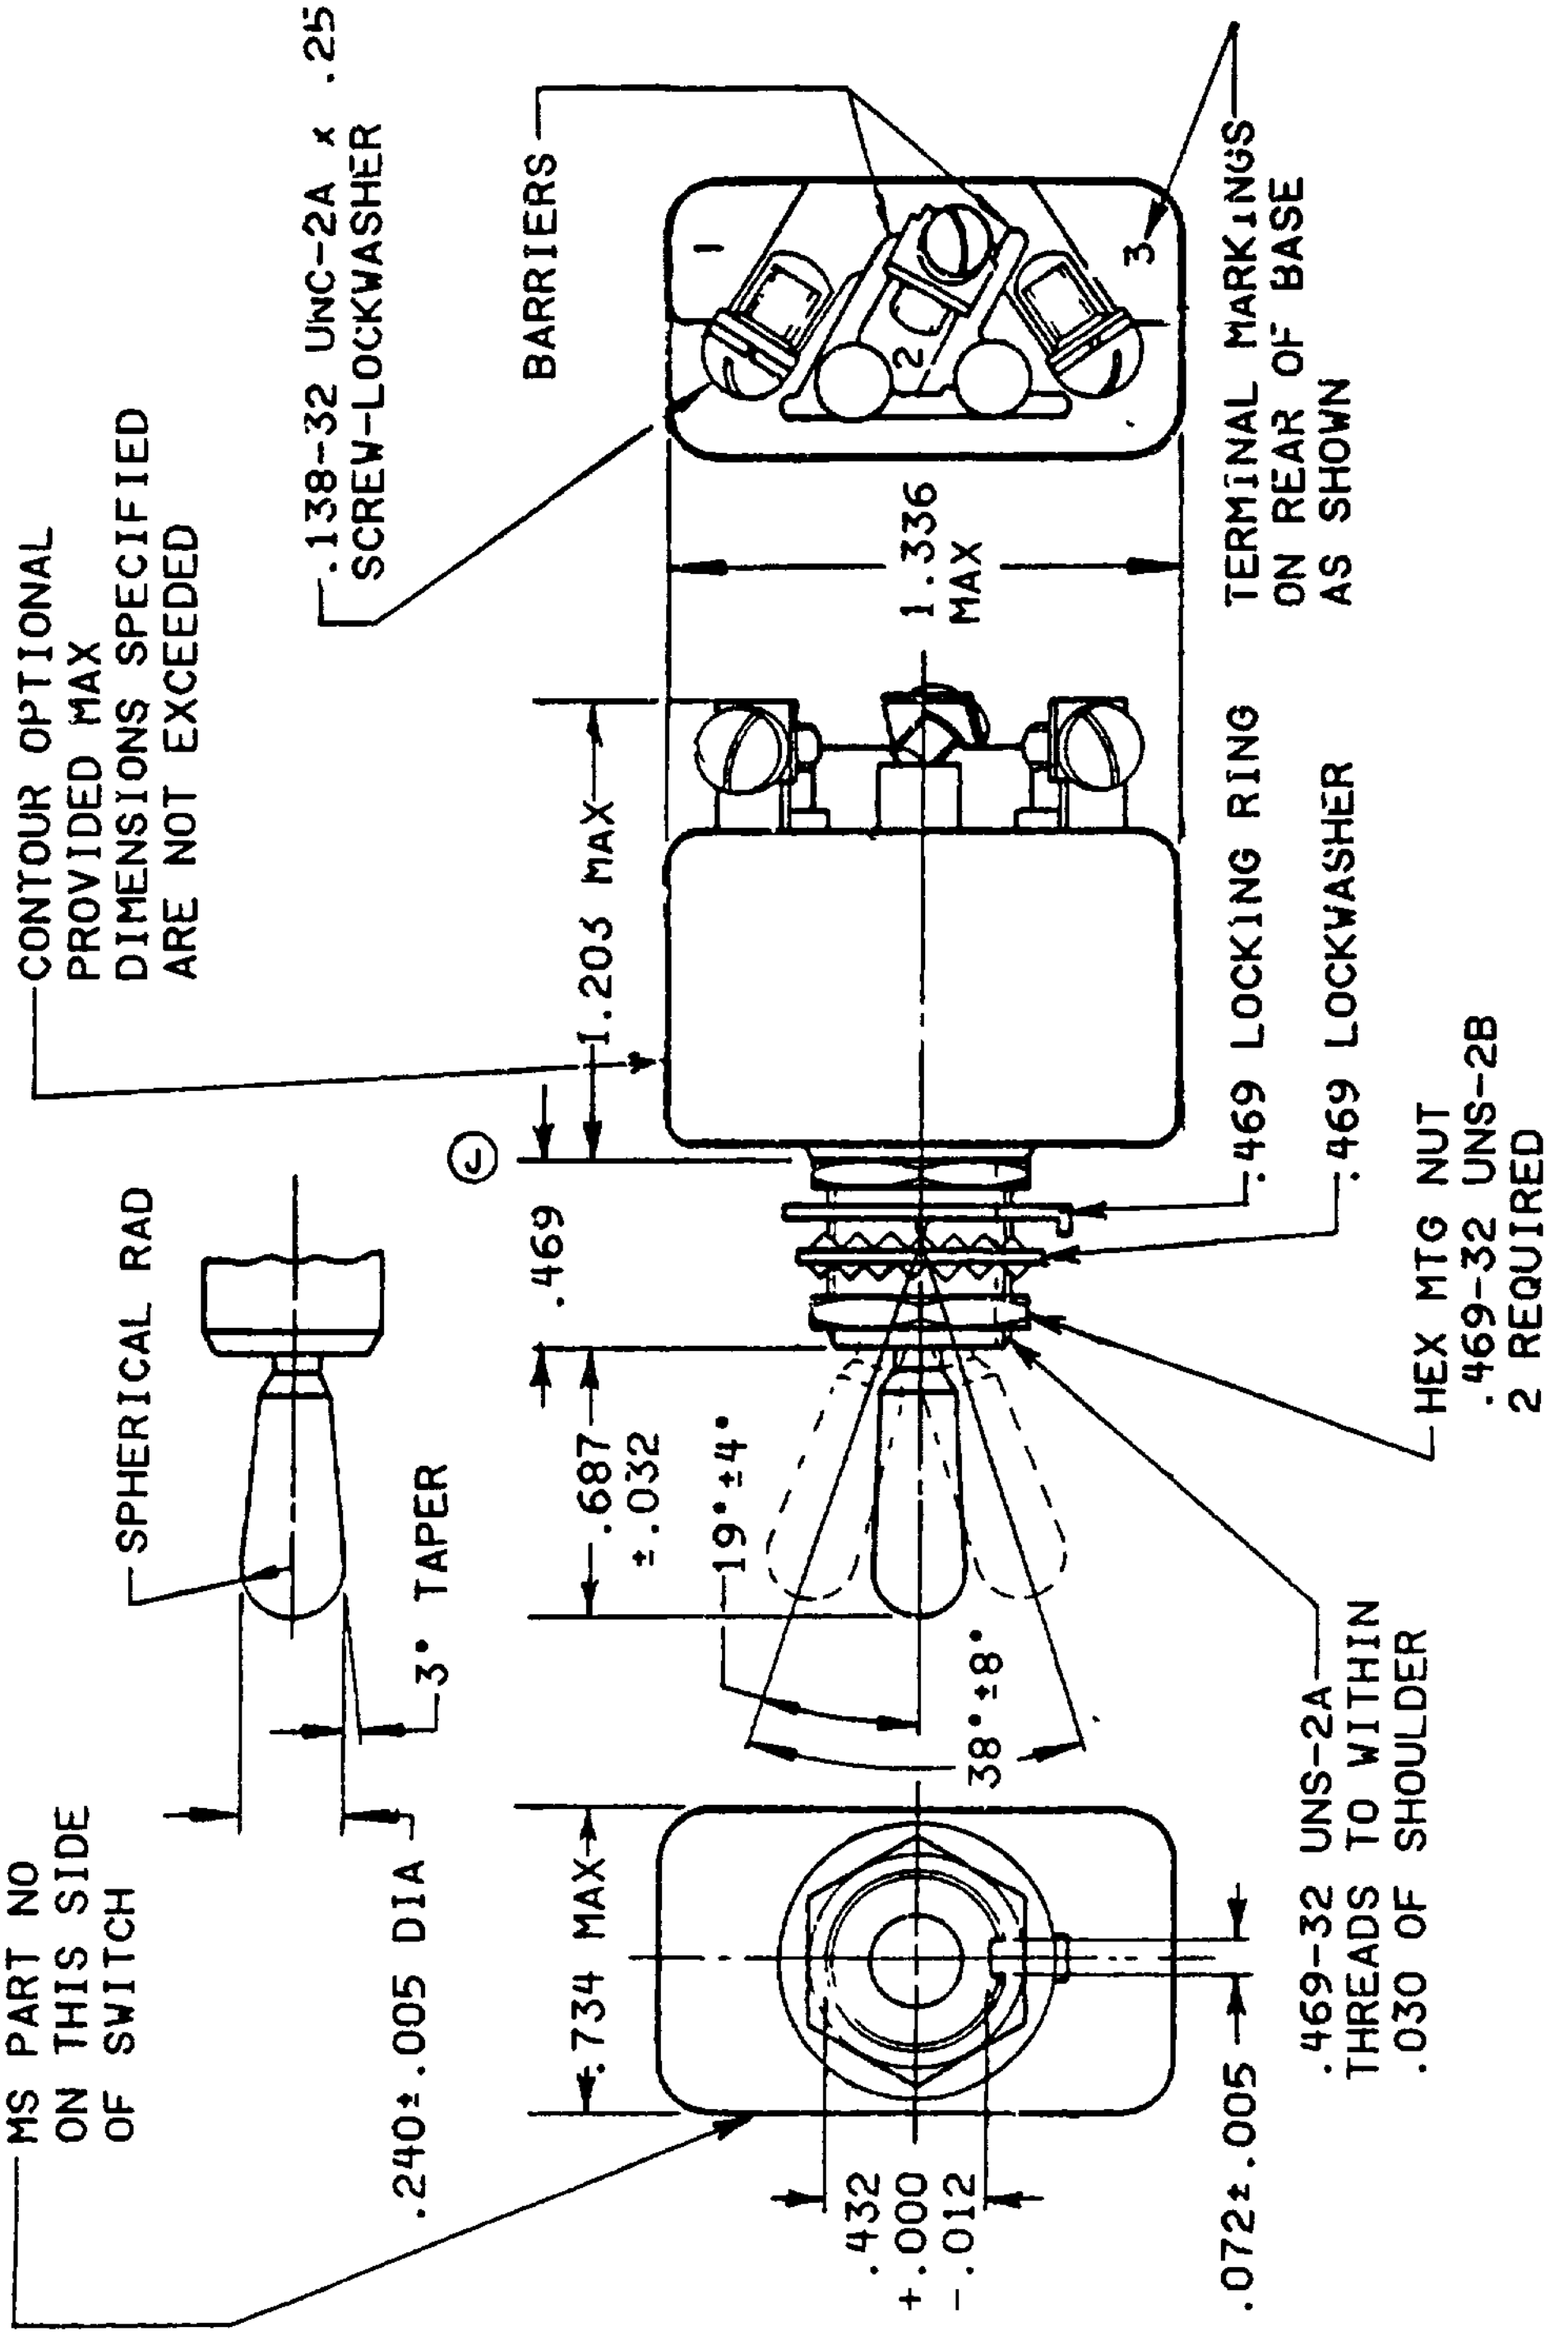
MS PART NO ON THIS SIDE OF SWITCH
.240±.005 DIA
SPHERICAL RAD
3° TAPER
CONTOUR OPTIONAL PROVIDED MAX DIMENSIONS SPECIFIED ARE NOT EXCEEDED
.138-32 UNC-2A x .25 SCREW-LOCKWASHER
BARRIERS
1
2
3
TERMINAL MARKINGS ON REAR OF BASE AS SHOWN
1.336 MAX
1.205 MAX
J
.469
.687 ±.032
19°±4°
38°±8°
.734 MAX
.432 +.000 -.012
.072±.005
.469 LOCKING RING
.469 LOCKWASHER
HEX MTG NUT .469-32 UNS-2B 2 REQUIRED
.469-32 UNS-2A THREADS TO WITHIN .030 OF SHOULDER

Ⓙ Denotes change

APPROVED 28 Aug 58

REVISED Ⓓ 11 Jul 72 Ⓔ 24 Jul 1973 Ⓕ 23 Aug 76 Ⓖ 20 Mar 81 Ⓗ 18 Oct 85 Ⓙ 30 SEP 86

P A Air Force-85 Other Cust Army-ER Navy-AS	International Interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 25306
Procurement Specification MIL-S-8834		SUPERSEDES MS0025306(USAF)	PAGE 1 OF 3

DD FORM 1 MAY 73 672 (Continued...)

5930-1331-07

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC N/A

FED SUP CLASS
5930

DETAIL REQUIREMENTS.

MS DASH NO. ENVIRONMENTAL SEALED	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS.			CURRENT CAPACITY AMPERES PER POLE 28 VOLTS DC			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 400 HERTZ			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 60 HERTZ		
	OPPOSITE KEYWAY SIDE	CENTER POSITION	KEYWAY SIDE	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT
-212	ON 2-3	OFF	ON 1-2	7	25	15	7	25	15	7	20	15
-222		NONE	OFF									
-232			ON 1-2									
-242		OFF	NONE									
-262		NONE	MOM-ON 1-2									
-272	MOM-ON 2-3	OFF										
-282	NONE											
-292	ON 2-3	NONE	MOM-OFF									
-302	OFF		MOM-ON 1-2									
-312	ON 2-3	OFF										

MS DASH NO. ENVIRONMENTAL SEALED	CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS 60 HERTZ AC			CURRENT CAPACITY 1/ AMPERES PER POLE 125 VOLTS DC			CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS DC			LIFE LOW CURRENT LEVEL SWITCHING 30 mV	SUPERSEDED DASH NUMBER
	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT	LAMP LOAD CIRCUIT	RESIS-TIVE CIRCUIT	INDUC-TIVE CIRCUIT		TOGGLE SEALED
-212		10	7		750 mA	-		500 mA	-	10 mA	-211
-222											-221
-232											-231
-242											-241
-262											-261
-272											-271
-282											-281
-292											-291
-302											-301
-312											-311

Ⓙ

1/ Application information ratings at room temperature

User activities
Army -
Navy -
Air Force -

Review activities
Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

REVISED Ⓙ For changes see pages 1 & 2

APPROVED 28 Aug 58

P A Air Force-85 Other Cust Army-ER Navy-AS	International interest ASCCAS 12/16A	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, 469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS 25306
Procurement Specification MIL-S-8834		SUPERSEDES MS0025306(USAF)	PAGE 2 OF 3

FED. SUP CLASS
5930

INCHES	mm	INCHES	mm
.005	0.13	.25	6.35
.012	0.30	.432	10.67
.030	0.76	.469	11.91
.032	0.81	.687	17.45
.072	1.83	.734	18.64
.138	3.51	1.203	30.56
.240	6.10	1.336	33.93

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .010 (0.25 mm) on decimals and ± 5° on angles.
4. For hardware and terminal screw detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition ducuments referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The MS dash numbers supersede and are completely interchangeable with the superseded dash numbers.
8. Example of part numbers
   MS25306-212 = ON-OFF-ON, environmentally sealed switch.
   MS25306-272 = MOM-ON, OFF, MOM-ON environmentally sealed switch.
9. Maximum weight: .0953 pound (43.2 grams).
10. Altitude requirements: 80,000 feet.
11. 115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

APPROVED 28 Aug 58 REVISED ① For changes see pages 1 & 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities
Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities
Army -
Navy -
Air Force -

P A
Air Force-85

Other Cust
Army-ER
Navy-AS

International interest
ASCCAS
12/16A

TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS 25306

Procurement Specification
MIL-S-8834

SUPERSEDES
MS0025306(USAF)

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE