FED. SUP CLASS
4730

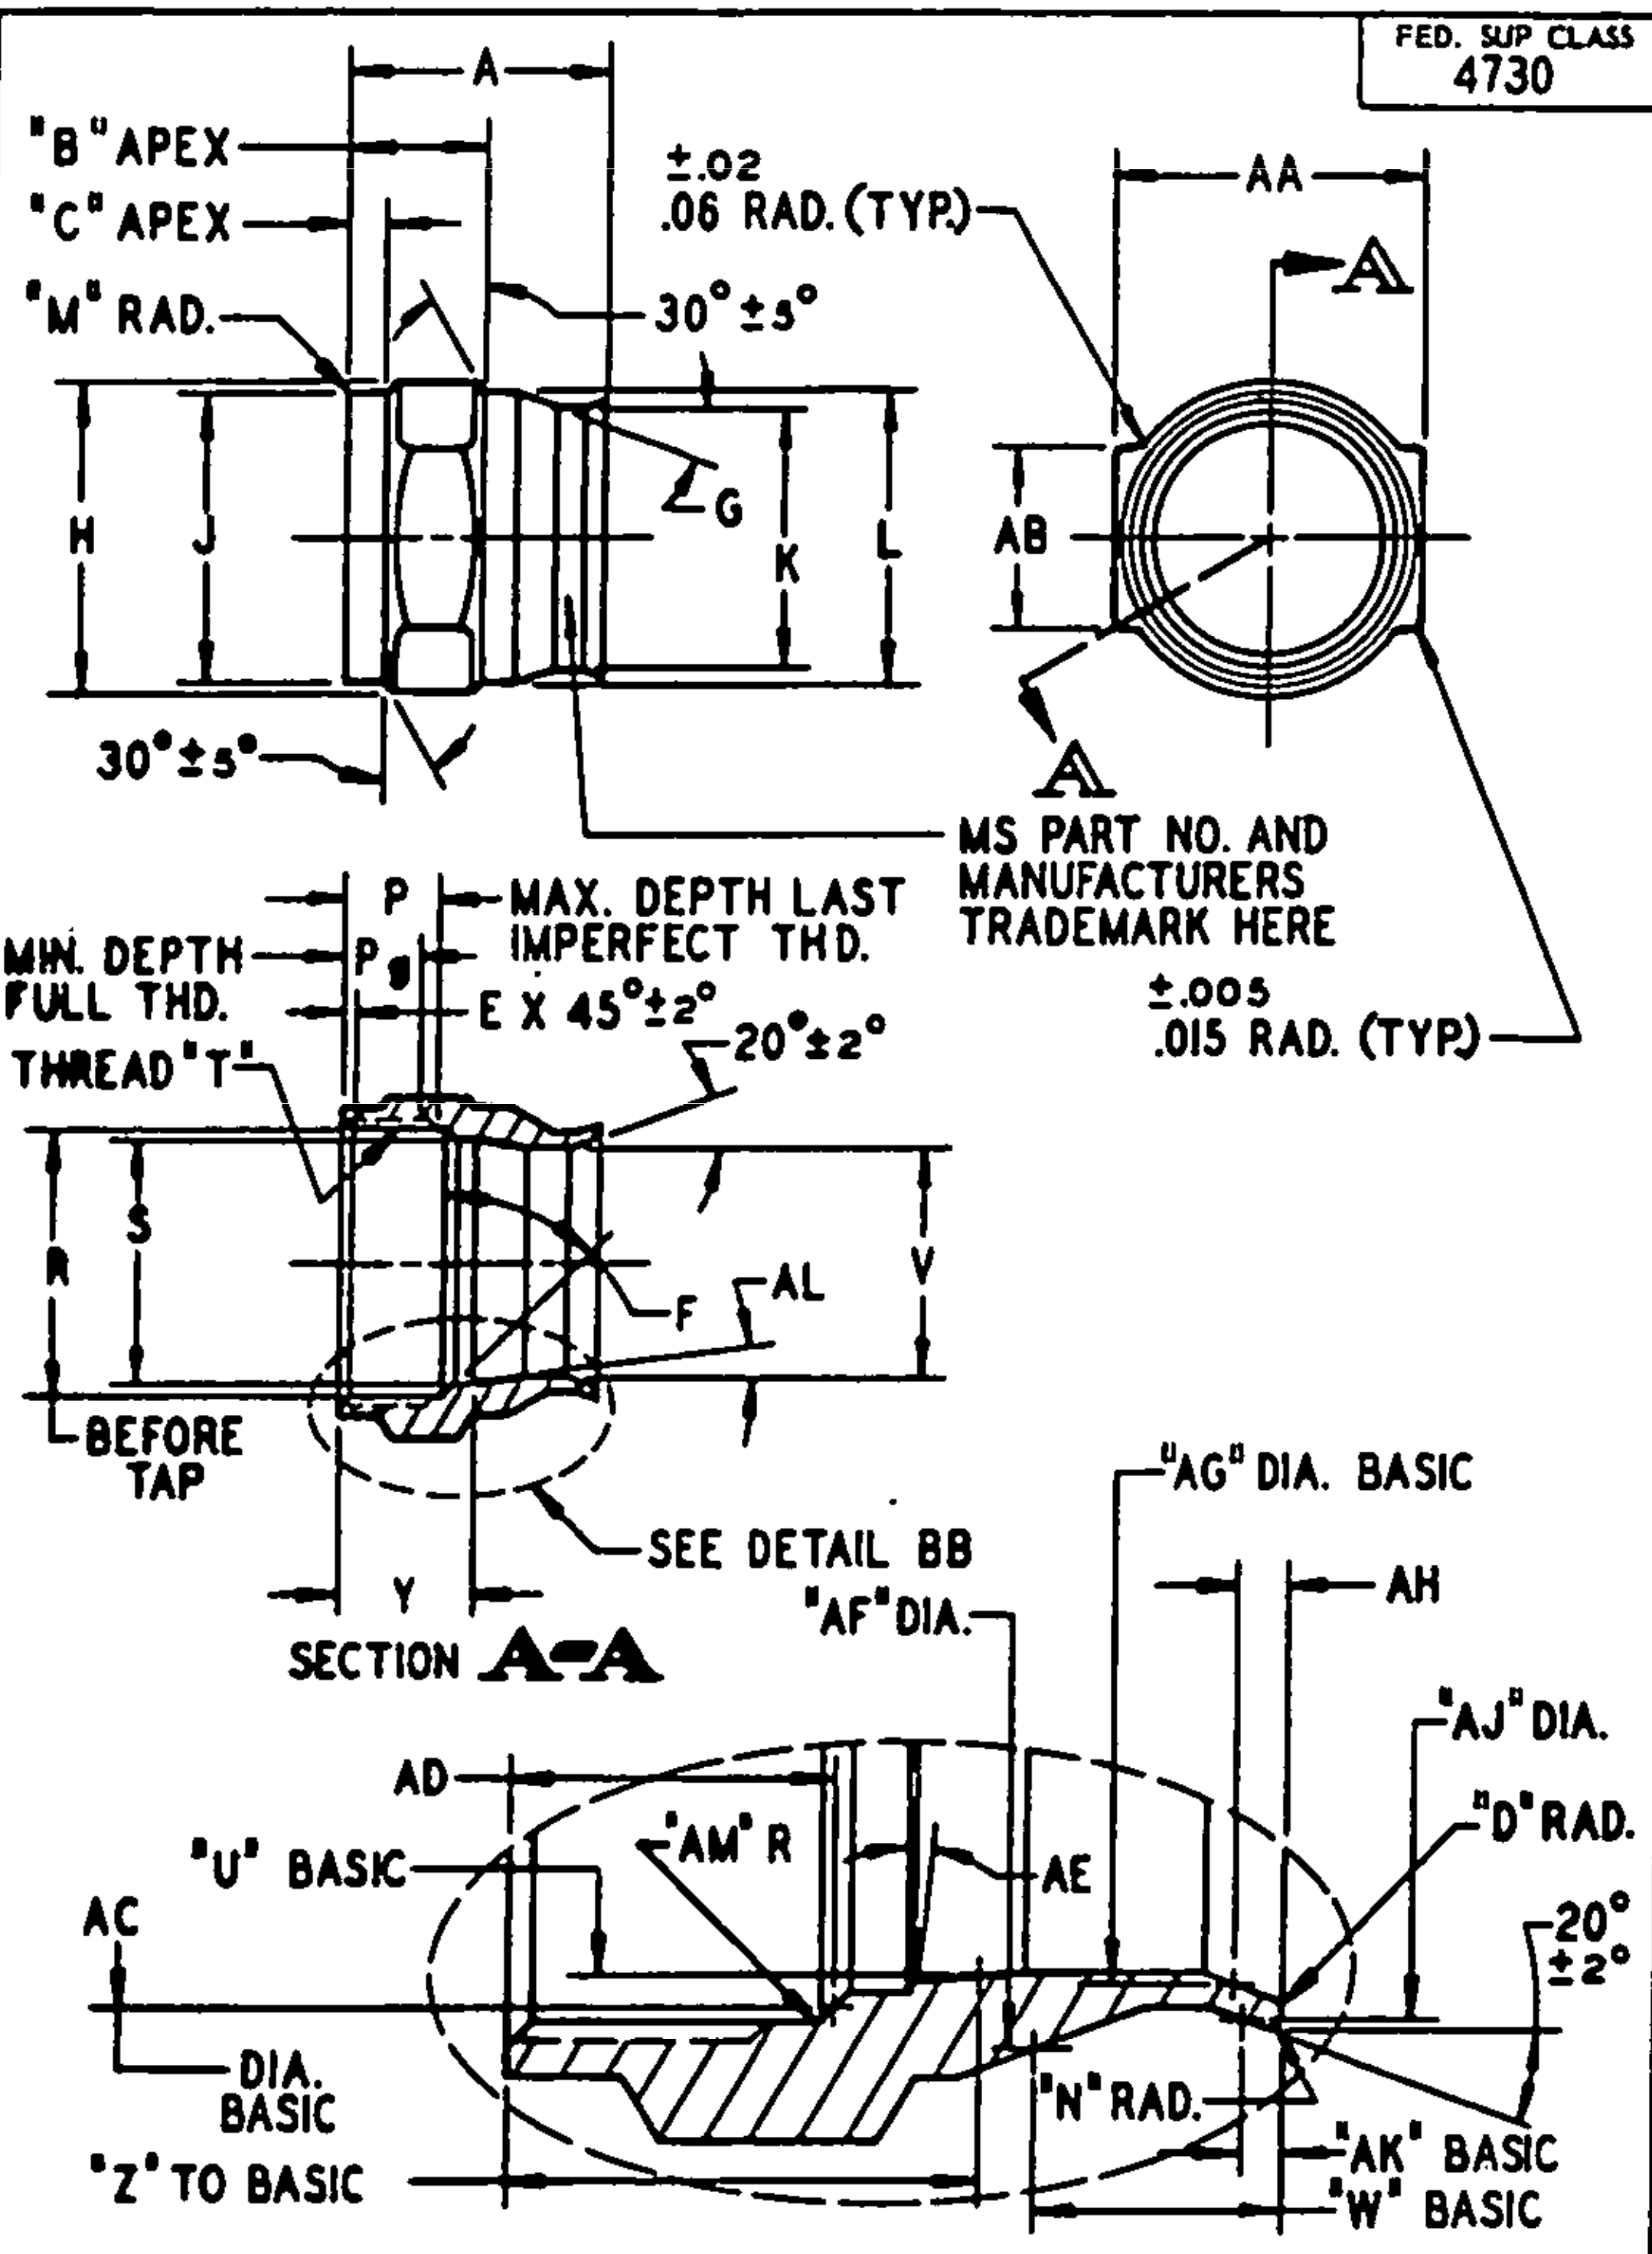

Ⓔ FOR CHANGES SEE SHEET 3.

Review Activities:
Army - AV
Navy - AS
Air Force - 11,82

User Activities:
Army - MI
Navy - SH

APPROVED 1 SEP 61 REVISED Ⓐ 2 JUL 63 Ⓑ 13 JAN 64 Ⓒ 2 MAY 66 Ⓓ 8 AUG 66 Ⓔ 6 MAR 69

NOTE: The Government has a royalty free license under the following listed patents for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U. S. Patent Nos. 2,833,567; 3,011,163; 3,055,682)

This military standard is approved by the Department of Defense and is mandatory on all activities. Direction for all new engineering and design applications and for repetitive use shall be made from this document

P.A. AIR FORCE-11 Other Cust ARMY- AV NAVY- AS	TITLE SOCKET, HOSE COUPLING	MILITARY STANDARD MS27069
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
4730

(a) MS27069-3C IS INACTIVE FOR DESIGN AFTER 2 MAY 1966 USE ONLY FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT. USE MS27069-4C FOR DESIGN.

THREADS PER SPEC MIL-S-7742.

MATERIAL: CORROSION RESISTING STEEL, CLASS 304, COND "B", SPEC QQ-S-763. MIN YIELD: 60,000 PSI ON -4C THRU -12C, 50,000 PSI ON -16C AND 45,000 PSI ON -20C AND -24C.

PASSIVATE PER PROCUREMENT SPECIFICATION.

THREADS ON -8C THRU -24C SHALL BE DRY-FILM LUBRICATED IN ACCORDANCE WITH MIL-L-8937. NO OVERSPRAY ALLOWED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: RADIUS OR BREAK ALL CORNERS .005,+.005/-.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ASA B46.1-1962 NOT TO EXCEED 125 RHR. ALL DIAMETERS MUST BE CONCENTRIC WITHIN .005 TIR.

THIS PART FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

NEXT ASSEMBLY MS27053 THRU MS27060.

MS PART NUMBER	A ±.010	B ±.010	C ±.010	D ±.005	E		F	G ±1/2°
MS27069-4C	.806	.385	.120	.015	.030	±.005	30°	15 1/2°
MS27069-5C	.834				.031	±.015		14 1/2°
MS27069-6C	.853	.400	.110					14°
MS27069-8C	.979	.440	.160					17°
MS27069-10C	1.080	.505	.190	.020				18°
MS27069-12C	1.152	.540	.200		.035	±.005	60°	16°
MS27069-16C	1.255	.655	.185		.040		45°	20°
MS27069-20C	1.510	.815	.235				30°	23°
MS27069-24C	1.582	.900	.250				45°	22°
(a) MS27069-3C	.625	.345	.090	.010	.020	±.005	45°	16°

H ±.005	J ±.005	K ±.005	L ±.005	M		N		P MAX	Pg MIN
.562	.558	.440	.558	.010	±.005	.030 MAX.		.310	.210
.625	.620	.514	.620					.335	.235
.688	.683	.582	.683					.320	.215
.875	.870	.700	.870	.030 MAX.				.365	.235
1.000	.995	.822	.995			.015	±.005	.410	.270
1.125	1.120	.942	1.120					.435	.360
1.500	1.495	1.270	1.495					.490	.380
1.875	1.870	1.520	1.870					.695	.495
2.125	2.120	1.816	2.120					.782	.607
.438	.436	.380	.436	.010	±.005	.030	MAX	.250	.200

User Activities:
Army - MI
Navy - SH

Review Activities:
Army - AV
Navy - AS
USAF - 11,82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 1SEP 61 REVISED (E) FOR CHANGES SEE SHEET 3.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U. S. Patent Nos. 2,833,567; 3,046,163; 3,055,692)

P A USAF - 11
Other Cust ARMY - AV
NAVY - AS
Procurement Specification
MIL-F-27272

TITLE
SOCKET, HOSE COUPLING

SUPERSEDES:

MILITARY STANDARD
MS27069
SHEET 2 OF

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

FED. SUP. CLASS
4730

R		S +.000 −.005	THREAD "T"	PITCH DIAMETER	U
.461	+.007 −.000	——	1/2-28 UNEF-3B	.4804/.4768	.3785
.517		——	9/16-24 NEF-3B	.5392/.5354	.4410
.580		——	5/8-24 NEF-3B	.6018/.5979	.5030
.705	+.005/−.000	——	3/4-24 NS-3B	.7269/.7229	.6195
.821	+.008 −.000	——	7/8-20 UNEF-3B	.8468/.8425	.7245
.946		——	1-20 UNEF-3B	.9719/.9675	.8665
1.315		1.225	1 3/8-18 NEF-3B	1.3436/1.3389	1.1700
1.627	+.009/−.000	1.500	1 11/16-18 NEF-3B	1.6563/1.6514	1.4425
1.870	+.008/−.000	1.815	1 15/16-16 N-3B	1.9021/1.8969	1.7185
.341	+.006/−.000	——	3/8-32 NEF-3B	.3580/.3547	.2990

Ⓔ V		W	Y ±.005	Z		AA ±.005	AB ±.015	AC
.348	+.005 −.000	.1826	——	.436	+.013/−.000	.562	.325	.4362
.411		.2035	——	.447	±.006	.625	.361	.4928
.478	+.006/−.000	.2403	——	.430	+.013/−.000	.688	.397	.5560
.590	+.005/−.000	.2169	——	.527	+.011/−.000	.875	.505	.6832
.692	+.006/−.000	.2423	——	.592	+.007/−.000	1.000	.578	.8008
.825	+.007/−.000	.2738	——	.631	±.004	1.125	.650	.9295
1.140	+.005 −.000	.4009	.648	.756	+.009/−.000	1.500	.866	1.2708
1.390		.4480	.905	.994	±.008	1.875	1.082	1.5645
1.713	±.005	.4538	.942	1.101	±.005	2.125	1.227	1.8432
.273	+.005/−.000	.1465	——	.349	±.008	.438	.252	.3332

AD ±.005	AE	AF ±.005	AG	AH ±.010	AJ ±.005	AK	AL ±1/4°	AM MAX
.328	——	.450	.3878	.051	.450	.0545	9°	——
.353	——	.525	.4568	.059	.525	.0552	8°	——
.338	——	.601	.5290	.066	.601	.0668		——
.385	——	.713	.6362	.060	.713	.0579		——
.427	——	.844	.7500	.075	.844	.0567	9°	——
.463	——	.969	.8818	.073	.969	.0647	8°	——
.524	3° MAX.	1.397	1.2038	.084	1.298	.0649	7°	——
.786	3°±2°	1.710	1.4488		1.545	.0615	8°	——
.827		1.993	1.7424	.079	1.849	.0426	6°	.015
.260	——	.383	.3152	.055	.383	.0442	8°	——

APPROVED 1 SEP 61 REVISED Ⓔ FOR CHANGES SEE SHEET 3.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U. S. Patent Nos. 2,[illegible]33,567; 3,[illegible],163; 3,055,692)

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Review activities:
Army - AV
Navy - AS
Air Force - 11,82

User Activities:
Army - ME
Navy - SH

P A USAF-11

Other Cust ARMY-AV
NAVY-AS

Procurement Specification
MIL-F-27272

SUPERSEDES

TITLE
SOCKET, HOSE COUPLING

MILITARY STANDARD
MS27069

SHEET 3 OF

DD FORM 1 SEP 57 672