

FED. SUP CLASS
5120

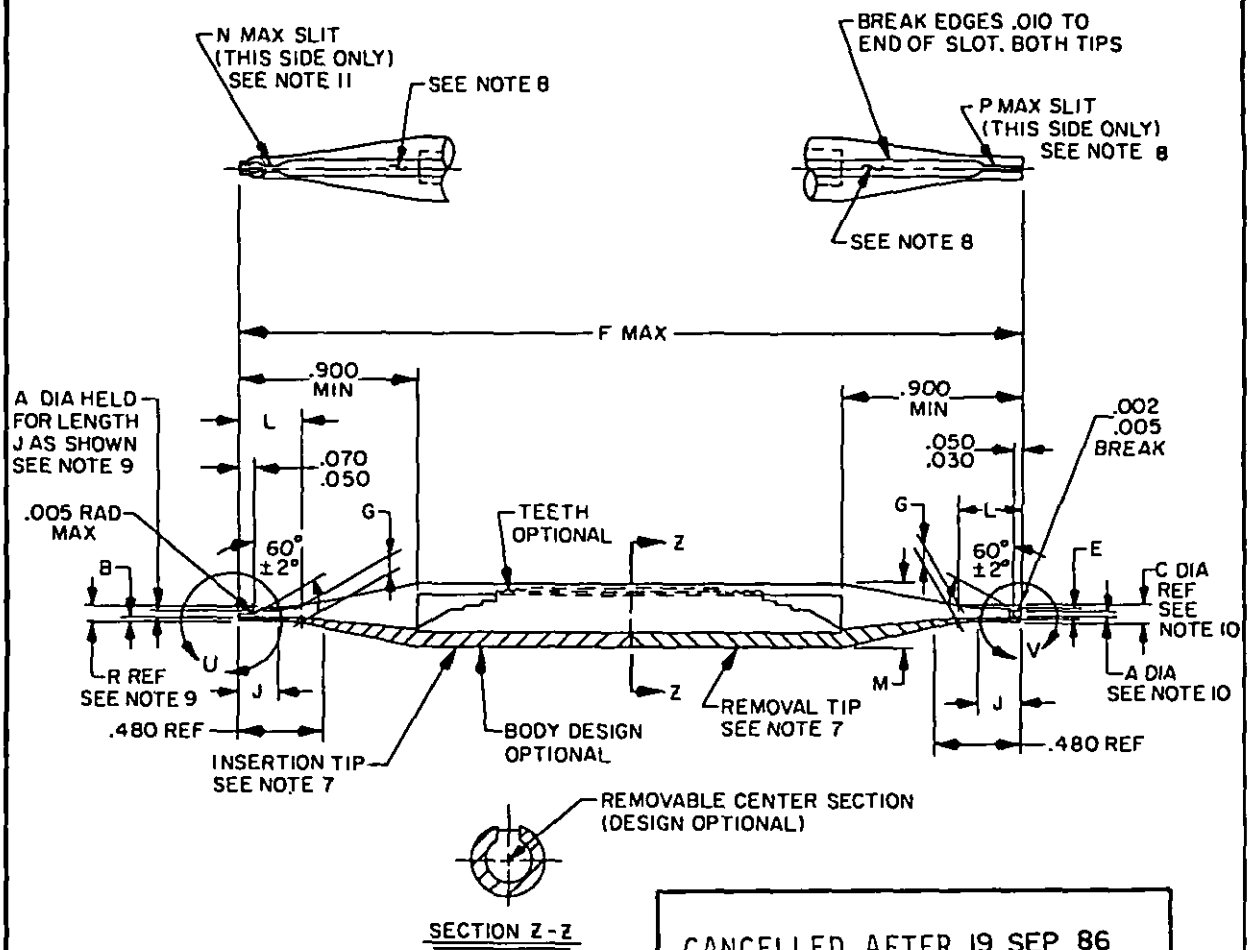


SECTION Z-Z

CANCELLED AFTER 19 SEP 86
USE MIL-I-81969/14

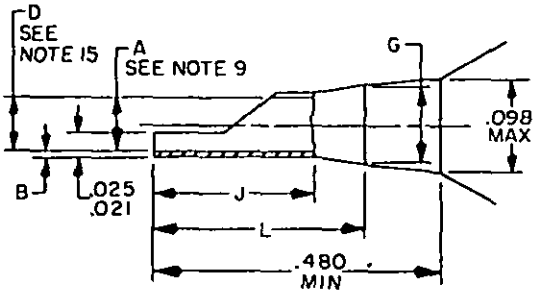

VIEW U
ENLARGED

SIZE 22D

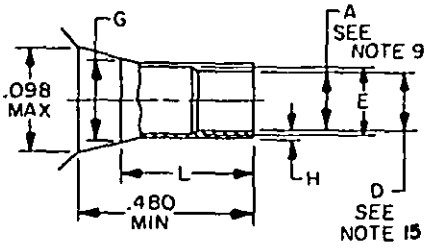

VIEW V
ENLARGED

Ⓑ ENTIRE STANDARD REVISED

P.A. AF-85 Other Cust Army-CR Navy-AS	International interest	TITLE TOOL, CONTACT INSERTION-EXTRACTION, ELECTRICAL CONNECTOR	MILITARY STANDARD MS27534
Procurement Specification		SUPERSEDES:	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5120-B090

AMSC N/A

User activities: Army - Navy - Air Force -


Review activities: Army - CR Navy - EC Air Force - 85

APPROVED 6 FEB 74 REVISED Ⓑ 19 SEP 86

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

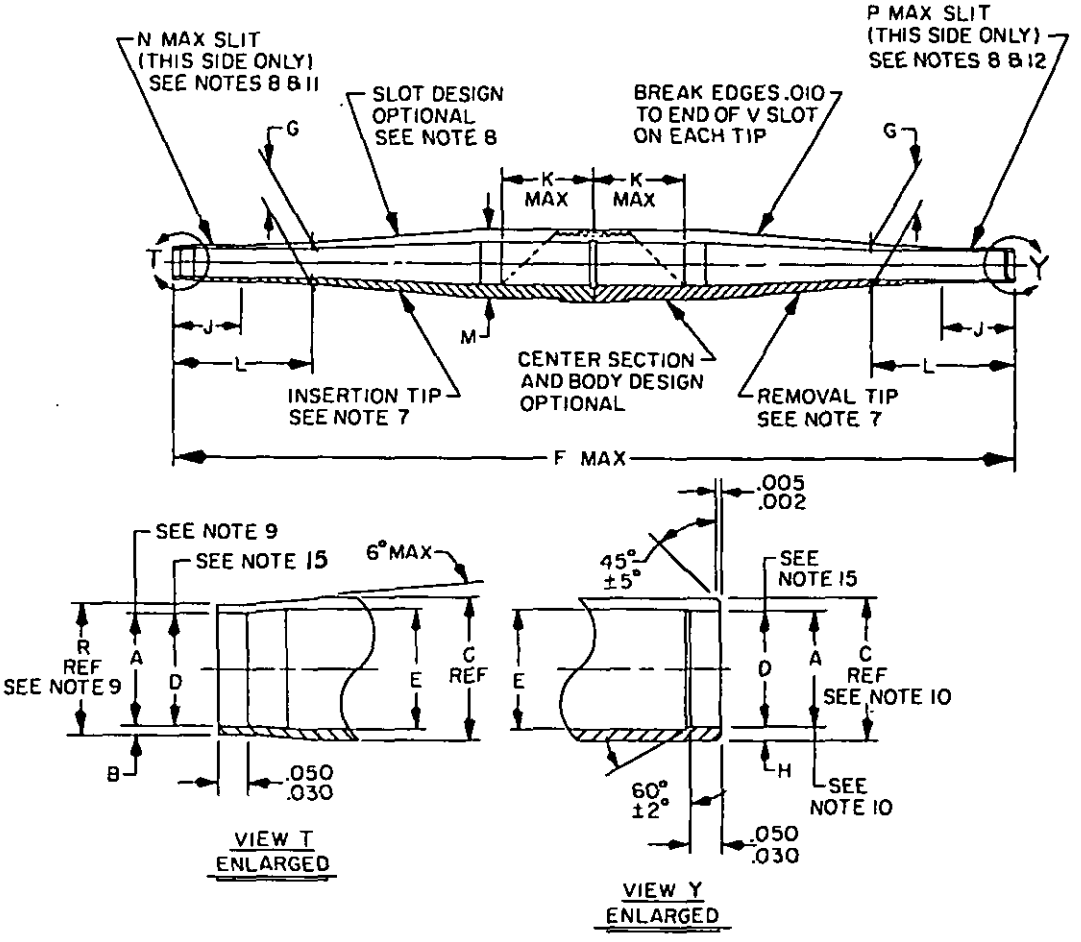

SIZES 20, 16 & 12

APPROVED 6 FEB 74 REVISED (B) ENTIRE STANDARD REVISED.

User activities: Army - Navy - Air Force -

Review activities: Army - AR Navy - EC Air Force - 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AF - 85	International interest:	TITLE	MILITARY STANDARD
Other Cust Army - ER Navy - AS		TOOL, CONTACT INSERTION-EXTRACTION, ELECTRICAL CONNECTOR	MS27534
Procurement Specification		SUPERSEDES:	PAGE 2 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC
Air Force - 85

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. AF 85

Other Cust Army-ER Navy-AS

Procurement Specification

International interest

SUPERSEDES:

TITLE

TOOL, CONTACT INSERTION-EXTRACTION, ELECTRICAL CONNECTOR

MILITARY STANDARD

MS27534

PAGE 3 OF 4

FED. SUP CLASS 5120

Part number	Contact size	A dia max	B	C dia ±.0005	D Dia		E min	F max	G max dia	H	J min	K	L min	M dia max	N max see note 11	P max see note 12	R dia ±.0005
					Insert tip max	Remo tip min											
MS27534-22D	22D	.048	.0085 .0075	.0650	.048	.054	.053	4.500	.077	.0085 .0075	.202	--	.31	.290	.009	.009	.0650
MS27534-20	20	.067	.009 .008	.0960	.070	.078	.079	"	.150	.0145 .0135	.310	.505	.760	.290	.009	.009	.0870
MS27534-16	16	.103	.010 .009	.1350	.103	.103	.112	"	.180	.016 .015	.370	.580	.760	.440	.009	.009	.1220
MS27534-12	12	.153	.012 .010	.1890	.151	.151	.160	"	.240	.018 .016	.370	.700	.760	.440	.009	.009	.1770

Color chart (see note 7)		
22D	Green	White
20	Red	
16	Blue	
12	Yellow	

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0005	0.01	.018	0.46	.067	1.70	.103	2.62	.1890	4.80
.002	0.05	.021	0.53	.070	1.78	.105	2.67	.202	5.13
.005	0.13	.025	0.64	.077	1.96	.109	2.77	.240	6.10
.0075	0.19	.030	0.76	.078	1.98	.112	2.84	.290	7.37
.008	0.20	.040	1.02	.079	2.01	.1220	3.10	.310	7.87
.0085	0.22	.048	1.22	.081	2.06	.135	3.43	.370	9.40
.009	0.23	.050	1.27	.083	2.11	.142	3.61	.440	11.18
.010	0.25	.051	1.30	.085	2.16	.150	3.81	.480	12.19
.012	0.30	.053	1.35	.0870	2.21	.151	3.84	.505	12.83
.0135	0.34	.054	1.37	.0960	2.44	.153	3.89	.580	14.73
.0145	0.37	.060	1.52	.097	2.46	.158	4.01	.700	17.78
.015	0.38	.063	1.60	.098	2.49	.160	4.06	.760	19.30
.016	0.41	.0650	1.65	.099	2.51	.1770	4.50	.900	22.86
						.180	4.57	4.500	114.30

APPROVED

REVISED (B) ENTIRE STANDARD REVISED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material: Acetal Co-polymer.
4. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
5. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
6. Tips must be capable of being separated from center section.
7. Each tool shall be permanently marked with the assembly part number. Vendor markings are permissible. Insertion tip to be color indicated in the color chart; removal tip to be white.
8. Design for slot optional. Slot design must allow easy entry of all applicable wire sizes.
9. Circumferential dimension. Part requirement: tip of tool must be capable of accepting a pin of "A" max diameter after being inserted into a "R" diameter hole.
10. Circumferential dimension. Part requirement: tip of tool must be capable of accepting a pin of "A" max diameter after being inserted in to a "C" diameter hole
11. "N" max slit is measured with tip of tool in "R" diameter hole.
12. "P" max slit is measured with tip of tool in "C" diameter hole.
13. Tips must be smooth and free from burns and sharp edges.
14. Tools are used to insert and remove contacts from connectors conforming to the following. Wire acceptance ranges are given for information only.

Applicable Military Specification	Contact size	Wire size (OD)
MIL-C-005015 (NAVY)	16	.053 - .103
MS-3450's	12	.085 - .158
MIL-C-24308	22D	.054 max
MIL-C-0026482 (NAVY)	20	.040 - .083
Series 2	16	.053 - .103
	12	.099 - .158
MIL-C-38999	22D	.030 - .060
	20	.040 - .083
	16	.065 - .109
	12	.097 - .142
MIL-STD-1549 Components		
using MIL-C-39029/22 contacts	22	.030 - .060
	20	.040 - .083
	16	.065 - .109
	12	.097 - .142
MIL-C-0081511 (NAVY)	22	.030 - .054
MIL-C-81703 (NAVY)	20	.040 - .083
Series 2	16	.053 - .103
	12	.099 - .158
MIL-C-83723	20	.040 - .083
	16	.053 - .103
	12	.097 - .158
MIL-C-83733 (USAF)	22D	.030 - .060
	20	.040 - .083
	16	.063 - .103
	12	.081 - .158

15. D diameter represents tool tip I.D. in free state.

APPROVED 6 FEB 74
REVISED (8) ENTIRE STANDARD REVISED.

User activities: Army - Navy - Air Force -
Review activities: Army - AR Navy - EC Air Force - 85

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AF-85	International interest:	TITLE	MILITARY STANDARD
Other Cust Army - ER Navy - AS		TOOL, CONTACT INSERTION-EXTRACTION, ELECTRICAL CONNECTOR	MS27534
Procurement Specification		SUPERSEDES:	PAGE 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:43Z
Check the source to verify that this is the current version before use.