



FED. SUP CLASS
2320

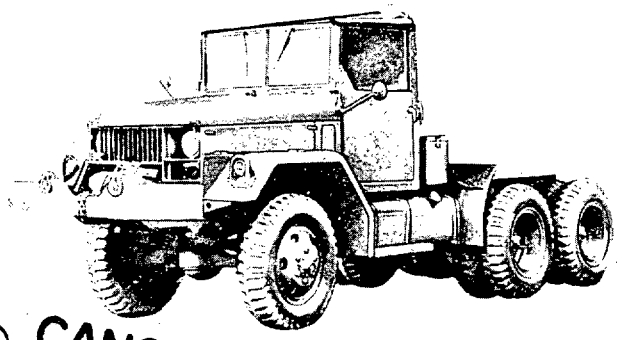

(B) CANCELLED AFTER 5 JUNE 85
NO SUPERSEDING STANDARD.

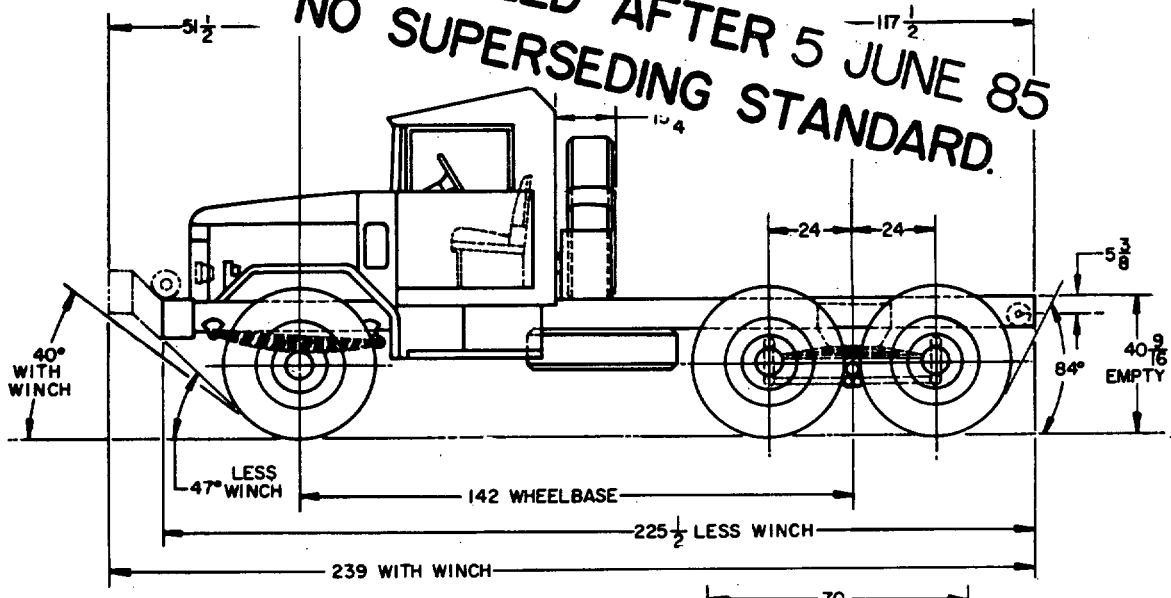

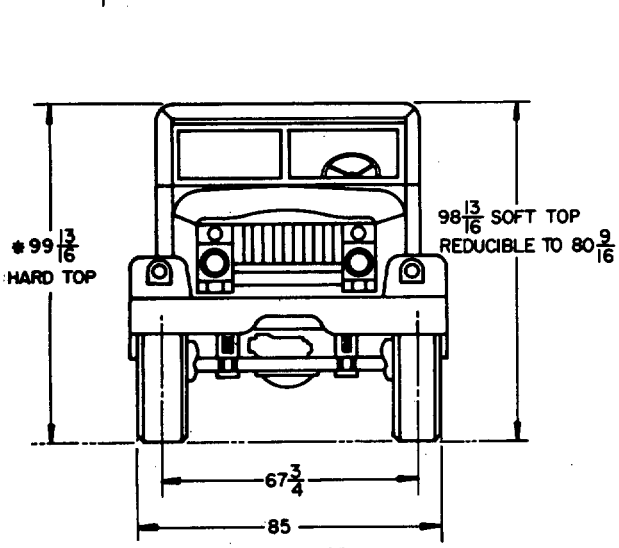

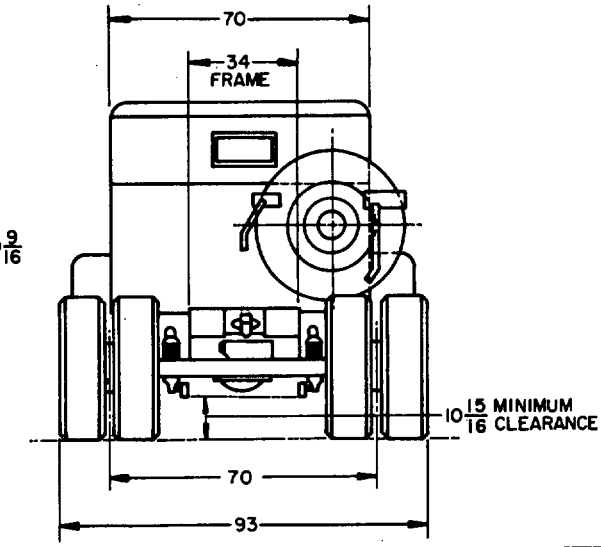

DIMENSIONS ARE IN INCHES AND ARE
SHOWN FOR ENGINEERING REFERENCE ONLY.

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENG. PARTS LIST	
MS 51394-1	8358836	WITH WINCH
MS 51394-2	8736260	LESS WINCH

REVIEW ACTIVITIES: ARMY-SM; AF-85

USER ACTIVITIES: ARMY-EL

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 15 SEPTEMBER 1961 REVISED (A) 29 OCTOBER 1965 (B) 5 June 1985

P.A. MO (ATAC) Other Cust NAVY-YD AF-84	TITLE CHASSIS, TRUCK, MILITARY DESIGN, M58, 2-1/2 TON, 6X6, 142 INCH WHEELBASE	MILITARY STANDARD MS 51394
PROCUREMENT SPECIFICATION MIL-T-45362	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: CHASSIS AND CAB, LESS PAYLOAD AND PERSONNEL.

	W/O W	W/W
FRONT AXLE	5236	5738
BOGIE	5206	5113
TOTAL	10442	10851 LBS.

GROSS LOAD:

	W/O W	W/W
PAYLOAD		
CROSS COUNTRY	7600	7200
HIGHWAY	13400	13000 LBS.

TOWED LOAD MAX:
CROSS COUNTRY 6000
HIGHWAY 10000 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

POWER PLANT: INST'N. 10871527

ENGINE: 8757517
MODEL: OA 331
NO. OF CYL: SIX IN LINE
DISPLACEMENT 331, BORE 4-1/8, STROKE 4-1/8.
COMP. RATIO: 6.73:1
GOV. SPEED: 3400 RPM
MAX. BHP: 146, NET 127 @RPM 3400
MAX. TORQUE LB. FT: 270, NET 248 @RPM 1400

TRANSMISSION ASSY: P/N 7520995
TYPE: SYNCHROMESH
FORWARD SPEEDS: (5) REVERSE (1)
GEAR RATIO: HIGH 1.00:1 7.36:1
FOURTH 1.45:1
LOW 7.55:1

TRANSFER TRANSMISSION: INST'N. 8757844
GEAR RATIO: HIGH 1.00:1
LOW 1.98:1

FRONT SUSPENSION: INST'N. 8757839

FRONT AXLE	7521734
FRONT SPRINGS	(2) 7368628
SHOCK ABSORBERS	(2) 7539007

REAR SUSPENSION: INST'N. 8757725

REAR AXLE	(2) 7368511
REAR SPRINGS	(2) 7521792
TORQUE ROD ASSY.	(6) 8757685

FRAME ASSY: 8345135
SIDE RAIL: 8 x 3 x 5/16
SECTION MODULUS: 9.54 IN^3

TIE DOWNS: NO. (8) 7373215
LOCATION: (4) EACH SIDE

WHEELS: (10) MS 53044-5
SIZE: 7.5 x 20, OFFSET 6-3/16

TIRES: (10) PLUS (1) SPARE, MS 35388-16
SIZE: 9.00 x 20, (8) PLY, NDCC

TUBES: MS 35392-13

CAB ASSY: SOFT TOP 8757744

ELECTRICAL SYSTEM:
POTENTIAL: 24 VOLT
BATTERIES: (2), (12) VOLT, (6TN), MS 35000

STARTING MOTOR:	7762618
GENERATOR 25 AMP	7355736
COIL:	7762685
REGULATOR:	MS 51356-1
B.O. DRIVING LAMP	MS 51318
B.O. MARKER LAMP	MS 53047
STOPLIGHT, TAIL	MS 51329-1
STOPLIGHT, B.O.	MS 51302-1

REFLECTORS:
(4) RED MS 35387-1
(2) AMBER MS 35387-2

BRAKE: SERVICE
HUB & DRUM ASSYS.
FRONT, LH 7529053 RH 7529054
REAR, LH 8757681 RH 8757682
DRUM, SIZE, FRT. 15 x 3, REAR 15 x 3
BRAKE, PARKING, SIZE: 14 x 3
ACTUATION: AIR/HYDRAULIC

WINCH: INST'N. 10871532
WINCH: MS 51352-1
20000 LB. CAPACITY

PINTLE: INST'N. 7722050
PINTLE: MS 51118-1
40000 LB. CAPACITY

PERFORMANCE: LOADED
CRUISING RANGE, HIGHWAY, 300 MILES
MAX. SPEED, HIGHWAY, 58 MPH

FORDING KIT: P/N 5701839
FORDING DEPTH WO/KIT 40 IN.
FORDING DEPTH W/KIT 72 IN.

MISCELLANEOUS EQUIPMENT:
33 IN. 5TH WHEEL, MS 53033-1, DWG. 7367608
CLOSURE, HARDTOP, 7354276

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U. S. ARMY TANK-AUTOMOTIVE CENTER
ATTN: STANDARDIZATION BRANCH
WARREN, MICHIGAN 48090.

(B) CANCELLED AFTER 5 JUNE 85
NO SUPERSEDING STANDARD.

APPROVED 15 SEPTEMBER 1961 REVISED (A) 29 OCTOBER 1965 (B) 5 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. MO (ATAC) Other Cust NAVY—YD AF—84	TITLE CHASSIS, TRUCK, MILITARY DESIGN, M 58, 2-1/2 TON, 6X6, 142 INCH WHEELBASE	MILITARY STANDARD MS 51394
PROCUREMENT SPECIFICATION MIL-T-45362	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.