
FED. SUP CLASS
2320

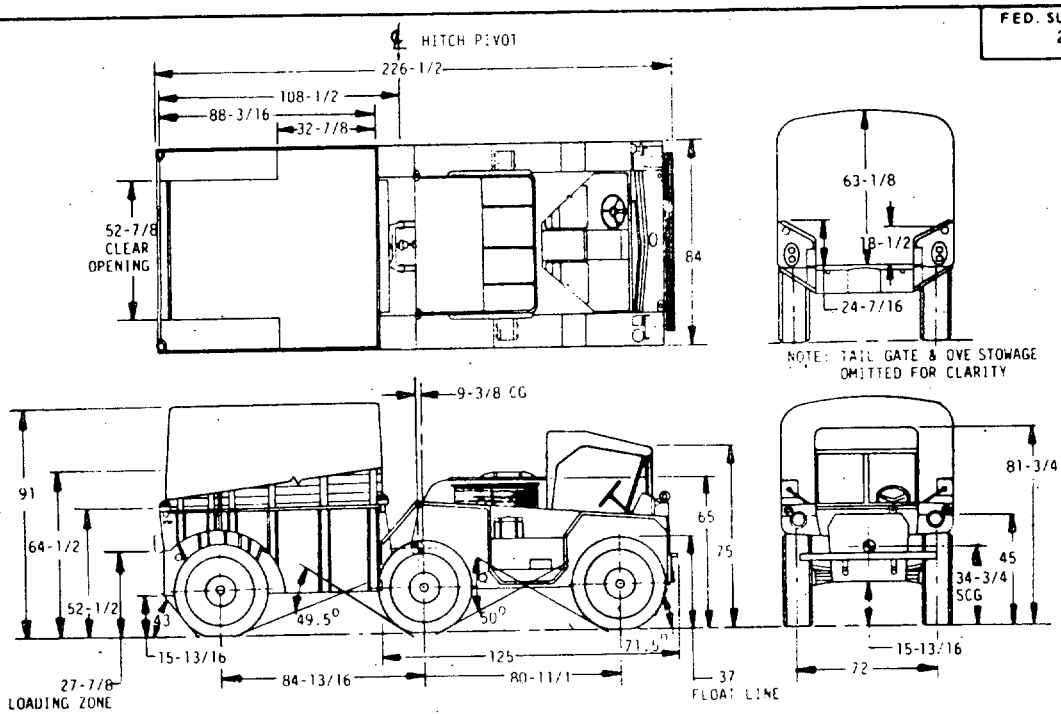

VEHICLE CHARACTERISTICS

CURB WEIGHT: (FULLY EQUIPPED)

	W/WN	W/O WN
FRONT AXLE(S)	2820 LBS	2620 LBS
INTERMEDIATE AXLE(S)	3125 LBS	3125 LBS
REAR AXLE(S) OR BOGIE	1700 LBS	1700 LBS
TOTAL	7645 LBS	7445 LBS

PAYLOAD: 2900 LBS

WEIGHT ALLOWANCE, 2 MAN CREW: 400 LBS

GROSS VEHICLE WEIGHT: LOADED

FRONT AXLE(S)	2960 LBS	2745 LBS
INTERMEDIATE AXLE	4045 LBS	3900 LBS
REAR AXLE	3540 LBS	3555 LBS
TOTAL	10545 LBS	10200 LBS

EIGHT (8) FULLY EQUIPPED TROOPS IN CARRIER 1600 LBS

TOWED LOAD ALLOWANCE:
LOADED 6000 LBS

CENTER OF GRAVITY: (AT CURB WEIGHT) 95-5/8 FORWARD, 13-11/16 ABOVE REAR AXLE CENTER LINE

	W/WN	WO/WN
LENGTH:	233-1/2	226-1/2
WIDTH:	83-13/16	NOT REDUCIBLE

HEIGHT EMPTY: (TOP OF CARRIER CANOPY) 90-7/8 REDUCIBLE TO 65

HEIGHT LOADED: (TOP OF CARRIER CANOPY) 92 REDUCIBLE TO 62-7/8

SHIPPING DIMENSIONS: 1034 CU. FT. REDUCIBLE TO 732-5/16 CU FT.

WHEELBASE: FRONT TO INTERMEDIATE: 80-11/16 INTERMEDIATE TO REAR 84-7/8

TREAD: FRONT 72 INTERMEDIATE: 72 REAR:72

BILGE PUMP NO. 8763300
FREE FLOW 54 GPM

ENGINE: MODEL DIESEL 3-53, NO OF CYLINDERS 3
TYPE: LIQUID COOLED VERTICAL IN-LINE 2 CYCLE,
DISPLACEMENT 159-1/8 CU IN.
BORE & STROKE 3-7/8 x 4-1/2 COMP. RATIO 21:1
FUELS DIESEL-VV-F800, MIL-F-4512A
MIL-F-46005-JET CIE, LUBE CAP. 9 QTS.
FUEL TANK CAPACITY 40 GALS., ENGINE GOV.
SPEED FULL LOAD 2800 RPM
MAXIMUM REFUELING RATE 35 GPM
HORSEPOWER: MAX GROSS 103 @ 2800 RPM, MAX NET 91 @ FIRING ORDER 1-3-2 2800 RPM
CONDITIONS: USING CITE FUEL
TORQUE: MAX GROSS 217 LBS FT. @ 1500 RPM, MAX NET 210 LBS, FT. @ 1500 RPM BSFS, MIN .425 @ 1900 RPM BMEP 102 PSI
COOLING SYSTEM CAPACITY FILL CAP 7 PSI 15 QTS, FAN CAPACITY 7500 CFM
IGNITION SYSTEM COMPRESSION IGNITION
FUEL SYSTEM INJECTION
AIR CLEANER 11601345

CLUTCH: 10945149
TYPE SINGLE DISC DIA. 11, EFFECTIVE AREA 60 SQ. IN.

TRANSMISSION: TYPE MANUAL SYNCHROMESH (EXCEPT FIRST & REVERSE) NO. OF SPEEDS: 4 FORWARD 1 REVERSE RATIOS: 7.06:1, 3.58:1 1.71:1, 1.00:1, REV 6.78:1 INPUT RATING: TO TORQUE 281 LB FT. PTO PROVISIONS YES BUT NOT USED, LUBE CAP 5-1/2 QTS.

BODY: TYPE UNITIZED, MATERIAL ALUM ALLOY, CONSTRUCTION WELDED INSIDE DIMENSIONS 84-3/4 x 74-1/2 CARGO FLOOR AREA 6227 SQ IN

TRANSFER: TYPE MANUAL
NO. OF SPEEDS: 2 RATIOS 1.79, 1.00:1
TORQUE RATING 2500 LB FT
PTO PROVISIONS YES, FOR WINCH KIT LUBE CAP. 4-1/2 QTS. CONTROL OF FRONT AXLE YES

FRAME: TYPE UNITIZED, MATERIAL ALUM ALLOY

APPROVED 8 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO.
MS 52167 -1	8736407

P.A. ARMY-AT Other Cust	TITLE TRUCK CARGO 1-1/4 TON 6x6 M561	MILITARY STANDARD MS52167(AT)
PROCUREMENT SPECIFICATION MIL-T-62047	SUPERSEDES	SHEET 1 OF 2

DD FORM SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

CAB: TYPE OPEN SOFT TOP
MATERIALS NYLON CREW CAPACITY 2

SUSPENSION, FRONT: & REAR: TYPE INDEPENDENT TRANSVERSE SHORT & LONG ARM (PARALLEL)
SPRING TYPE & SIZE, COIL - 14-5/8 X 5-1/2 DIA.
SPRING RATE 900 LB /IN WHEEL RATE 380 LB/IN
WHEEL TRAVEL 4 GVW, SHOCKS 1-3/8 DIA PISTON

TIRES: TYPE & DESIGN, SHREADED WIRE TUBELESS
MDCC 11601537
SIZE & PLY RATING 11:00 X 18, 6 PLY + 2
BREAKERS DIAMETER 41 IN.
SECTION WIDTH MAX 12 LOADED RADIUS 18-3/4
MAX. LOAD RATING 3150 LBS @ INFLATION
[illegible] PSI, NO SPARE OR OPTIONAL SIZES
NOMINAL LOAD AREA (7/26 X SECTION X DIA)
(14.3% SINK. & 90% THREAD) 222 SQ IN.

ELECTRICAL SYSTEM: TYPE MILITARY STANDARD
POTENTIAL 24 VOLTS
RADIO SUPPRESSED; SPECIFICATION MIL-T-10379
WATERPROOF YES FUNGUSPROOF YES
STARTER; RATING 5 HP MAX OUTPUT 1113116
CURRENT DRAW 160 AMP @ + 30°F - 470 AMPS @ -25°F ALTERNATOR; TYPE AIR-COOLED DRIVE DUAL V BELT DRIVE RATING 60 AMP 10929868
REGULATOR; TYPE INTEGRAL WITH ALTERNATOR
LIGHTING; COMPLIANCE WITH ICC REQUIREMENTS
CLASS "A" WIRING DIAGRAM 1594465

AIR TRANSPORTABLE: PHASE I AIR DROPPABLE:
YES C- AIRCRAFT - CH47A CHINOOK HELICOPTER

CRUISING RANGE: APG LOADED 340 MILES

LIFTING (SLINGING) PROVISIONS: 4 OUTBOARD CORNERS OF BODY

PERFORMANCE: LOADED
MIN. SPEED: 8 MPH IN 1ST L.T. GEAR @ 530 ENGINE RPM
MAX. SPEED: 58-1/2 MPH IN 4TH H.T. GEAR @ 2,800 ENGINE RPM
MAX. GRADE. 60 % @ 4-1/4 MPH IN 1ST L.T. GEAR @ 10,345 LBS GVW
MAX. GRADE: 10 % @ 30 MPH IN 1ST L.T. GEAR 10,345 LBS GVW
MAX. DRAWBAR PULL: 8700 LBS @ MPH @ 10,345 LBS GVW
MAX. STEADY SIDE SLOPE OPERATION: 40% (30% W/S250 SHELTER)

FLOATABILITY: FREEBOARD 8 IN WATER SPEED 2-1/2 MPH

BATTLEFIELD DAY FUEL ECONOMY: 304 MILES @ 7-5/8 MPG AVG. @ 23-1/4 HRS.

MIN. GROUND CLEARANCE: REAR AXLE, 15 FRONT AXLE 15 MIDSHIP 15

ANGLE OF APPROACH: CURB WEIGHT 68° W/W 66° W/O

ANGLE OF DEPARTURE: 43° RAMP BREAK ANGLE 43° 43°

PINTLE HEIGHT: EMPTY 23 LOADED 19-1/2

BODY LOADING HEIGHT: EMPTY 30-13/16 LOADED 27-7/8

BRIDGE CLASSIFICATION: 3E-40-4H (REF ARMY FIELD MANUAL FM5-36)

MIN. TURNING DIA: (WALL TO WALL)
LEFT 57-7/8 FT
RIGHT 57-1/4

ARTICULATION: PITCH ± 40°, CARRIER ROLL ± 30°, CENTER AXLE ROLL ± 15°

SUSPENSION INTERMEDIATE: TYPE SWING AXLE
SPRING TYPE & SIZE, SINGLE LEAF - 11 X 9/16
SPRING RATE 900 LB/IN . WHEEL RATE 380 LB/IN
WHEEL TRAVEL 4 GVW, SHOCKS 1-3/8 DIA PISTON

WHEELS: TYPE STEEL 11640253
SIZE 8.00 X 18 IN RIM
9/16 IN. BOLT, 8 HOLE CIRCLE, 15 IN. DIA

GROUND PRESSURES: FRONT 6.2 PSI
INTERMEDIATE 9.1 PSI REAR 8 PSI

STEERING:
TYPE MECHANICAL, FRONT & REAR RATIOS 24:1

BRAKES: SERVICE
TYPE SEALED, EXTERNAL HUB AIR PRESSURIZED
5 PSI 54.4 SQ IN SIZE 12 X 2 IN
EFFECTIVE AREA (EA.) 54.4 IN ACTUATION HYD.
MASTER CYLINDER - DUAL SYSTEM 1-1/2" X 7/8
DIA AND 1-3/4" X 1" DIA 1640267 1640268
WHEEL CYLINDER - DUO - SERVO 3/4 BORE.

BATTERIES: TWO - TYPE 6 TN IN SERIES

WINCH:
CAPACITY 8000 LBS. 1ST LAYER, 7500 LBS BARE DRUM 7500
CABLE DIA. 7/16 IN LENGTH 150 FT.
CABLE SPEED: 15 FT. PER MINUTE

PINTLE: CAPACITY 18,000 LBS MS51335-1

TIE DOWNS: 8. @ 4700 # BREAKING STRENGTH EACH

KIT PROVISIONS: KIT, MORTAR, 81MM, M29 STOWAGE)- KIT, MORTAR, 4-3/4 M30 (STOWAGE) - KIT, MACHINE GUN, 7.62MM, M60 - KIT, RADIO, MOUNT AND ANTENNA - KIT, POWER SOURCE, 100 AMP - KIT, RECEPTACLE, SLAVE - KIT, -50° ARCTIC - KIT, WINTERIZATION, -26°F - KIT, WINCH, FRONT MOUNTED - ELECTRONIC SHELTER, 8250

FULL LOAD: 6-5/8 MGP @ 40 MPH @ 10,345 LBS GVW

ROAD LOAD: 16 MPG @ 15 MPH MAX. 14 MPG @ 35 MPH@ 10,345 LBS GVW

APG: LOADED 5-1/2 MPG @ 5-36 MPH 10,345 LBS

MAX. ACCELERATION: 0-30 MPH IN 13 SEC., 0-5 MPH 42 SEC.

MAX. FUEL ECONOMY: TYPE OF FUEL, CITE

AXLE(S) FRONT: SPIRAL BEVEL
TYPE INDEPENDENT SUSPENSION SWING;
RATIO 5.57:1
DIFFERENTIAL LIMITED SLIP; LUBE CAPACITY 4 PTS

AXLE LOAD RATING: LOADED 2500 LBS

AXLE(S), INTERMEDIATE:
TYPE ROLLING DIFFERENTIAL W/SWING AXLE
RATIO 5.57 :1
DIFFERENTIAL LIMITED SLIP, LUBE CAPACITY 12 PTS

AXLE LOAD RATING: LOADED 3300 LBS

AXLES, REAR: TYPE INDEPENDENT SUSPENSION SWING
RATIO 5.57:1 DIFFERENTIAL LIMITED SLIP;
LUBE CAPACITY 4 PTS

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 8 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO.
MS 52167 -1	8736407

P.A. ARMY-AT Other Cust	TITLE TRUCK CARGO 1-1/4 TON 6x6 M561	MILITARY STANDARD MS52167(AT)
PROCUREMENT SPECIFICATION MIL-T-62047	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.