MIL-F-81526B(@
2 April 1971

SUPERSEDING
MIL- F-81526A(AS)
20 August 1969

MILITARY SPECIFICATION
FILM-TAPES, SEMIAUTOMATIC TEST

This Specification has been approved by the Naval Air Systems Command, Department of the Navy

1. SCOPE

1.1 Scope - The Film-Tapes covered by this specification shall be for use in the Selector-Test Programmers SA- 1447 D/APG-59 (Built-in Test (BIT) Programmer) and the Test Set, Missile Control System TS 2511 C/AWG- 10* (FIM) for programmed semiautomatic testing (composite) of Missile Control System (MGS) AN/AWG-l O.

1.2 Classification - The Film-Tapes shall be classified as Production Copies. The Film- Tapes themselves are not identified as to classification.

2. APPLICABLE DOCUMENTS

2.1 General - The following documents of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-T-60B	Tape, Pressure Sensitive
PPP-C-843	Cushioning, Material, Cellulosic

STANDARDS

Military

MIL-STD-105	Sampling procedures and Tables for Inspection by Attributes
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of

*Pending Navy Approval

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

MIL-STD-794(WP) "	Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-81O	Environmental Test Methods

Federal

Federal Standard 170	Film, Photographic, Black and White, Classification and Test Methods
Federal Standard 406	Plastics: Methods of Testing

Westinghouse Electric Corporation (97942)

DRAWINGS

511R736	spool
578R309	Film Leader, Photographic, Processed
580R479	Film, photographics processed Semi-utomatic, Built -in Test
580R597	Film, Photographic, Processed, Semi-automatic, Test, Fault Isolation Meter
617R030	spool

OTHER DOCUMENTS

Westinghouse Electric Corporation (97942)

9RA1796	Methylchoros ilane Treatment

I

2. 1.1 Availability of Documents - Copies of specification, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

3. REQUIREMENTS

3.1 Materials and Processes - In the selection of materials and processes, optimum quality is of prime consideration. Specifications and standards for materials and processes which are necessary for the Film-Tape to meet this specification and which are not specifically designated herein shall be selected in accordance with MIL-STD - 143.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

3. 1.1 Materials - Materials required under this specification include photographic film, a Film-Tape spool and a Film-Tape container. The Film-Tape mate rial shall be Eastman Kodak (19139) Kodalith Ortho film, Type 3, Estar Thin base, Code 3556, Spec 997 or equivalent.

3. 1.2 Processes - To minimize variations in the properties of the Film-Tapes, processing should be automated to the maximum extent feasible. Any development chemistry is permissible if, as a result, the Film-Tapes have the properties specified herein. Processed film shall be treated for moisture and fungus resistance in accordance with Westinghouse document 9RA1796. I

3.2 Design and Processing - The Film-Tapes shall be designed to withstand strains, jarring, vibrations, and other conditions incident to shipping, storage , installation and service, The Film-Tapes shall be designed to function satisfactorily uncle r the operating conditions, temperatures, relative humidity, and length of life as specified in the following paragraphs.

3. 2.1 Operational Stability - The Film-Tape shall be capable of continuous cycling for 24 hours at a rate of 10 frames per second with no degradation of performance. (A cycle is defined as the continuous passage and return of a minimum of 900 frames through tape transport assembly as specified in 4. 8). I

3. 2.2 Operating Life - The Film- Tapes shall have a minimum total operating life of 1, 500 cycles as defined in 3.2. 1.

3. 2.3 Interchangeability - All Film- Tapes having the same identification shall be completely interchangeable.

3. 2.4 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests:

Temperature - Room ambient 30 ± 10" C (86 ± 18° F)

Altitude - Normal Ground

Vibration - None

Humidity - Room ambient up to 95 percent (%)) relative humidity (RH)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

3. 2.4.1 Temperature "Limits - The Film-Tape shall operate satisfactorily between the following ambient temperature limits to a maximum altitude of 50, 000 feet: -54 to 7i°C (-65. 2 to 160° F). The Film -Tapes shall withstand storage temperatures between -62 to 85° C (-79. 6 to 185°F) without any deleterious effects.

3. Z. 4.2 Relative Humidity Limits - The Film-Tapes shall operate satisfactorily with a maximum RH of 95%

3.2.5 Proprietary Names and Drawings - Whenever a proprietary name or drawing appears in this specification, it shall be understood to be a requirement by way of description rather than one of limitation. Equivalent products and processes of other manufacturers may be used at the option of the suppliers.

3.3 Performance

3.3.1 General - Unless otherwise specified, values establishing the requirements for satisfactory performance apply under both standard and extreme service conditions. When reduced performance under extreme conditions is acceptable, tolerances or values setting forth acceptable variations are specified.

3. 3.2 Function - The BIT and FIM Film-Tapes determine which relays in the MCS system, the BIT Programmer, and FIM respectively are to be actuated for any particular test. The Film-Tapes also contain messages which the operator is to observe, when required. The Film-Tapes, through a dot pattern, select which photosensitive transistors will be activated and thus select the test circuit relays. These relays in turn select the electrical signals to be monitored.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

3.4 Detail Requirements - The Film-Tapes shall meet the following detail requirements:

3.4. 1 Film-Tape Dimensions - The Film, 105mm, dimensions before **processing and treatment shall be as shown in Figure 1.**


a. The base thickness shall be O. 0025 ± O. 0002 and maximum thickness O. 0030.

b. The length of any 100 consecutive perforations shall be 18.700 ± 0.015 CL to CL.

c. The dimensions and tolerances shown in Figure 1 apply to the material immediately After cutting and perforating, and when the film is in equalibrum with a relative humidity of 50 percent at an ambient temperature of 22.2 ± 1. 6°C (72 ± 3°F)

3.4. 1.1 Film-Tape Thickness - The thickness of the Film-Tape with emulsion shall not exceed O. 0032 inch.

3.4. 1.2 Film-Tape Length - The length of the Film-Tape, including **leader and trailer ends, shall not exceed 75 feet for BIT, and 240 feet** for **FIM.**

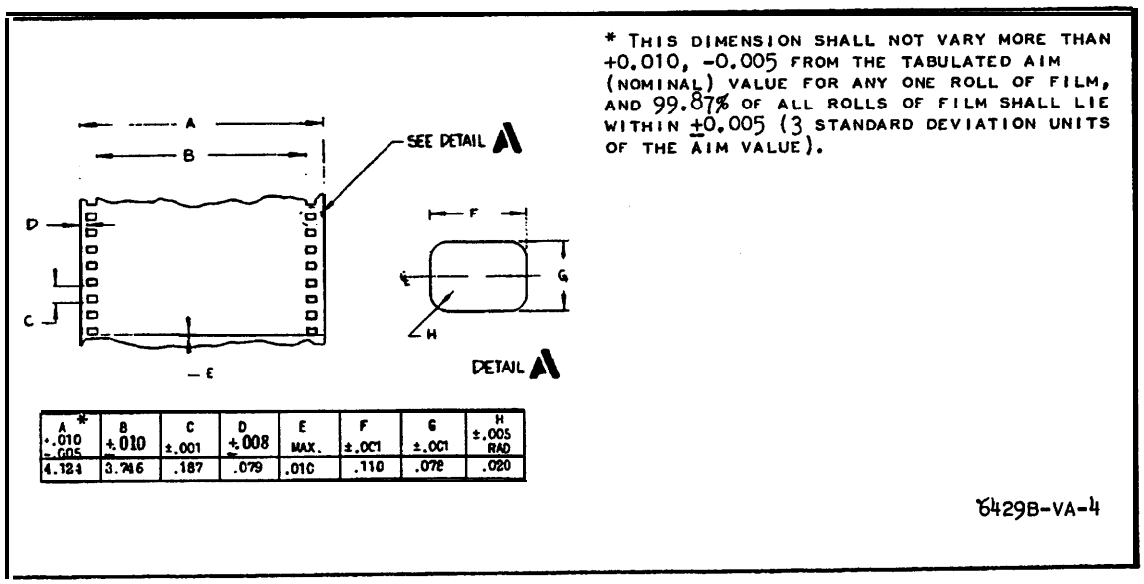

A * +.010 -.005	B ±.010	C ±.001	D ±.008	E MAX.	F ±.001	G ±.001	H ±.005 RAD
4.124	3.746	.187	.079	.010	.110	.078	.020

Figure 1. Film, Photographic, 105-mm Dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

3.4. 1.3 Dimensional Stability - The maximum permissible dimensional changes after processing and fungus and moisture treatment under various temperature and relative humidity ranges shall be as listed in Table 1.

TABLE 1

MAXIMUM PERMISSIBLE DIMENSIONAL CHANGES

Characteristic	Test Condition	Max. Change
Humidity Coefficient of Expansion (Unprocessed)	Between 15 % RH and 50% RH at 21. l°C (70" F)	O. 00035 Yo/lyo RH
Thermal Coefficient of Expansion	20% RH between 21. 1°C (70° F) and 120°F' (48. 9°G)	o. 00015%
Processing Dimensional Change	a. Preconditioned to low humidity prior to conditioning at 50% RH	-0.0270
	b. Unprocessed film precondi-tioned to low humidity and processed film to high humidity prior to conditioning at 50% RH	-0. 05%
	c. Unprocessed and processed film preconditioned to high humidity prior to conditioning at 10% RH	*o, 0370
Processing and Accelerated Aging Shrinkage	7 days at 20% RH and 48. 9°C	$0_{0}07$

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

3. 4.2 Tensile Strength - The Film - Tape shall have a tensile strength of at least 17, 000 pounds per square inch in the lengthwise direction when tested in accordance with Federal Standard 406, Method 1013.

3. 4.3 Brittleness - When tested in accordance with Federal Standard 170, Method C (vice), the average spacing of the parallel planes for the first failure shall not be greater than O. 15 inch for either dimension of the Film-Tape.

3. 4.4 Base Light Transmission - The minimum base light transmission of transparent areas of production copy film tapes shall be 60 percent, as determined by the method specified in paragraph 4.3.2.1.

3. 4.5 Total Density - Total density, defined as the sum of the silver deposit density and the base density, shall be 4.20 or more for the Film-Tape, as mess ured on a standard densitometer.

3. 4.6 Splices - No splices shall be permitted in the Production Copy Film-Tapes.

3. 4.7 BIT Programmer Film-Tapes - The format and content on the Film-Tape shall conform to the appropriate Master Film specified in Westinghouse drawing 580R479. See Figure 2 for typical frame layout.

3. 4.8 FIM Film-Tapes - The format and content on the Film-Tape shall conform to the appropriate Master Film specified in Westinghouse drawing 580R597. See Figure 3 for typical frame layout.

3. 4.9 Identification and Markings - Each Film-Tape, Film- Tape container, and packing carton shall be identified by the manufacturer's part numbers name, and registered trade mark or federal supply code (NAVAIR code numbers) as shown in Figure 4.

3. 4.9.1 Code Number - A publications code number shall appear in the title block of each Film-Tape. The code number shall be as specified by Naval Air Technical Services Facility (NATSF) and shall be accompanied by a date.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.


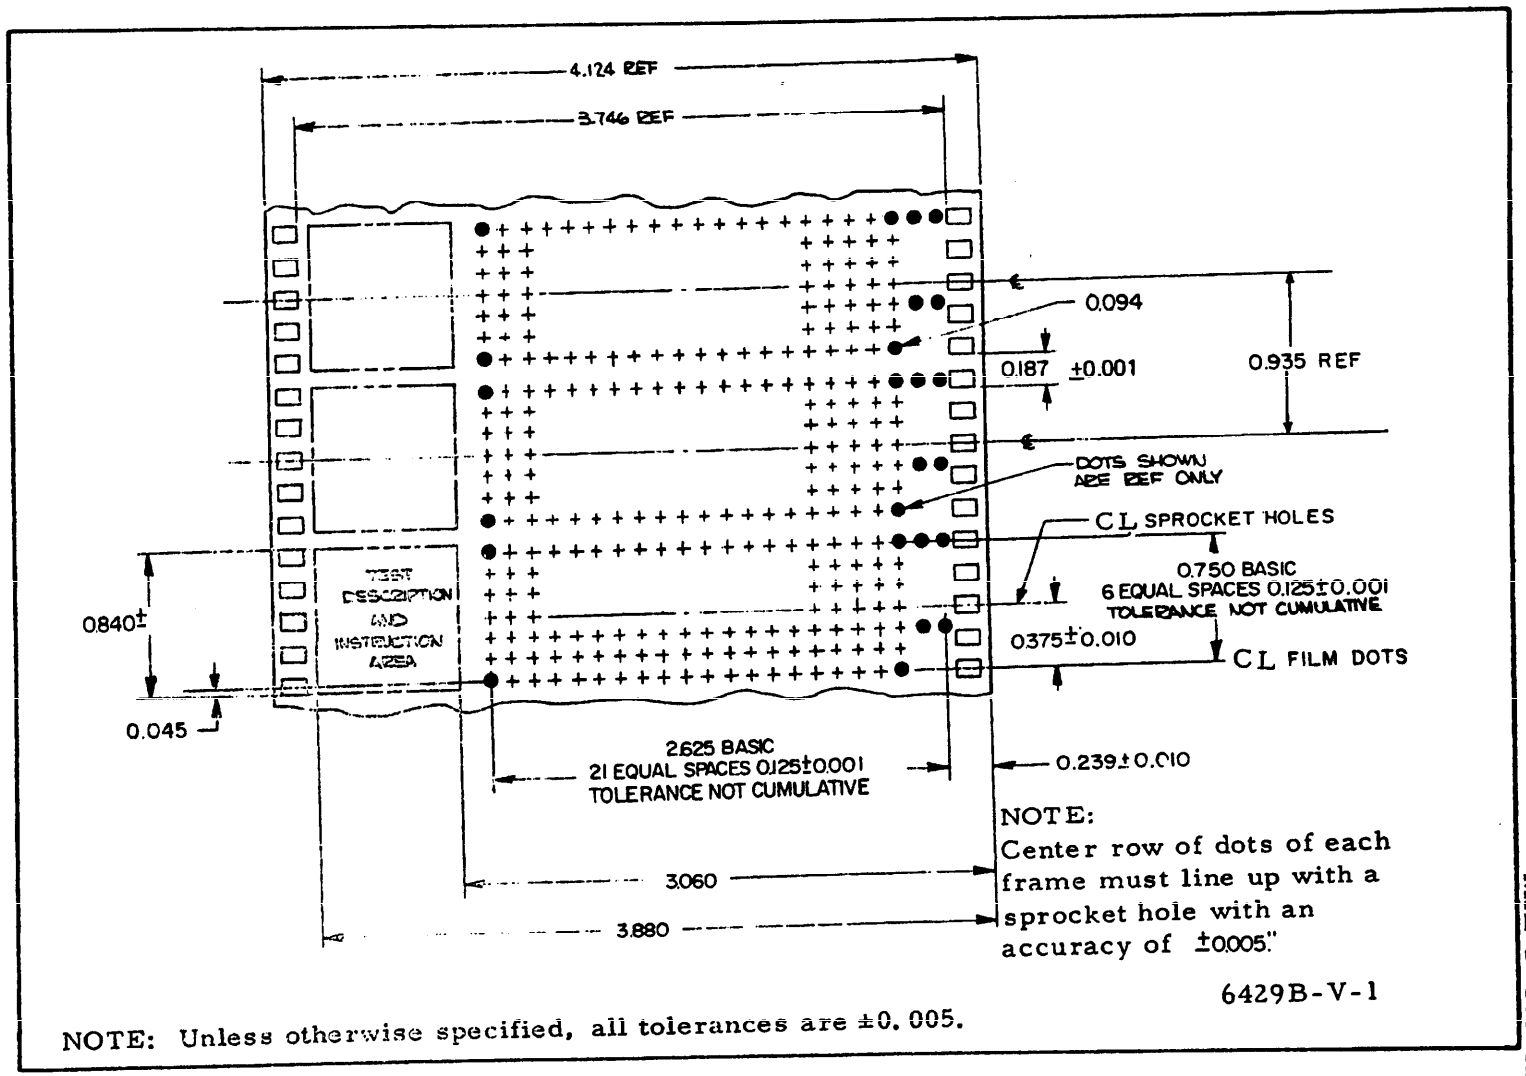


Figure 2. Selector - Test Programmer SA-1447D/APG-59, Dimensions and Frame Layout


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

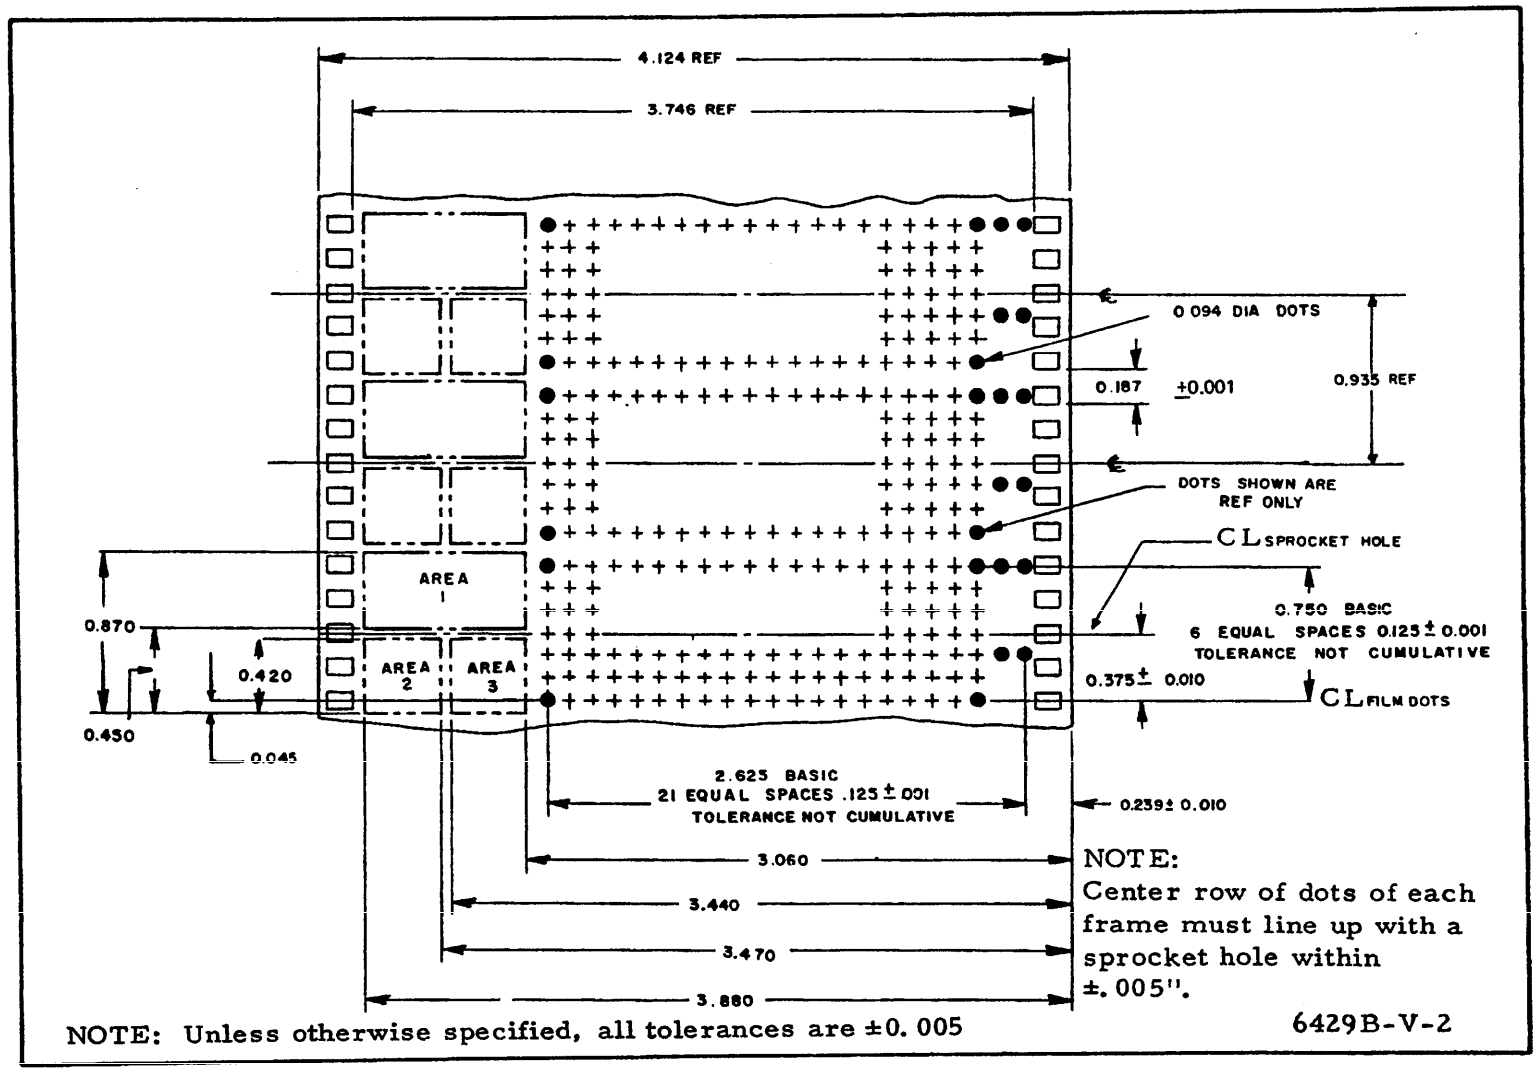


MIL-F-81526B(AS)

Figure 3. Missile Control System Test Set TS 2511 C/AWG-l O Dimensions and Frame Layout

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

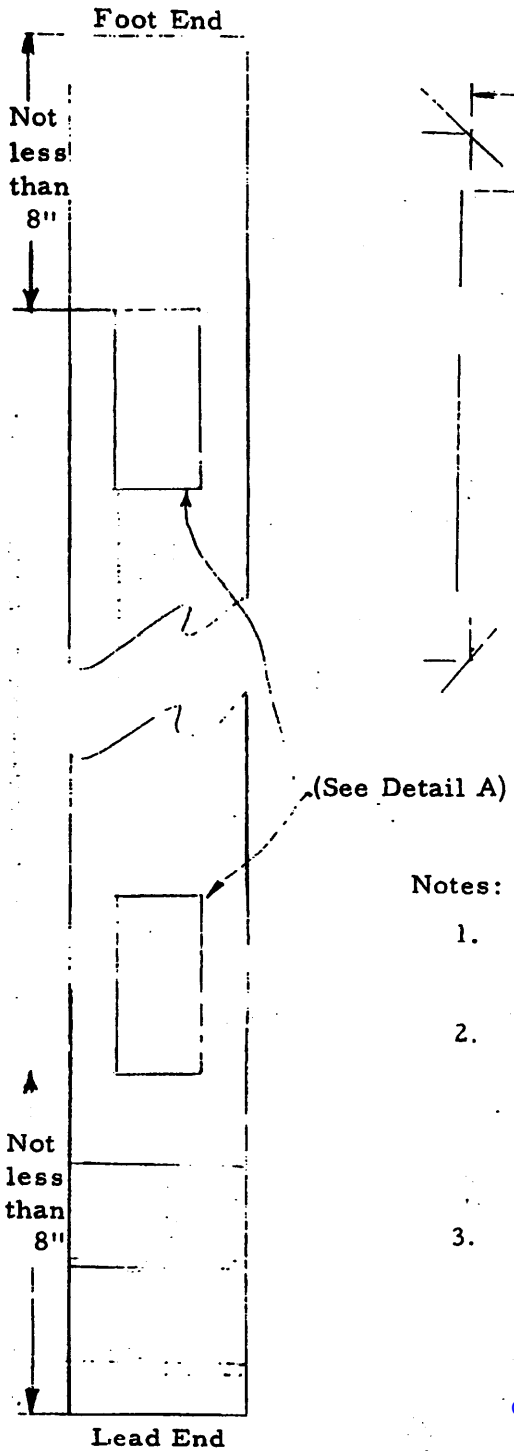

Title Block For BIT

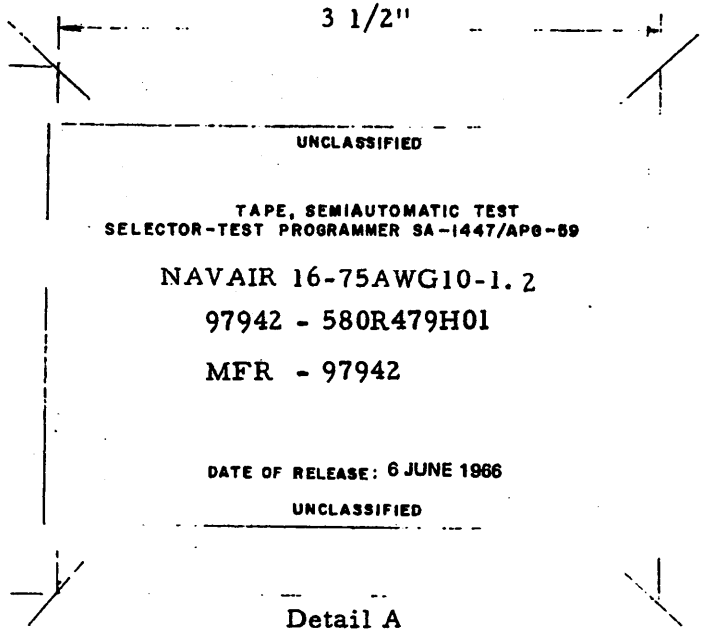

Detail A

Notes:

1. This title block must also appear on the tape container

2. Selector-Programmer tape title block illustrated. FIM tape title block will be identical, except FIM nomenclature will be used as follows:
   Test Set, Missile Control System
   TS 2511C/AWG-10

3. NAVAIR Code Numbers:
   BIT: NAVAIR 16-75AWG10-1.2
   FIM: NAVAIR 16-75 OQ-50-2.1
   Unit BIT: 3069T
   Unit FIM: 3070T
   Unit BIT-FIM Transport: 3071T
   (Dash number to increase 0.1 or 01 with each revision)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:18Z
Check the source to verify that this is the current version before use.

3. 4.9.2 Program Changes - P rog ram Changes shall be noted by a change in the publications Code Number.

3. 4.9.3 Film-Tape End Identification - The Film-Tape leader and trailer ends shall be as specified in Figure 4.

3. 4.9.4 Film Edge Markings - Unless specified to the contrary by the procuring acitivity, manufacturer's code designations will be permitted, provided the marking is confined to within 0. 079 inch of the film edge.

3.4.10 Tape Ends - The leader end of each Film-Tape shall have reference marks in accordance with Westinghouse drawing 578R309 to ensure proper registration when the Film-Tape is spliced to the tape transport leader (Figure 4).

3.4.11 Film-Tape Spools - Spool Part Number 617R03 O or equivalent shall be used for the BIT Programmer Film-Tapes. Spool Part Number 511R736 or equal shall be used for FIM Film-Tapes.

3.4, 12 Film-Tape Storage - The spooled film shall be enclosed in a commercial grade polyethylene bag and placed in a container as specified in paragraph 5.2 for storage when not in use.

3.4, 13 Film-Tape Winding - Production Copy Film -Tapes shall be wound as follows:

3. 4.13.1 Semiautomatic Built-In-Test Film-Tapes - These Film-Tapes, starting from the rear end, shall be wound on a Spool (3. 4. 11) with the message edge of the film on the slotted side of the Spool. The Film-Tape shall be wound in a counterclockwise direction around the Spool (viewed from the slotted end) such that the emulsion side of the Film-Tape is toward the Spool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

3. 4.13.2 Semiautomatic Test, Fault Isolation Meter - These Film-Tapes, starting at the rear end, shall be wound on a Spool with the message edge of the film on the slotted end of the Spool. The Film -Tape shall be wound in a clockwise direction around the Spool (viewed from the slotted end) such that the emulsion side of the Film-Tape is away from the spool.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Inspection records of the examination and tests shallbe kept complete and available to the Government.

4.2 classification of Inspection - The inspection of production-copy Film - Tapes shall be classified as follows:

a. Preproduction tests (4. 3)

b. Quality conformance tests (4.4)

4.3 Preproduction Tests - Preproduction tests shall be conducted on one Film -Tape representative of the Film-Tape to be supplied under the contract. Tests shall be conducted at the contractor 's plant under the responsibility of contractor and in accordance with the approved test procedures of 4.5. The contractor shall inform the procuring activity when tests are to be conducted so that a representative may be designated to witness and monitor the tests, when so desired. After completion of the tests conducted at the contractor Is plant, the procuring activity may request the shipment of the Film Tape tested to a Government facility for further testing. The data obtained by the contractor in performing tests shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

submitted to the procuring activity at the completion of all tests and prior to shipping the Film-Tape to the Government testing facility. Contractors not having adequate facilities to conduct all required tests shall obtain the services of a commercial testing laboratory satisfactory to the procuring activity.

4. 3.1 Accessory Material - When the procuring activity requires the shipment of the Film-Tape to a Government facility for tests, the contractor shall submit, in addition to the production copy Film-Tape, all extra materials and design and test data necessary to test and evaluate the equipment (see 4. 8). The design and test data supplied by the contractor shall indicate the physical characteristics of the Film-Tape and establish that the Film- Tape conforms to this specification.

4. 3.2 Scope of Tests - Preproduction test shall include all tests deemed necessary by the procuring activity to determine that the Film-Tape meets all the requirements of this specification and the contract. Preproduction tests shall include environmental tests specified herein in accordance with the procedures of MIL-STD- 810 to the limits specified herein and other tests specified herein. P reproduction tests shall also include the following:

4. 3.2.1 Base Light Density - Base light dens ity shall conform to paragraph 3. 4.4 of this specification when measured in accordance with the test setup of Figure 5 and the following. The light source shall be adjusted until the milliammeter reads 2 mA. Insert the Film-Tape at a distance of 0. 060 ± O. 010 inch from the lens of the sensor. The current shall not be less than 1.2 mA.

4. 3.2.2 Total Density - Total density shall conform to paragraph 3. 4.5 of this specification.

4. 3.2.3 Film-Tape Thickness - Film-Tape thickness shall conform to paragraph 3. 4.1.1 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

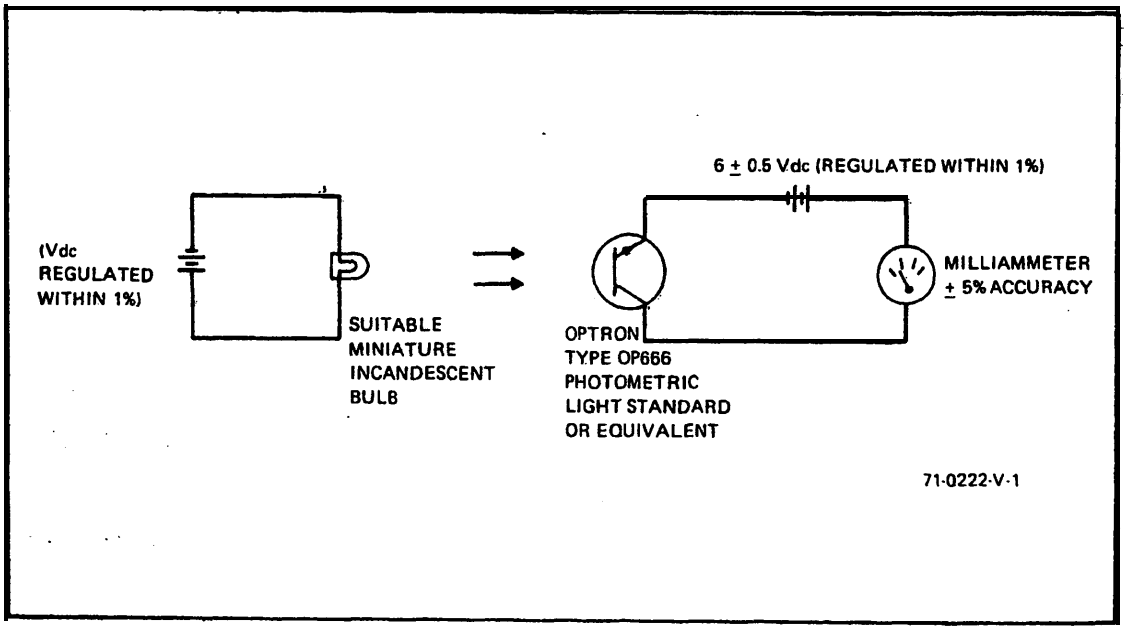


Figure 5. Light Dens ity Measurement

4, 3. 2.4 Dimensional Stability . Dim ens ional stability shall conform to paragraph 3. 4.1.3 of this specification.

4. 3.2.5 Environmental Tests - Environmental tests shall be limited to paragraph 3.2.2, 3.2.4.1, and 3. 2.4.2 and applicable portions of 4. 3.2.6 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

4. 3.2.6 Environmental Test Method - MIL-STD-810B Environmental Test Methods shall be used for Low Temperature, High Temperature, and Humidity tests as specified herein:

a. Standard Conditions - Standard conditions shall be as specified in paragraph 3.2.4 of this specification.

b. High Temperature - MIL-STD-810B, Method 501, Procedure I and 11.

(1) Accept/reject criteria shall be taken from paragraphs 3.4.1, 3, 3.4.2, 3.4.3, 3,4.4, and 3. 4.5 of this specification.

(2) Storage temperature shall be 85° C (185" F).

(3) Maximum operating temperature shall be 7 1'C (160° F).

(4) operating time shall not exceed 60 minutes.

c. Low Temperature - MIL-STD-810B, Method 502, procedure 1.

(1) Accept/reject criteria shall be taken from paragraphs 3.4.1.3, 3.4.2, 3.4.3, 3.4.4, and 3. 4.5 of this specification.

(2) Storage Temperature shall be O°C (32" F).

(3) The lowest storage temperature shall be -62°c (-79. 6°F).

(4) The lowest operating temperature shall be -54° C (-65. 2"F).

(5) Chamber air velocity shall be zero.

(6) Operating time shall not exceed 60 minutes.

d. Humidity - MIL-STD-810B, Method 507, procedure 1.

(1) Accept/reject criteria shall be taken from paragraphs 3.4.1.3, 3.4.2, 3.4.3, 3.4.4, and 3. 4.5 of this specification.

(2) Measurements shall be taken prior to and after the tests.

(3) The Film-Tape shall be exposed to +85° C (+185°F) in an atmosphere of no greater than 95% Relative Humidity for a period of no longer than 2 hours.

4.4 Quality Conformance Tests - Quality conformance tests shall consist of all tests deemed necessary to determine that the Film-Tapes submitted for acceptance under the contract are equivalent in performance and construction to the approved preproduction Film -Tape. Quality conformance tests shall consist of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

a. Individual Tests - Individual tests shall be conducted on each Film -Tape. Submitted for acceptance under the contract.

b. Sampling Tests - Film-Tapes submitted for sampling tests shall be selected by the contractor under the supervision of the Government inspector, shall be representative of current production, and Shall first have passed the individual tests. The quality of sample tests to be performed shall be as specified in the detail specification or the contract.

c, Sampling - The Film-Tape shall be examined by a sample selected from each lot in accordance with MIL-STD-105, inspection level II. Assurance quality level (AQL) as specified shall be determined in accordance with the following paragraph.

d. Classification of Defects - All dimensional characteristics shall be considered defective when out of tolerance. All physical properites shall be considered defective when outside the specified minimum, maximum, or range as applicable. The specified AQL for each category shall be applicable to the cumulative defects for that category found in sample. Table 2 lists possible defects, major and minor defect categories, arbitrary defect numbers, and methods of inspection.

TABLE 2

QUALITY ASSURANCE CHART

Category and Defect No.	Defect	Method of Inspection
Major	AQL 2.5 Percent	
101	Material (Film) not correct	Certification
102	Emulsion on wrong side	Visual
103	Base light transmission too low	4. 3.2.1
104	Total density of black area too low	4. 302.2
105	Dot pattern not within toler ante from film edge	Measure
106	Dot pattern not within tolerance from perforation centerline	Measure
107	Dot size not correct	Measure
108	Characters- or numerals outside area designated for instructions	Measure

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

TABLE 2 (Continued)

Category and Defect No.	Defect	Method of Inspection
Major	AQL 2.5 Percent	
109	Pinholes in black area	Visual
110	Film spliced	Visual
111	Workmanship defects	Visual
Minor	AQL 4.0 Percent	
201	Spool not correct	3.4.11
202	Winding not correct	3.4.13
203	Packaging not correct	MIL-STD-794

4.5 Test Procedures . The procedures and methods for conducting all tests specified herein shall be as stated in the detail Film-Tape specification, or if not stated therein, shall be prepared by the contractor and sent to the procuring activity for approval. In the latter case, the contractor shall have obtained approval from the procuring activity prior to submission of Film-Tape for tests. The right is reserved by the procuring activity to require additional tests to determine compliance with the requirements of this and the detail Film-Tape specification, when it is deemed necessary.

4.6 Presubmission Testing - No Film-Tape shall be submitted to the Government inspector by the contractor until it has been previously tested and inspected by the contractor and found to comply to the best of his knowledge and belief with all applicable requirements. With the consent of the contractor and at the discretion of the procuring activity, this prior test and inspection may be participated in or witnessed by the Government inspector with the object of eliminating the necessity of repeating such test and inspection after the Film -Tape has been formally submitted to the Government inspector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

4,7 Rejection and Retest - The Film-Tape which has been rejected may be reworked to correct the defects, and resubmitted for acceptance. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the inspector, Film-Tapes rejected after retest shall not be resubmitted without specific approval of the procuring activity.

4.8 **Auxiliary Equipment** - Auxiliary equipment required for verification of compliance to this. specification includes the following specific items or equal:

a. A tape transport assembly functionally equal to that of the Selector Test Programmer, SA- 1447 D/APG-59 capable of handling BIT and FIM Film-Tapes, and having an aperture plate over AISI 304 stainless steel, No. 4 standard polish, a maximum roughness of 3 RMS, and flat to 10/1000 concave referenced to the Film-Tape side of the plate.

b. Base Light Density Test Fixture - This device shall be as described in Figure 5 or equivalent, and shall be used in determining compliance with paragraph 3. 4.4 of this specification. I

4.9 Design Data and Material - The following design data and extra material shall be supplied with this preproduction Film-Tape for test:

4. 9.1 **Design Data** - Whenever it is available, the contractor shall furnish data prepared in the normal performance of the contract in lieu of the following data:

a. Three copies of a practical wiring diagram of each peculiar test assembly or of each constructional unit thereof, whichever is practicable, showing the physical location and connections of detail parts and subassemblies, with reference symbols and terminal numbers indicated.

b. Three copies of a complete cabling diagram of the complete peculiar test equipment.

c. Three copies of outline dimensional sketches of all production copy Film -Tapes specified in the contract purchase order and of any detail external parts, showing projections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

d. Prior to submission of the preproduction sample Film-Tape, three copies of a report by the contractor of his tests on the Film-Tape. Included with this shall be an analysis of all failures which occurred and suggestions for improvements which may be incorporated in later productions.

5. PREPARATION FOR DELIVERY

5.1 General - Unless otherwise specified in the contract or purchase order, the production copy Film -Tape preparation for deliver y shall conform to the requirements of this section.

5.2 Preservation and Packaging . Each processed Film-Tape shall be enclosed in a commercial grade polyethylene bag. The bag shall be double folded at the open end and stapled through the folds. The bagged Film-Tape shall be placed in a commercial grade tinned-steel slip-top can at least 4 inches in diameter and 5 1/2 inches deep and cushioned with cellulose material conforming to PPP - C- 8433 Type II, Class A. Pressure-sensitive adhesive tape in accordance with specification PPP-T-60B shall be used to seal the top of the can.

5.3 Packing - The package Film- Tapes shall be packed in accordance with MIL-STD-794, level C.

6. NOTES

6.1 Ordering Data - Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Selection of applicable levels of packaging and packing (see 5. 3).

6.2 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

a. Contract - The contract shall have precedence over any specifications

b. This Specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

c. Refe renced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

6.3 Notation of Revisions - A bar in the margin denotes a change made in that paragraph from the previous version of the document. This has been done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in those notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

6.4 Availability of Documents - When requesting specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Publications & Forms Center, code 1.5, 58.1 Tabor Avenue. Philadelphia, Pennsylvania 19120.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

	Page
1. SCOPE	1
1.1 Scope	1
1.2 Classification	1
24 APPLICABLE DOCUMENTS	1
2.1 General	I
2.1.1 Availability of Documents	2
30 REQUIREMENTS	2
3.1 Materials and Processes	2
3. 1.1 Materials	2
3. 1.2 Processes	3
3.2 Design and Processing	3
3. 21 Operational Stability	3
3.2.2 operating Life	3
3. 2. 3 Interchangeability	3
3.2.4 standard Conditions	3
3. 2. 4. 1 Temperature Limits	4
3. 2.4.2 RelatiVe Humidity Limits	4
3. 2. 5 Proprietary Names and Drawings	4
3. 3. Performance	4
3. 3.1 General	4
3. 3. 2 Function	4
3.4- Detail requirments	5
3.4.1 Film tape dimensions	5
3.4.1.1 Film-Tape Thickness	5
3.41. 2 Film Tape length	5
3.4.1.3 Dimensional Stability	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

Page

3. 4.2 Tensile Strength 7

3. 4.3 Brittleness 7

3.4.4 Base Light Transmission 7

3.4.5 Total Density 7

3.4.6 Splices 7

3.4.7 BIT Programmer Film-Tapes 7

3.4.8 FIM Film-Tapes 7

3* 4.9 Identification and Markings 7

3.4.9. 1 Code Number 7

3.4.9. 2 Program Changes 11

3.4.9. 3 Film-Tape End Identif ication 11

3.4.9. 4 Film Edge Markings 11

3.4.10 Tape Ends 11

3.4.11 Film-Tape Spools 11

3.4.12 Film-Tape Storage 11

3.4.13 Film-Tape Winding 11

3. 4.13.1 Semiautomatic Built-In-Test Film-Tapes 11

3.4. 13.2 Semiautomatic Test, Fault Isolation Meter 12

4. QUALITY ASSURANCE PRO VISIONS 12

4. 1 Responsibility for Inspection 12

4.2 Classification of Inspection 12

4.3 Preproduction Tests 12

4. 3.1 Accessory Material 13

4. 3.2 Scope of Tests 13

4. 3.2.1 Base Light Density 13

4. 3.2.2 Total Density 13

4. 3.2.3 Film-Tape Thickness 13

4. 3.2.4 Dimensional Stability 14

4. 3.2.5 Environmental Tests 14

4. 3.2.6 Environmental Test Method 15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

	Page
4.4 Quality Conformance Tests	15
4.5 Test Procedures	17
4.6 Presubmission Testing	17
4.7 Rejection and Retest	18
4.8 Auxiliary Equipment	18
4.9 Design Data and Material	18
4, 9.1 Design Data	18
5. PREPARATION FOR DELIVERY	19
5.1 General	19
5.2 Preservation and Packaging	19
5.3 Packing	19
6. NOTES	19
6.1 Ordering Data	19
6.2 Precedence of Documents	19
6.3 Notations of Revisions	20
6.4 Availability of Documents	20

Pro ject No. 4935-N045

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-F-81526B(AS) FILM-TAPES, SEMIAUTOMATIC TEST

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8570

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:38Z
Check the source to verify that this is the current version before use.