MIL-F-52525/12A
30 June 1987
SUPERSEDING
MIL-F-52525/12
11 October 1978 and
MIL-F-52525/29
23 February 1982

MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES: FIELD ATTACHABLE (REUSABLE), SCREW-ON TO 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, TYPE 100R2, FOR USE WITH TYPE 100R2 DOUBLE WIRE BRAID HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fittings described herein shall consist of this specification and the latest issue of MIL-F-52525.

REQUIREMENTS:

1. The fitting shall conform to figure 1 and table I.

AMSC N/A FSC 4730
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R2 fittings.1/

Specification part number	Hose dash number	Hose I.D. (REF)	Tube dash number	Flange head		C		D	
				dash no.	size inch	Maximum inch	Maximum mm	Minimum inch	Minimum mm
M52525/12-8-8	8	1/2	8	-8	1/2	3.65	92.71	1.27	32.26
M52525/12-12-12	12	3/4	12	-12	3/4	4.40	111.76	1.36	34.54
M52525/12-16-16	16	1	16	-16	1	5.14	130.56	1.61	40.89
M52525/12-16-20	16	1	20	-20	1-1/4	5.14	130.56	1.61	40.89
M52525/12-20-20	20	1-1/4	20	-20	1-1/4	6.33	160.78	1.80	45.72
M52525/12-20-24	20	1-1/4	24	-24	1-1/2	6.33	160.78	1.80	45.72
M52525/12-24-24	24	1-1/2	24	-24	1-1/2	7.01	178.05	2.08	52.83
M52525/12-32-32	32	2	32	-32	2	8.62	218.95	2.44	61.98

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R2 fittings.1/ (Continued)

Specification part number	Hose dash number	Hose I.D. (REF)	Tube dash number	Flange head		F		O	
				dash no.	size inch	inch ±0.12	mm ±3.00	Maximum inch	Maximum mm
M52525/12-8-8	8	1/2	8	-8	1/2	1.63	41.40	1.38	35.05
M52525/12-12-12	12	3/4	12	-12	3/4	2.13	54.10	1.75	44.45
M52525/12-16-16	16	1	16	-16	1	2.38	60.45	2.06	52.32
M52525/12-16-20	16	1	20	-20	1-1/4	2.38	60.45	2.06	52.32
M52525/12-20-20	20	1-1/4	20	-20	1-1/4	2.62	66.55	2.63	66.80
M52525/12-20-24	20	1-1/4	24	-24	1-1/2	2.69	68.33	2.63	66.80
M52525/12-24-24	24	1-1/2	24	-24	1-1/2	3.12	79.25	2.94	74.68
M52525/12-32-32	32	2	32	-32	2	4.50	114.30	3.50	88.90

1/ All dimensions not shown shall conform to SAE J516.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

2. The maximum operating pressures shall be as specified in table II.

TABLE II. Maximum operating pressures of fittings.

Hose I.D. (REF) (inch)	PSI (pounds per square inch)	MPa (megapascals)
1/2	3500	24.1
3/4	2250	15.5
1	2000	13.8
1-1/4	1625	11.2
1-1/2	1250	8.6
2	1125	7.8


3. Marking shall include the manufacturer's name or trademark, size, and hose identifier R-2. Location of marking is optional.

4. This item must be listed on QPL-52525.

INTENDED USE: Type 100R2 fittings are for use with double wire braid reinforced hose conforming to MIL-H-52471, type 100R2.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size fitting covered by this specification sheet. The military specification sheet number, code number for size of hose, and code number for size of tube are combined to form the military specification part number.

EXAMPLE: Military specification part number

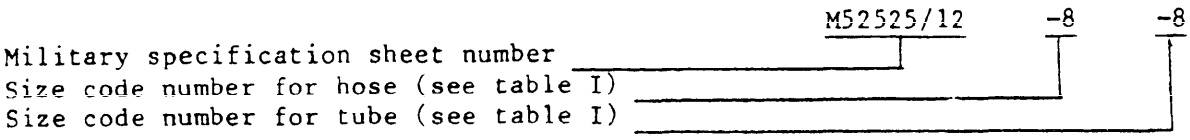

The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A, is Elbow, Hose to Flange.

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activities:
Army - GL
DLA - CS

Project 4730-0499

User activity:
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

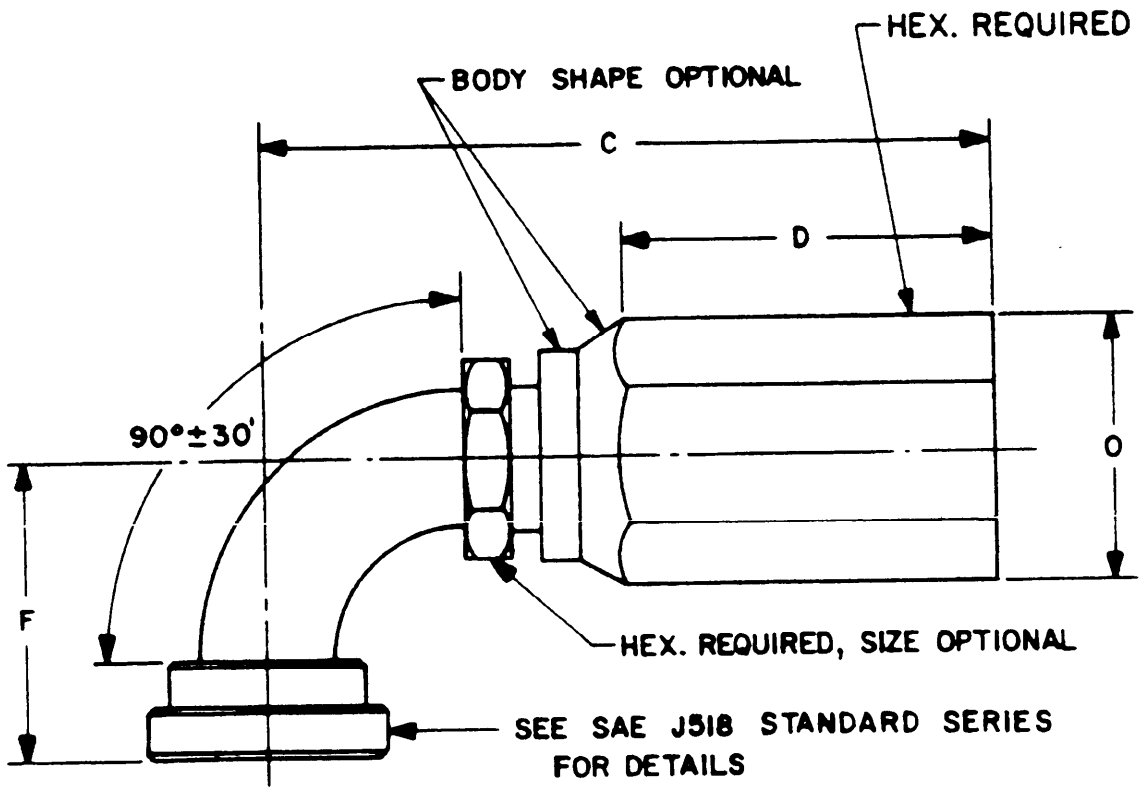


FIGURE 1. Fitting, screw-on to 4 bolt split flange, 90° bent tube.

X-3362A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.