MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, STRAIGHT-THRU, 30 THROUGH 110 CONTACT POSITIONS, CRIMP REMOVABLE CONTACTS (.100 SQUARE GRID)

This specification is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

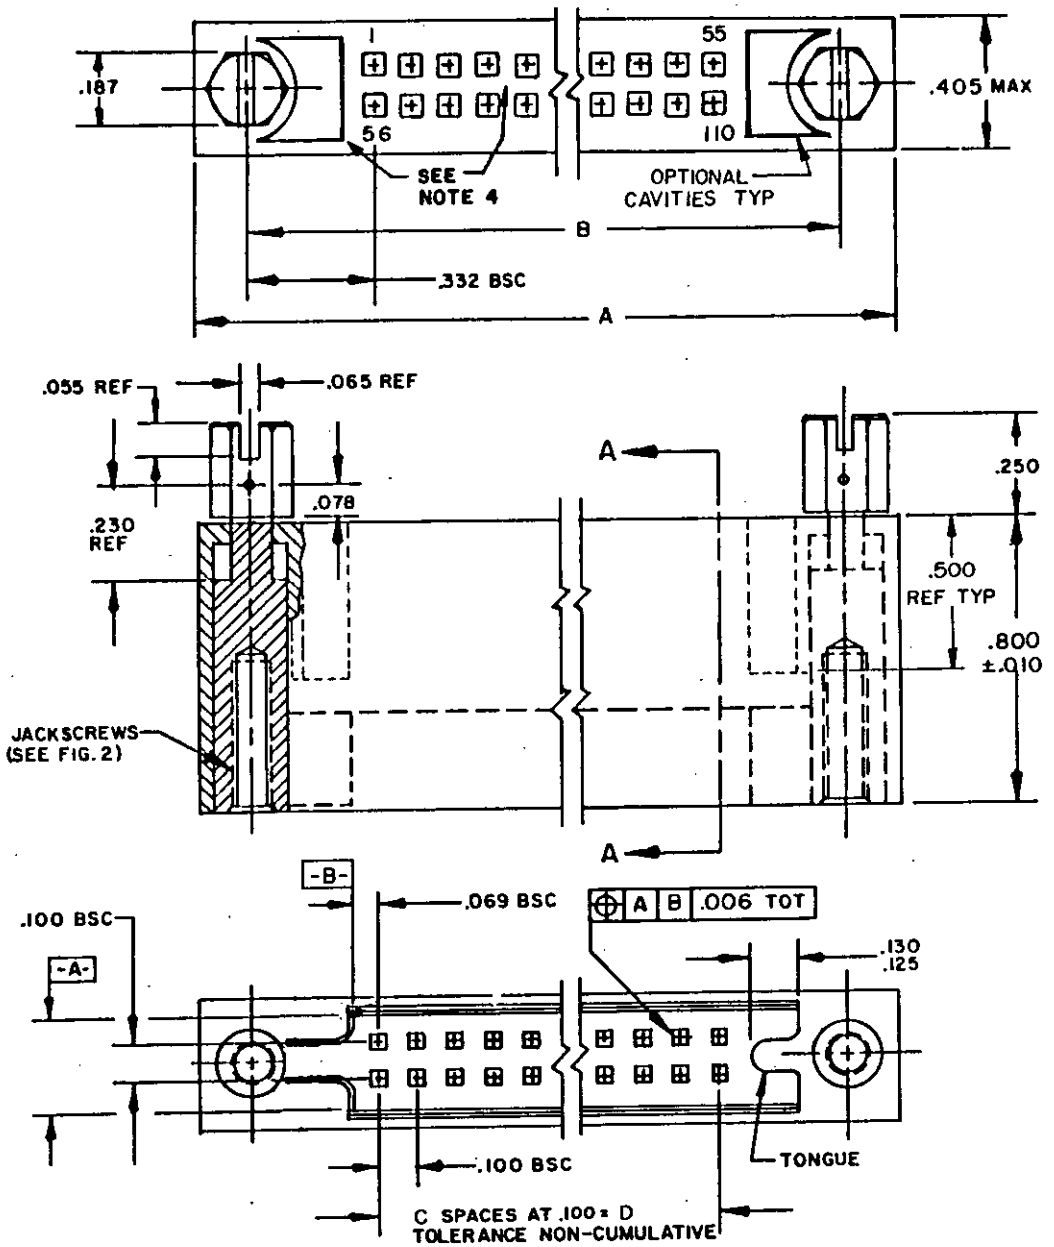


FIGURE 1. Connector, housing, plug (.100 square grid).

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.


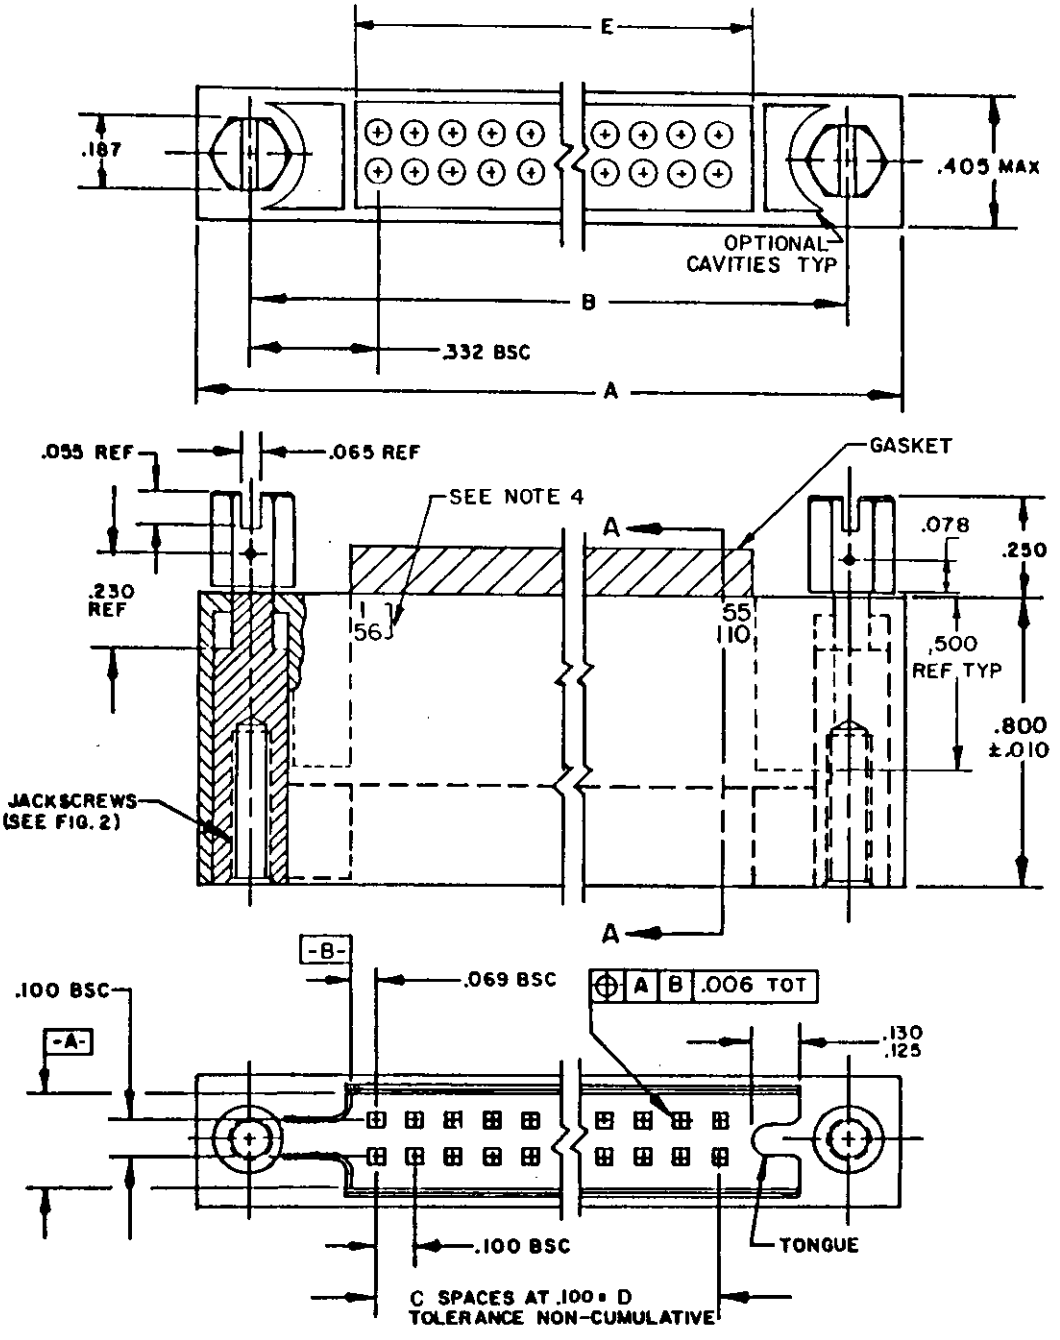


FIGURE 1. Connector, housing, plug, (.100 square grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

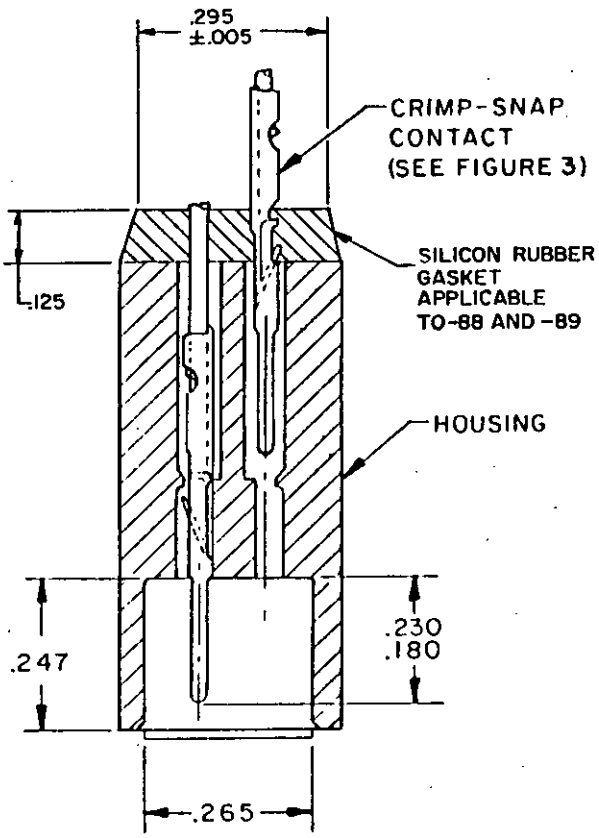


SECTION A-A

Inches	mm
.005	0.13
.006	0.15
.010	0.25
.015	0.38
.055	1.40
.065	1.65
.069	1.75
.078	1.98
.100	2.54
.125	3.18
.130	3.30
.135	3.43
.140	3.56
.180	4.57
.187	4.75
.230	5.84
.247	6.27
.250	6.35
.265	6.73
.332	8.43
.400	10.16
.800	20.32
3.400	86.36
4.065	103.25
4.355	110.62

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals.
4. Numbers indicating end cavities and lines indicating every fifth cavity are stamped on housing.

FIGURE 1. Connector, housing, plug (.100 square grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

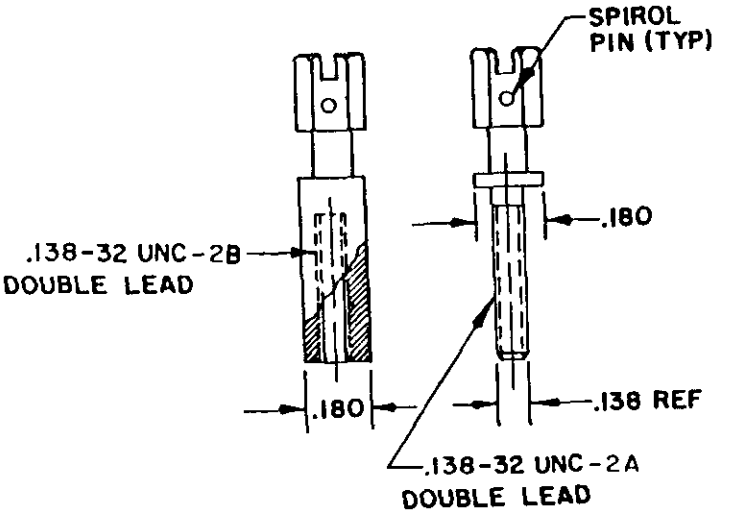


Inches	mm
.138	3.51
.180	4.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals.

FIGURE 2. Turnable jackscrews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

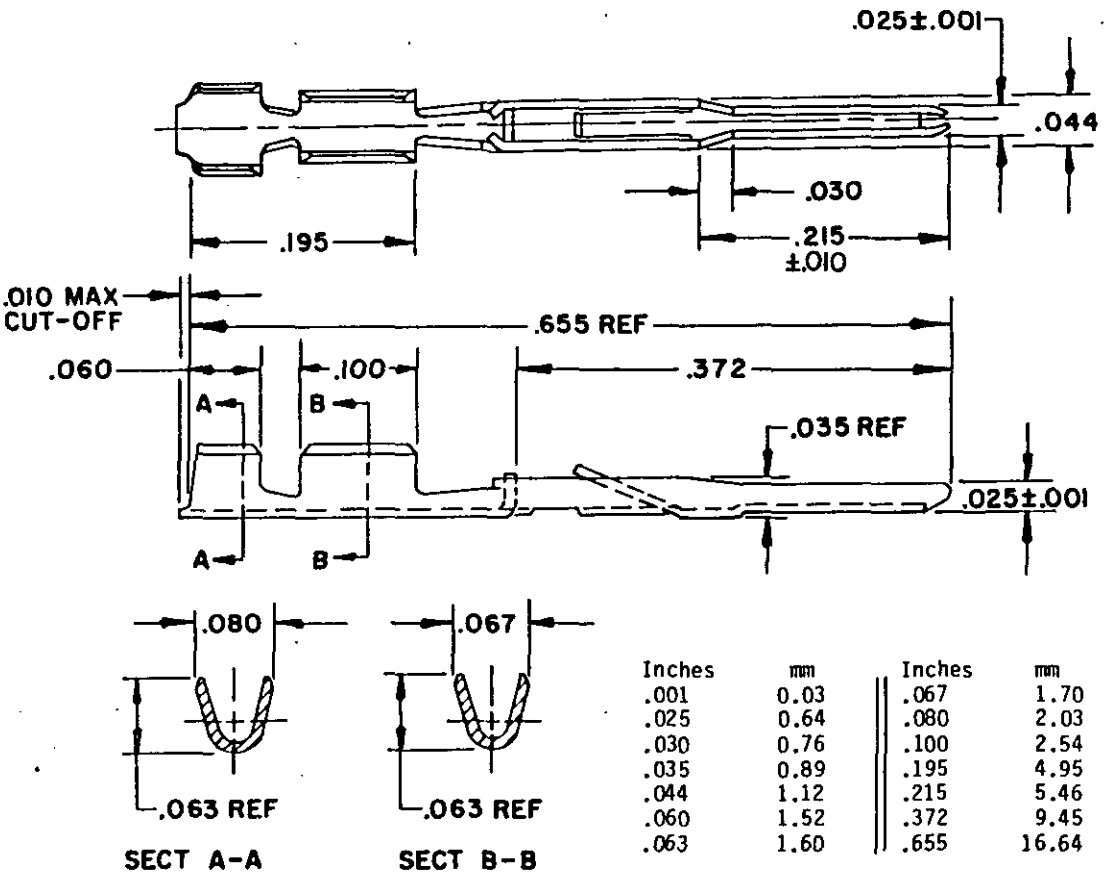


Inches	mm	Inches	mm
.001	0.03	.067	1.70
.025	0.64	.080	2.03
.030	0.76	.100	2.54
.035	0.89	.195	4.95
.044	1.12	.215	5.46
.060	1.52	.372	9.45
.063	1.60	.655	16.64

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm) on decimals.
4. Contact crimp for use with (AWG) wire range no. 22 to no. 26, insulation range .036 (.91 mm) to .054 (1.37 mm).

FIGURE 3. Pin contact, crimp-snap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

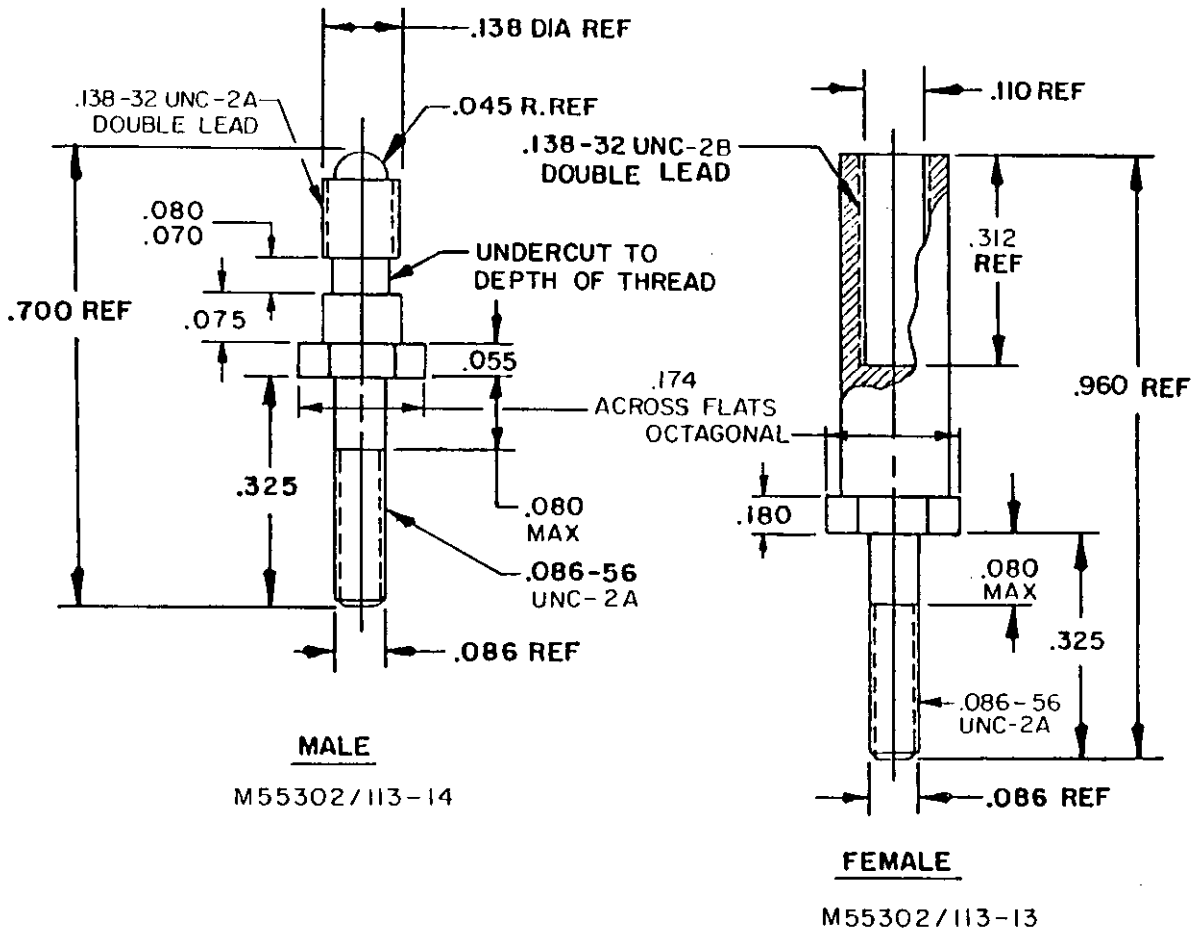

Inches	mm	Inches	mm
.045	1.14	.138	3.51
.055	1.40	.174	4.42
.070	1.78	.180	4.57
.075	1.91	.312	7.92
.080	2.03	.325	8.26
.086	2.18	.375	9.25
.110	2.79	.700	17.78
		.960	24.38

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) on decimals.
4. This connector mates with the external key type connectors specified in MIL-C-55302/27 and is equipped with mounting hardware, male and or female (see table III).

FIGURE 4. Mounting hardware for MIL-C-55302/27.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1 and table I.

Material:

Body: In accordance with MIL-C-55302.

Gasket: Silicon rubber.

Jackscrews and mounting hardware: Stainless steel in accordance with MIL-C-55302, passivated in accordance with QQ-P-35.

Contacts: Brass, in accordance with MIL-C-55302.

Plating: Contacts and their terminations shall be gold plated IAW MIL-C-55302 over nickel plating IAW MIL-C-55302.

Keying: See table II.

Crimp tool:

AMP hand tool P/N 90346-1, or approved equivalent. For use with M55302/113-05 contacts.

AMP automatic tool P/N 466625-3, or approved equivalent. For use with M55302/113-06 contacts.

Contact identification: See figure 1.

Mating and unmating: The maximum mating force, in pounds, shall not exceed a value equal to 0.25 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.025 times the number of contacts and shall not exceed the measured insertion force, when the housing is loaded with contacts and mated with connector specified in MIL-C-55302/27.

Current rating:

3.0 amperes maximum per contact.

2.25 amperes continuous per contact at 75°F.

Contact resistance: No individual contact pair shall have a resistance exceeding 0.020 ohm.

Contact retention: 3 pounds per contact.

Dielectric withstanding voltage:

Sea level: 900 volts rms.

High altitude: 200 volts rms.

Part number: M55302/113-(dash number from tables I, II, and III.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Housing dash numbers (without hardware), contact positions, and dimensions.

Dash number	Number of positions	Contact identification numbers	A	B	C	D	E
-15	30	1 15 16 30	2.355 (59.82)	2.065 (52.45)	14	1.400 (35.56)	N/A
-16	40	1 20 21 40	2.855 (72.52)	2.565 (65.15)	19	1.900 (48.26)	N/A
-17	50	1 25 26 50	3.355 (85.22)	3.065 (77.85)	24	2.400 (60.96)	N/A
-18	60	1 30 31 60	3.855 (97.92)	3.565 (90.55)	29	2.900 (73.66)	N/A
-19	70	1 35 36 70	4.355 (110.62)	4.065 (103.25)	34	3.400 (86.36)	N/A
-20	80	1 40 41 80	4.855 (123.32)	4.565 (115.95)	39	3.900 (99.06)	N/A
-21	90	1 45 46 90	5.355 (136.02)	5.065 (128.65)	44	4.400 (111.76)	N/A
-22	100	1 50 51 100	5.855 (148.72)	5.565 (141.35)	49	4.900 (124.46)	N/A
-23	110	1 55 56 110	6.355 (161.42)	6.065 (154.05)	54	5.400 (137.16)	N/A
-88	70	1 35 36 70	4.355 (110.62)	4.065 (103.25)	34	3.400 (86.36)	3.600 ±.010 (91.44) ±(0.25)
-89	110	1 55 56 110	6.355 (161.42)	6.065 (154.05)	54	5.400 (137.16)	5.600 ±.010 (142.24) ±(.25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

TABLE II. Dash number for pin header housing assembly. 1/

Assembly dash number	Housing pin header	Keying jackscrews	
		Groove end	Tongue end
-07	-19	-11	-11
-08		-11	-12
-09		-12	-11
-10		-12	-12
-28	-15	-11	-11
-29		-11	-12
-30		-12	-11
-31		-12	-12
-36	-16	-11	-11
-37		-11	-12
-38		-12	-11
-39		-12	-12
-44	-17	-11	-11
-45		-11	-12
-46		-12	-11
-47		-12	-12
-52	-18	-11	-11
-53		-11	-12
-54		-12	-11
-55		-12	-12
-60	-20	-11	-11
-61		-11	-12
-62		-12	-11
-63		-12	-12
-68	-21	-11	-11
-69		-11	-12
-70		-12	-11
-71		-12	-12
-76	-22	-11	-11
-77		-11	-12
-78		-12	-11
-79		-12	-12
-84	-23	-11	-11
-85		-11	-12
-86		-12	-11
-87		-12	-12
-90	-88	-11	-11
-91		-11	-12
-92		-12	-11
-93		-12	-12
-94	-89	-11	-11
-95		-11	-12
-96		-12	-11
-97		-12	-12

1/ Pin header housing assembly consists of housing with jackscrews installed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

TABLE III. Dash number for connector kits and component parts. 1/

Kit dash number	Assembly pin header housing (see table II)	Hardware, receptacle mounting (see figure 4)			Contacts (loose piece) 2/
		-14	-13	2-56 nut	-05 3/
-01	-7	2	0		
-02	-8	1	1	2	70
-03	-9	1	1		
-04	-10	0	2		
-24	-28	2	0		
-25	-29	1	1	2	30
-26	-30	1	1		
-27	-31	0	2		
-32	-36	2	0		
-33	-37	1	1	2	40
-34	-38	1	1		
-35	-39	0	2		
-40	-44	2	0		
-41	-45	1	1	2	50
-42	-46	1	1		
-43	-47	0	2		
-48	-52	2	0		
-49	-53	1	1	2	60
-50	-54	1	1		
-51	-55	0	2		
-56	-60	2	0		
-57	-61	1	1	2	80
-58	-62	1	1		
-59	-63	0	2		
-64	-68	2	0		
-65	-69	1	1	2	90
-66	-70	1	1		
-67	-71	0	2		
-72	-76	2	0		
-73	-77	1	1	2	100
-74	-78	1	1		
-75	-79	0	2		
-80	-84	2	0		
-81	-85	1	1	2	
-82	-86	1	1		110
-83	-87	0	2		
-98	-90	2	0		
-99	-91	1	1	2	70
-100	-92	1	1		
-101	-93	0	2		
-102	-94	2	0		
-103	-95	1	1	2	110
-104	-96	1	1		
-105	-97	0	2		

1/ Component parts may be ordered separately.
2/ -06 contacts are supplied in reel form.
3/ Contacts shipped loose in a plastic bag, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

Custodian:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F314-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.