INCH-POUND


MIL-PRF-55339/56
w/AMENDMENT 1
8 March 2023
SUPERSEDING
MIL-PRF-55339/56
10 December 2017

PERFORMANCE SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY,
(BETWEEN SERIES N TO SERIES TNC), CLASS 2, STRAIGHT PLUG

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55339.

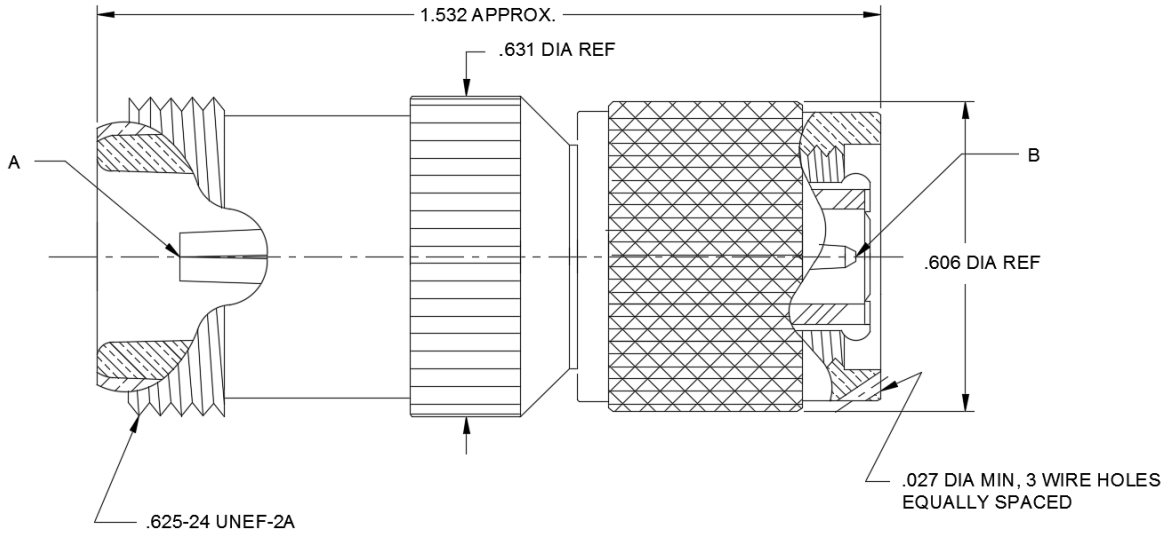


| Reference | Series | Contact |
|---|---|---|
| A | N | Socket |
| B | TNC | Pin |

NOTES:
1. Dimensions are in inches.
2. All undimensioned pictorial representations are for reference purposes only.
3. Interfaces shall be in accordance with MIL-STD-348.

FIGURE 1. General configuration.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nominal.

Working voltage:

Sea level: 500 Vrms.

70,000 feet (4.437 kPa): 125 Vrms

Frequency range: 5 to 11 GHz.

Temperature range: -65° to +165°C.

PERFORMANCE (installation torque of 6 to 10 in. lb, series N).

Dimensions: See figure 1 and MIL-STD-348.

| Center contact retention: | Series TNC | Series N |
|---|---|---|
| Axial force (lb, minimum) | 6 | 6 |
| Torque (in. oz, minimum) | N/A | N/A |

| Force to engage and disengage: | Series TNC | Series N |
|---|---|---|
| Longitudinal force (lb, maximum) | 3.2 | N/A |
| Torque (in, lb, maximum) | 2 | 6.0 |

Coupling proof torque: 15 in. lb, minimum, series N.

Mating characteristics:

Center contact (socket) series TNC:

Oversize test pin diameter: .057 inch, minimum.

Insertion depth: .125 inch, minimum.

Number of insertions: 1.

Maximum test pin (insertion force test) series TNC:

Steel test pin diameter: .054 inch, minimum.

Pin finish: 16 microinches.

Insertion force: 2 lb, maximum.

Number of insertions: 1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

Minimum test pin (withdrawal force) series TNC:

Steel test pin diameter: .052 inch, maximum.

Pin finish: 16 microinches.

Withdrawal force: 2 oz, minimum.

Number of withdrawals: 1.

Outer contact, series N:

Minimum test ring ID: .316 inch, maximum.

PIN finish: 16 microinches.

Insertion force: 25 lb, maximum.

Insertion depth: .093 inch, minimum.

Number of insertions: 1.

Slotted member contacts only, series N.

Maximum test ring ID: .324 inch, minimum.

Test ring finish: 16 microinches.

Insertion depth: .031 inch, maximum.

Number of insertions: 1.

Permeability: <2.0

Seal:

Hermetic: Not applicable.

Pressurized: Not applicable.

Weatherproof: Not applicable.

Insulation resistance: 5,000 megohms, minimum.

VSWR: 1.35:1, maximum at .5 to 9 GHz. 1.5 maximum at 9 to 11 GHz.

RF leakage (total): -60dB, minimum, 2 to 3 GHz.

RF insertion loss: $.060\sqrt{F\,(GHz)}\;dB$ maximum, tested at 6 GHz.

Durability: 500 cycles minimum at 12 cycles/minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

Dielectric withstanding:

Test voltage: 1,500 Vrms, minimum (sea level).

Contact resistance (milliohms, maximum).

| Contact | Initial | After |
|---|---|---|
| Center | 2.0 | 2.5 |
| Outer | .25 | N/A |
| Outer (-70001) | .5 | N/A |

Vibration, high frequency:

Interruptions: 1 μs, maximum.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum.

Corona level:

Voltage: 375 V, minimum.

Altitude: 70,000 feet (4.437 kPa), minimum.

RF high potential withstanding voltage:

RF voltage: 1,000 Vrms, minimum.

Frequency: 5 MHz, minimum.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: 100 lb, minimum.

Part Identifying Numberr (PIN): M55339/56-00001 or

PIN: M55339/56-70001 **CAUTION: THIS PART HAS A NICKEL PLATED BODY AND IS NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents. In addition to MIL-PRF-55339, this document references the following:

MIL-STD-348

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

Review activities:
Army – AR, AT, EA
Navy – AS, MC, OS
Air Force - 19

(Project 5935-2022-234)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.