MIL-V-81995/4A(AS)
4 December 1981
SUPERSEDING
MIL-V-81995/4(AS)
25 JUNE 1980

MILITARY SPECIFICATION SHEET

VALVE, STARTER CONTROL, AIRCRAFT ENGINE, FOR TF34 ENGINE

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the starter control valve described herein shall consist of this specification and the latest issue of Specification MIL-V-81995.

REQUIREMENTS:

Envelope: Figure 1

Weight: 7.0 lb maximum

Aircraft Model: S-3A

Engine Model: TF 34

Inlet Air Conditions:

Rated Pressure: 65 psia

Rated Temperature: 400°F (205°C)

Maximum Pressure: 175 psia

Maximum Temperature: 760°F (405°C)

Maximum Engine Interbleed Pressure: 310 psia

Minimum Pressure: 16 psig

(A) Regulating Pressure: 38.5 ± 4.0 psig at inlet pressures to 135 psig at airflows from 50 lb/min to 200 lb/min.

(A) DENOTES CHANGES

FSC 2995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

Flow: The flow rate for all test conditions shall be limited by a fixed orifice or nozzle which will produce an airflow of 100 ± 10 lb/min at orifice and nozzle inlet conditions of 100 ± 0.5 in Hg abs and 345 ± 10°F (174 ± 6°C).

Rate of Pressure Rise: The initial pressure rise shall be limited to a maximum of 22 psi/sec during the first 0.5 second after the first indication of pressure rise and thereafter the pressure rise shall be smooth and at a positive rate.

Opening and Closing Times: Open 5 seconds maximum; close 0.5 second maximum.

Pressure Drop: Pressure drop shall not exceed 0.3 psi.

Leakage: Internal shall not exceed 0.3 lb/min and total shall not exceed 0.5 lb/min when subjected to inlet air at 172 psig at 600 ± 30°F (316 ± 16°C).

Altitude:

a. Maximum operating: 30,000 ft

b. Maximum nonoperating: 55,000 ft

Ambient Temperature Range:

a. Operating: -65 to +760°F (-54 to +405°C)

b. Nonoperating: -65 to +1020°F (-54 to +549°C)

Flight and Ground Loading:

a. Flight maneuvering: 30g

b. Shear: 50 lb

c. Axial: 100 lb

d. Moment: 300 in-lb

Vibration: See Figure 2.

Military Part Number: The military part number of the valve shall be M81995/4. This valve supersedes ATSCV-1.

Preparing Activity
Navy - AS
(Project No. 2995-N133)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

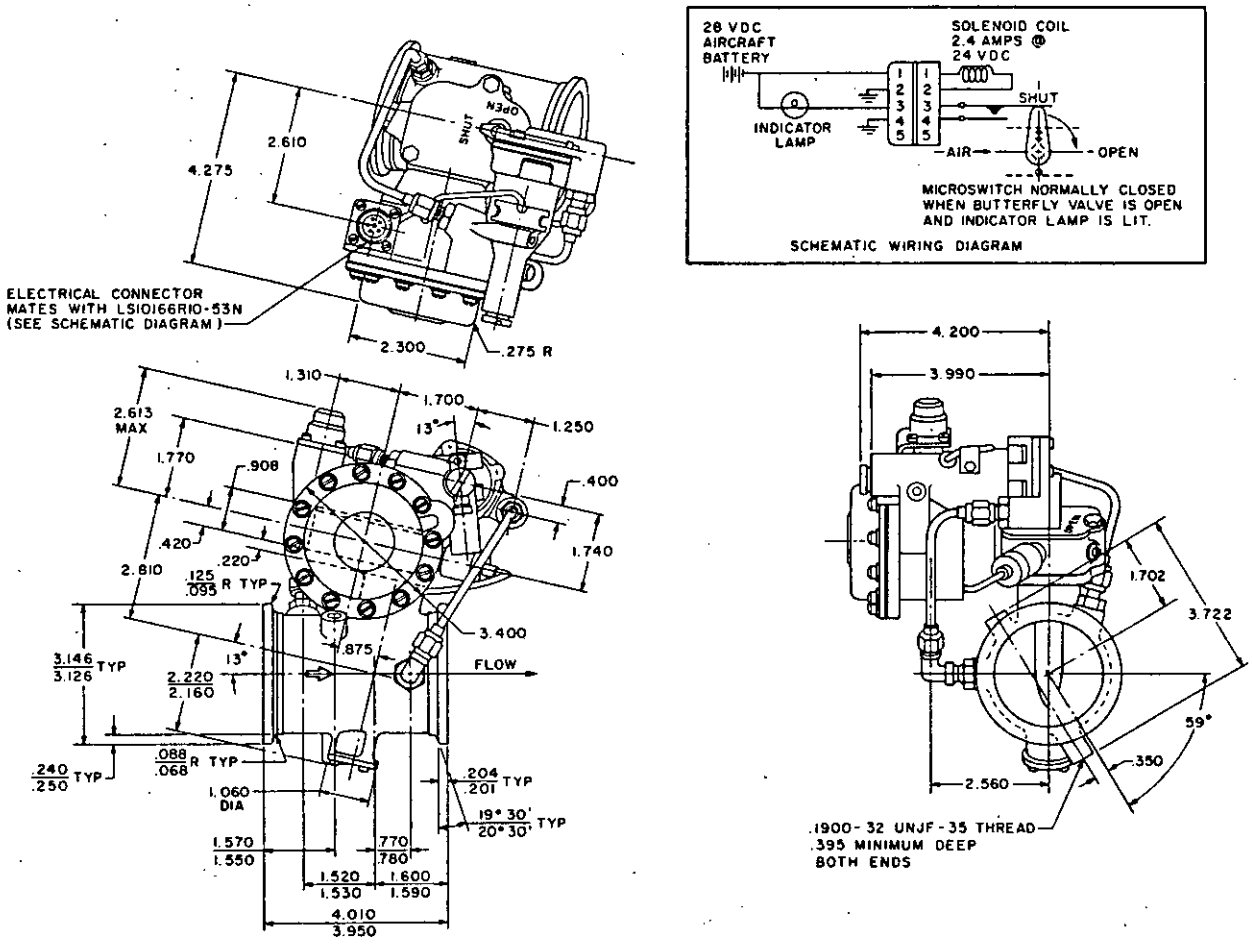


FIGURE 1. Dimensions and electric circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

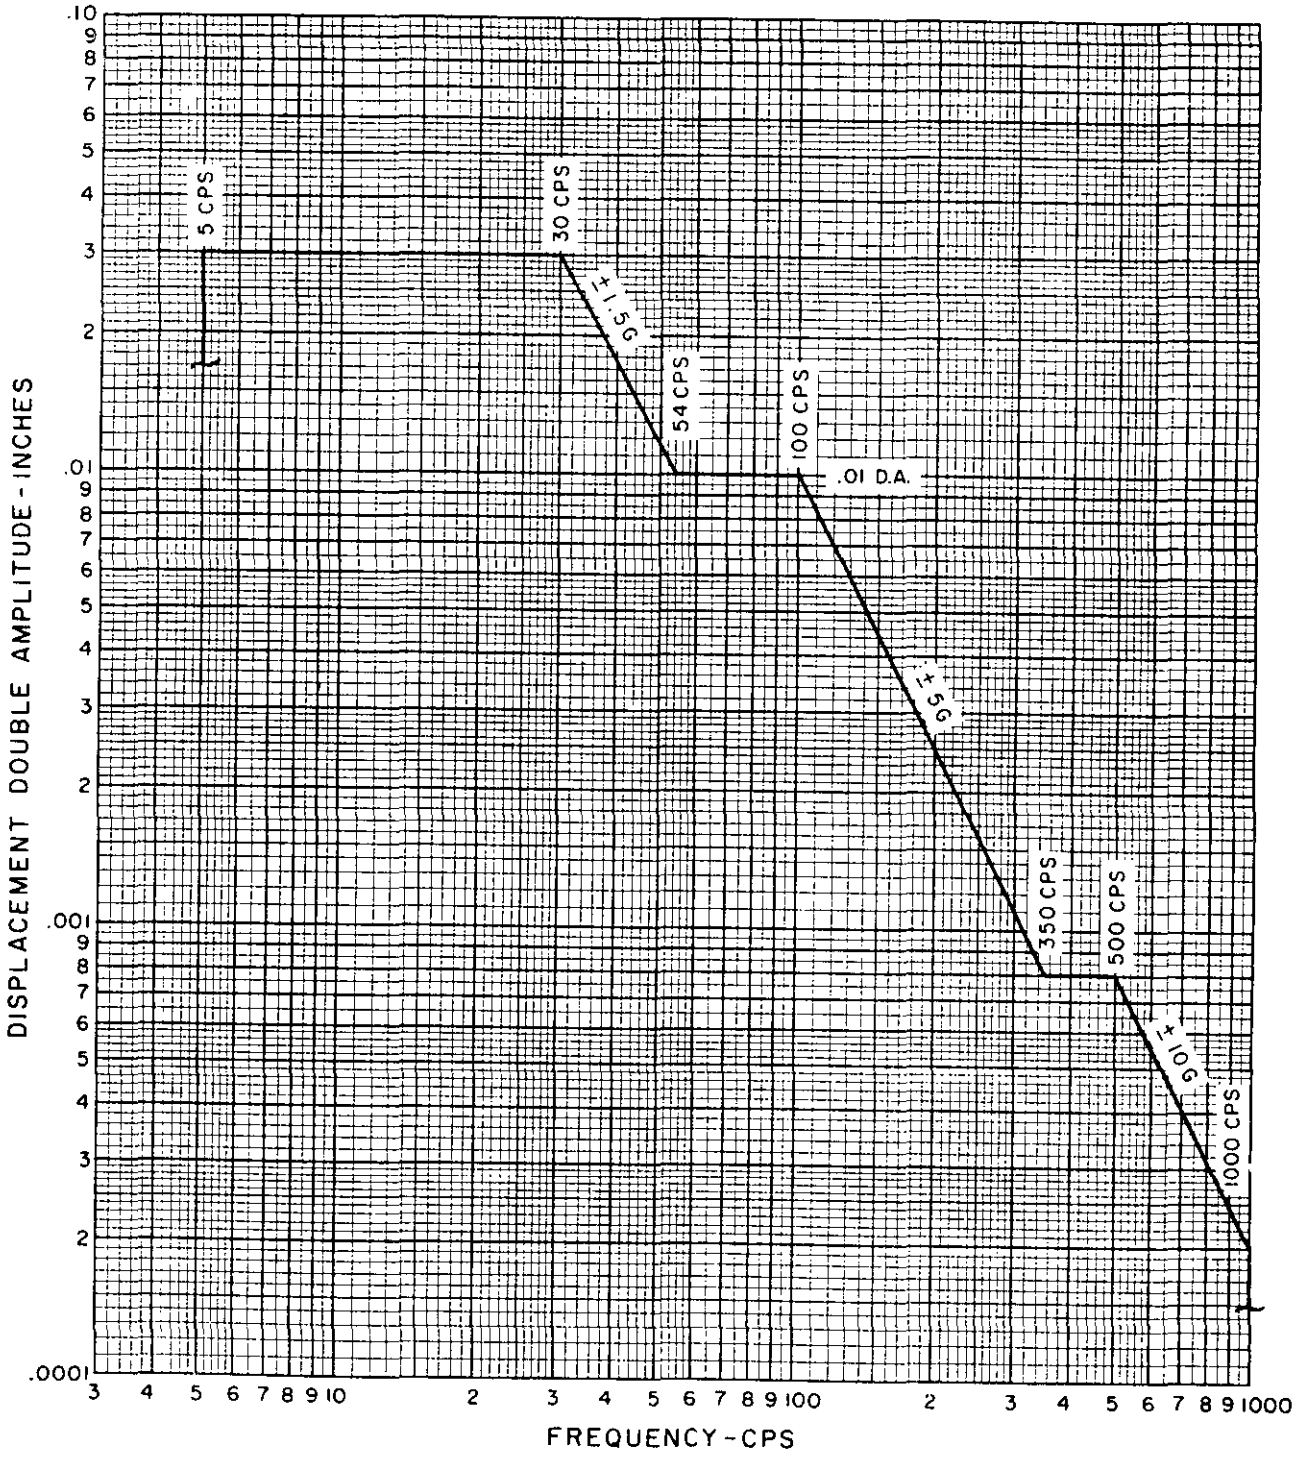


FIGURE 2. Vibration spectrum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.