MILITARY SPECIFICATION SHEET

VALVE, STARTER CONTROL, AIRCRAFT ENGINE, FOR T56 ENGINE/C-2 AIRCRAFT

This specification is approved for use within the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the starter control valve described herein shall consist of this specification and the latest issue of MIL-V-81995.

REQUIREMENTS:

Envelope: Figures 1 and 2

Weight: 8.0 lb maximum

Aircraft Model: C-2

Engine Model: T56

Inlet Air Conditions:

Rated Pressure: 98 psia

Rated Temperature: 545°F (285°C)

Maximum Pressure: 150 psia

Maximum Temperature: 800°F (427°C)

Maximum Engine Interbleed Pressure: 125 psia

Maximum Pressure: 16 psig

Regulating Pressure: 37.0 ±2.5 psig at inlet pressures to 135 psig at airflows from 50 lb/min to 200 lb/min.

FSC 2995

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

Flow: The flow rate for all test conditions shall be limited by a fixed orifice or nozzle which will produce an airflow of 100 ±10 lb/min at orifice and nozzle inlet conditions of 100 ±0.5 in Hg abs and 345 ±10°F (174 ±6°C).

Rate of Pressure Rise: The initial pressure rise shall be limited to a maximum of 22 psi/sec during the first 0.5 second after the first indication of pressure rise and thereafter the pressure rise shall be smooth and at a positive rate.

Opening and Closing Times: Open 5 seconds maximum; close 0.5 second maximum

Pressure Drop: Pressure drop shall not exceed 0.3 psi.

Leakage: Internal shall not exceed 0.3 lb/min and total shall not exceed 0.5 lb/min when subjected to inlet air at 172 psig at 600 ±30°F (316 ±16°C).

Altitude:

a. Maximum operating: 30,000 ft

b. Maximum nonoperating: 55,000 ft

Ambient Temperature Range:

a. Operating: -65 to +250°F (-54 to +121°C)

b. Nonoperating: -65 to +300°F (-54 to +150°C)

Flight and Ground Loading:

a. Flight maneuvering: 30g

b. Shear: 50 lb

c. Axial: 100 lb

d. Moment: 300 in-lb

Vibration: See Figure 3.

Military Part Number: The military part number of the valve shall be M81995/5. This valve supersedes ATSCV-1.

Preparing Activity
Navy - AS
(Project No. 2995-N152)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

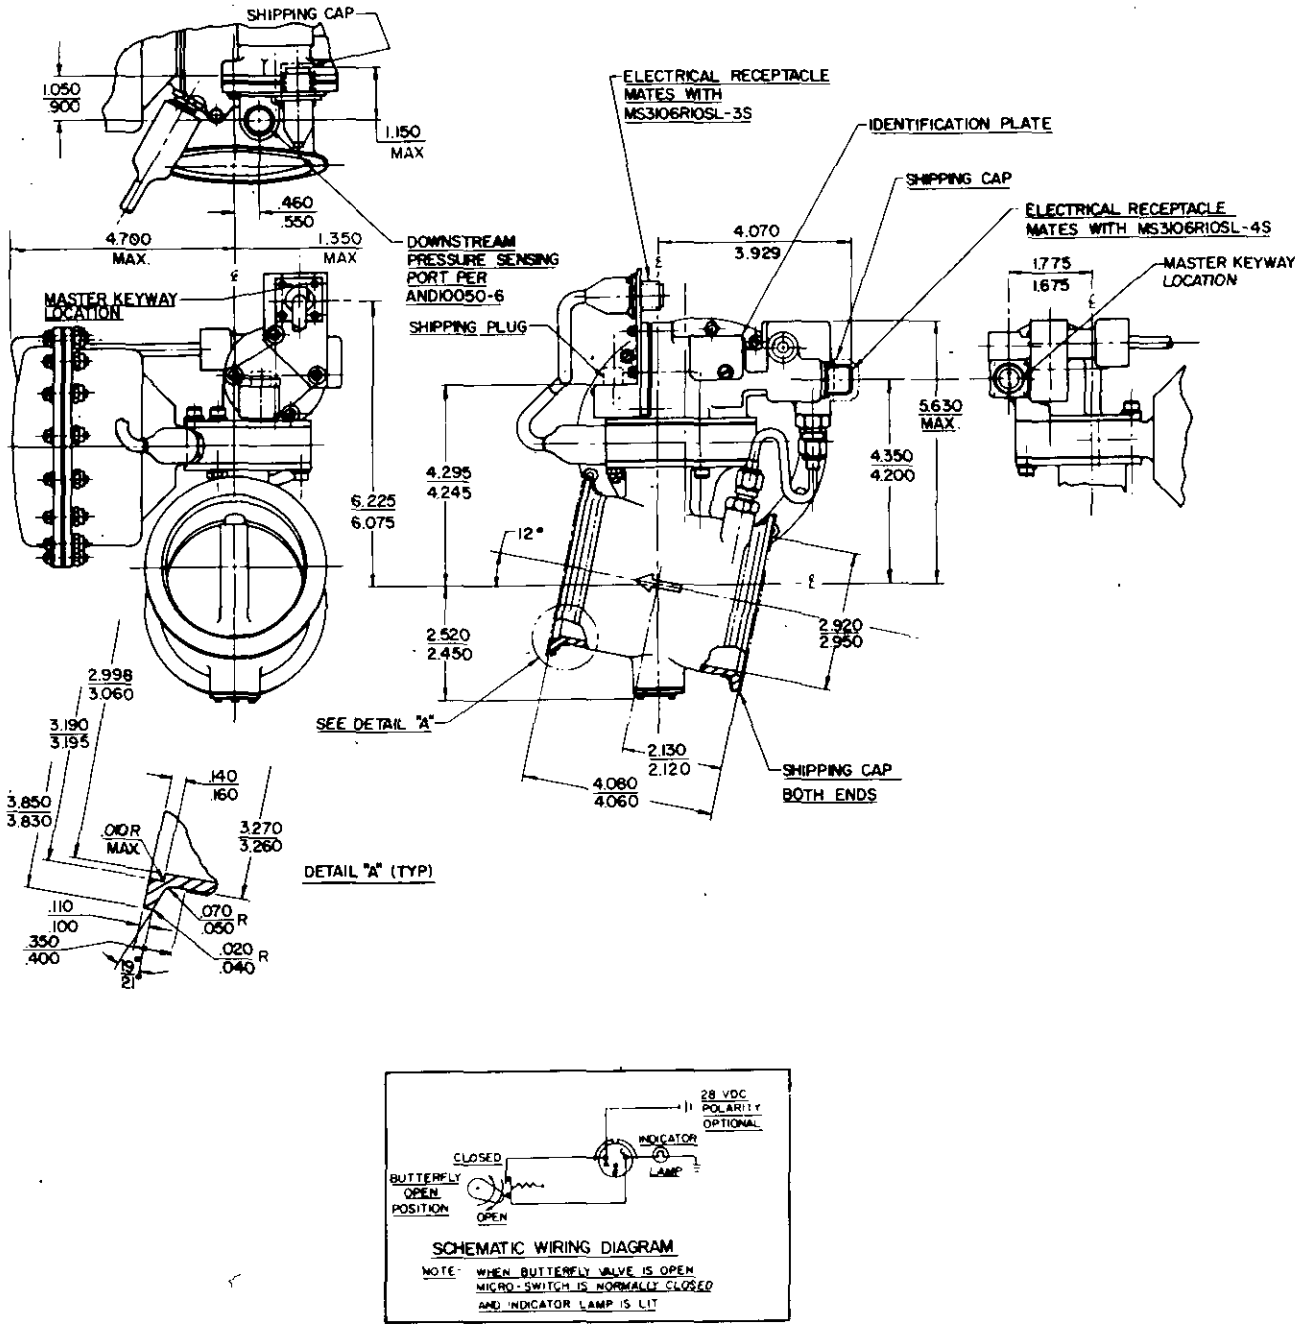


FIGURE 1. Dimensions and electric circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

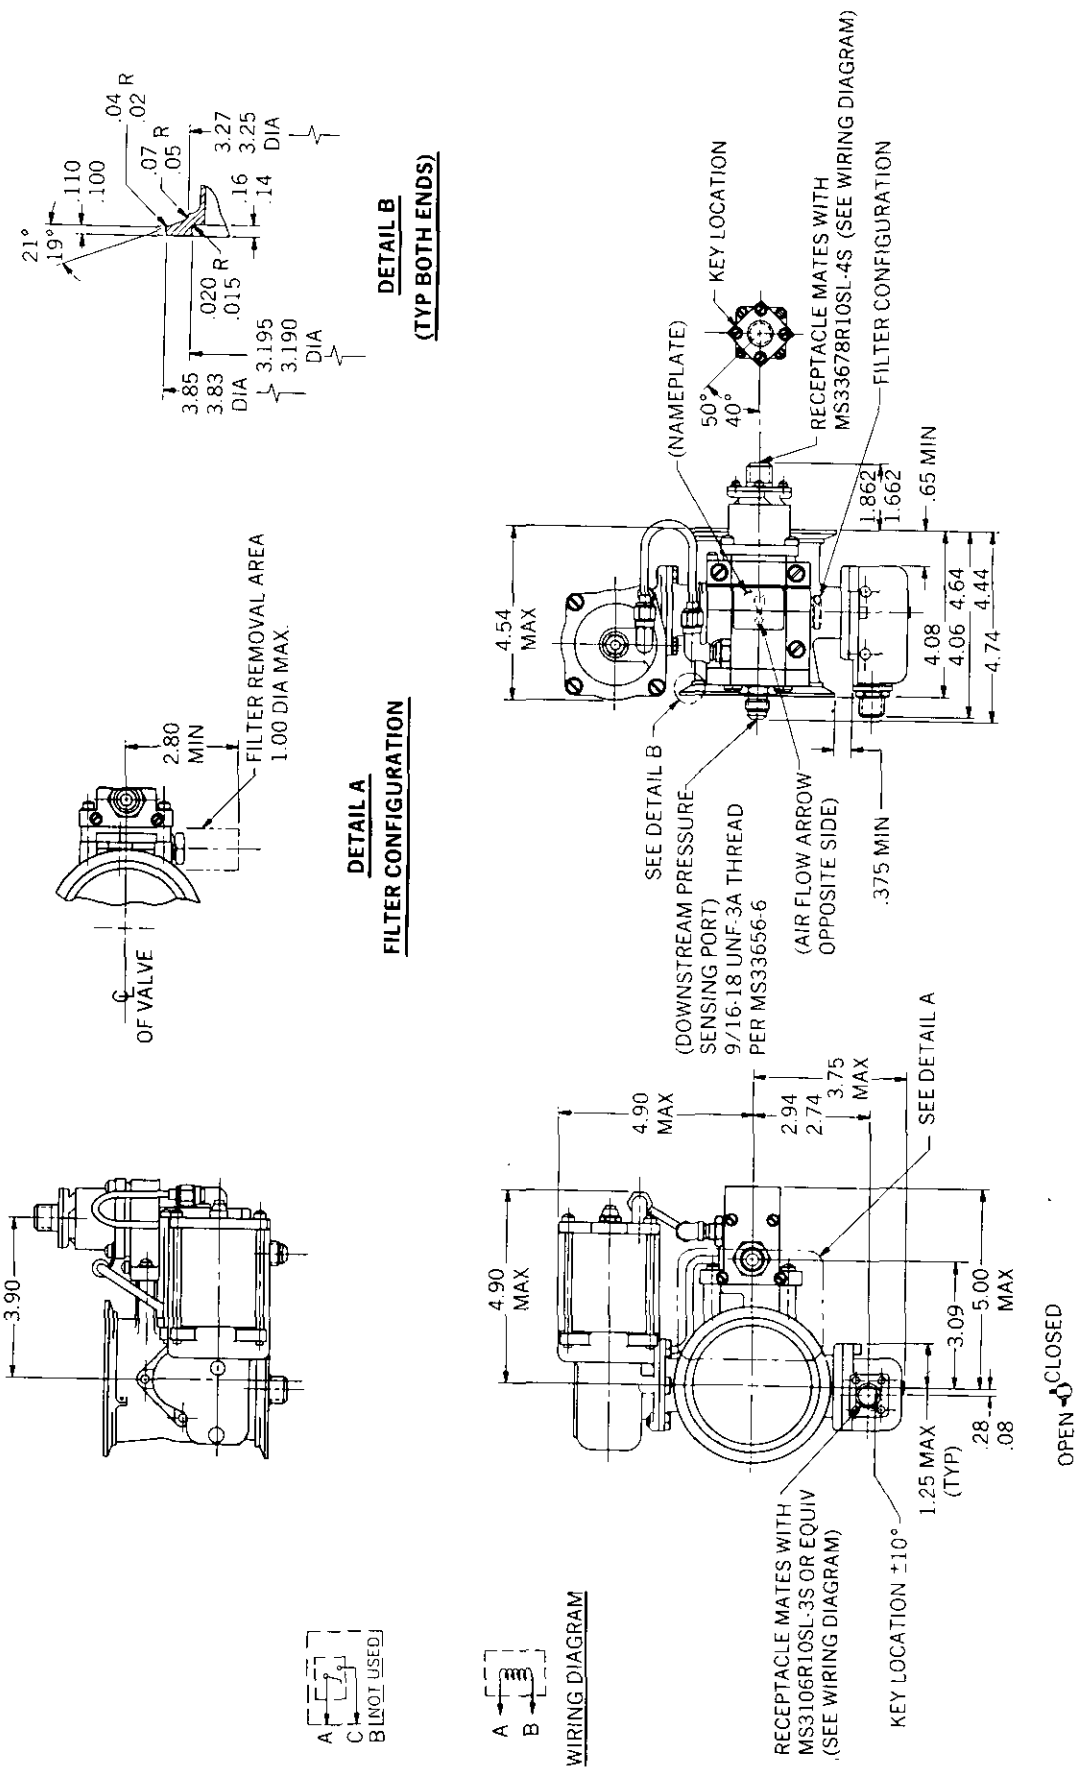


FIGURE 2. Alternate dimensions and electric circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.

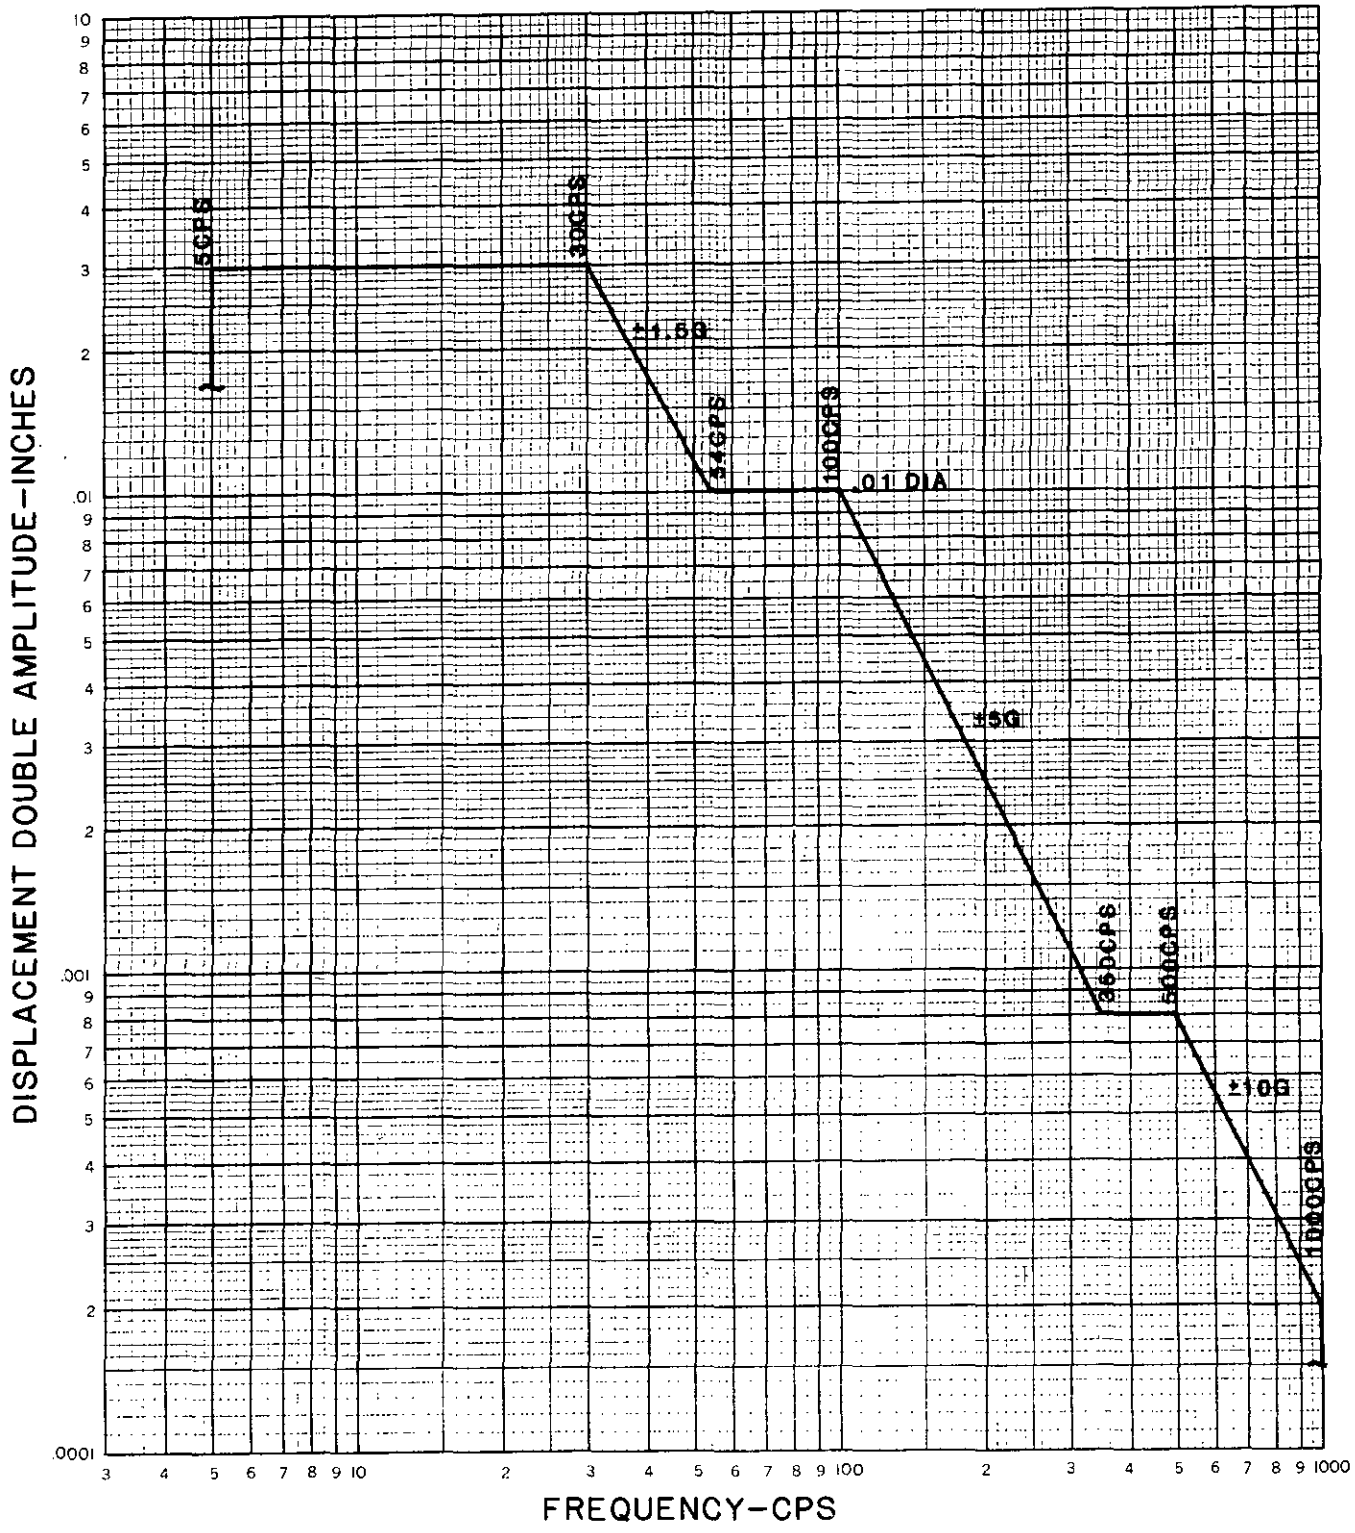


FIGURE 3. Vibration spectrum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:36Z
Check the source to verify that this is the current version before use.