MIL-C-43859A(GL)
8 March 1978
SUPERSEDING
MIL-C-43859(GL)
29 June 1973

MILITARY SPECIFICATION

COUPLING, EXTRACTION FORCE TRANSFER, AIRDROP

This specification is approved for use by the Natick Research and Development Command(GL), Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of airdrop extraction force transfer coupling assembly, consisting of an actuatory assembly, latch assembly, link assembly, cable assembly, latch assembly adapter and link assembly adapter.

1.2 Classification. Cables covered by this specification shall be of the following lengths as specified (see 6.2):

12 foot (3.66 m) cable
16 foot (4.88 m) cable
20 foot (6.10 m) cable
24 foot (7.32 m) cable
28 foot (8.53 m) cable

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Boxes, Setup
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-L-10547	-	Liners, Case and Sheet, Overwrap; Water-vaporproof or Waterproof, Flexible

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads on 40" X 48" Pallets

DRAWING

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT COMMAND

11-1-2060	-	Coupling, Extraction Force Transfer, Airdrop

(A miniature copy of Drawing 11-1-2060, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

3.2 Materials and construction. Components of the coupling assembly shall conform to the materials, construction and supplementary processes shown or specified on the Drawing 11-1-2060 and detail drawings subsidiary thereto (see 6.5).

3.3 Performance.

3.3.1 Latch, latch adapter, link and link adapter assemblies.

3.3.1.1 Proofload. The latch, latch adapter, link and link adapter (when provided) assemblies shall show no evidence of release, failure or visible permanent deformation when subjected to 60,000 pounds (266,890 N) proofload as specified in 4.5.2.1.

3.3.1.2 Function. The force applied to the catch component of the latch assembly to effect release and separation of the link shall be within the range of 15 to 45 pounds (67 to 200 N) with the assemblies under 50,000 pounds (222,410 N) tension load, and not be less than 8 pounds (36 N) on reduction of the tension load to 50 pounds (222 N). Assemblies tested in 4.5.2.2 shall show no evidence of premature release, component failure, or loosening of friction pads in sideplates of the latch assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

3.3.1.3 Impact resistance. The components retainer hook, side plates, idler link, catch, lock link, pins and idler link sleeves of latch assembly and cam of link assembly subjected to functional tests, shall show no evidence of failure or visible permanent deformation beyond allowable limits as set forth on component parts drawings and as may result from local brinelling of impacting surfaces when examined as specified in 4.5.2.3.

3.3.2 Actuator assembly, function.

3.3.2.1 Spring output. The actuator assembly shall deliver an output force within the range of 200 to 300 pounds (890 to 1335 N) without evidence of failure or malfunction when tested as specified in 4.8.1.1.

3.3.2.2 Cyclic. When cycled as specified in 4.8.1.2 the actuator arm shall rotate freely and latch securely. The arm, arm stop block and cable actuator stop block shall show no evidence of failure or permanent deformation, except as allowed by the dimensional limits on the drawing for the arm, and as may result from local brinelling of impacting surfaces.

3.3.3 Cable assembly.

3.3.3.1 Cable assembly proofload. The wire rope, conduit, terminal fittings and strain relief shall show no evidence of failure, slippage or visible permanent deformation when subjected to proofloads specified on the drawings, when tested as specified in 4.8.2.1.

3.3.3.2 Friction loss. Friction loss shall conform to the requirements of Drawing 11-1-2061 when tested as specified in 4.8.2.2.

3.4 Workmanship. All components and assemblies of the extraction force coupling shall be free of any rust or corrosion, dirt and other foreign matter. External surfaces shall be free from sharp edges or burrs. Components shall not be fractured, cracked, buckled, loose, dented, missing, malformed or misaligned.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article. When a first article is required (see 6.2), the complete coupling or cable assembly, as applicable, shall be examined for defects in table I and tested for performance requirements per 4.5.2 and 4.8 tests, as specified.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection. Inspection shall be made at appropriate stages of fabrication to determine conformance to the requirements of this specification. The Government reserves the right to exclude from consideration for acceptance any materials for which in-process inspection has indicated nonconformance.

4.4.2.1 Heat treatment examination. Heat treated components shall be inspected to determine compliance with requirements specified on the applicable drawings. The provisions of MIL-H-6875, applicable to routine quality control, shall apply, except that batch sampling with an inspection level of S-4 and an AQL of 1.0 (percent defective) applies.

4.4.2.2 Magnetic particle inspection. Each latch and link component and the arm of the actuator assembly, Part Number 11-1-1746, shall be inspected in accordance with MIL-I-6868 for determination of compliance with drawing requirements.

4.4.2.3 Assembly. Each latch and actuator assembly shall be inspected during assembly for determination of compliance with assembly requirements specified on the applicable drawings that are not susceptible to inspection after assembly. Any nonconformance shall be corrected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

4.4.3 Intermediate inspection. The sample unit for this inspection shall be one link, latch adapter, link adapter, latch, actuator or cable assembly, as applicable (see 3.2). Lots shall be expressed in units of components of one kind for each separately procured component of the coupling assembly. The inspection level shall be S-1 with an AQL of 4.0 expressed in terms of percent defective.

4.4.3.1 Visual examination. An examination shall be made of the components for defects listed in table I. The inspection level shall be I with an acceptable quality level (AQL) of 1.0 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish, protective	Supplementary finish omitted, wrong type or tacky	X	
	Primary finish not as specified	X	
	Any area of rust or corrosion	X	
	Imbedded dirt or other foreign matter		X
Surface texture	Roughness exceeds limit on: 32 and 63 microinch surfaces (810 and 1600 nm) surfaces	X	
	125 and 250 microinch (3180 and 6250 nm) surfaces		X
Construction and workmanship	Any component missing	X	
	Any fastener component wrong type or size	X	
	Any component cracked, fractured, malformed or misaligned	X	
	Any component not assembled or joined as specified	X	
	Any weld not type and size specified, missing or incomplete	X	
	Welds not flush where specified, excessive undercut or spatter		X
	Any operation (not otherwise covered) omitted or not performed as specified	X	
	Any sharp edges or burrs		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Identification marking	Missing, illegible, incorrect, not permanent		X
Special marking	"A" dimension on cable missing or incorrect	X	
	Color and legend on actuator locking pin warning tag missing or incorrect	X	
	Cocked position index marks on catch and lock link components of latch missing, not colored or incorrect	X	
	Matched pair identification on latch side plates missing or incorrect		X

4.5 End item inspection. The sample unit for this inspection shall consist of such components, from lots passing intermediate inspection, as are required to comprise a coupling assembly of one part number as specified on Drawing 11-1-2060. Lots shall be expressed in terms of such assemblies.

4.5.1 Assembly. Each coupling assembly shall be examined for completeness and proper components for the applicable assembly parts number. Incompleteness or improper components shall be cause for rejection.

4.5.2 Tests, latch and link assemblies. Each latch and link shall be cycled at least twice through the proofload and function tests specified herein. Sharp edges that may be raised in accessible edges of the link lock due to impact shall be removed. One out of every 100 or less latch and link combinations so cycled for proofload and function tests, randomly selected, shall be inspected as specified in 4.5.2.3.

4.5.2.1 Assembly proofload. Each latch and link with attached latch adapter and link adapter (when provided with the particular assembly) coupled in line as shown on Drawing 11-1-2060, and with the latch in cocked position, shall be secured in a suitable tension testing device. The means of connection shall ensure uniform distribution of load across the connection. A proofload of 60,000 pounds (266,890 N) shall then be applied for not less than 30 seconds. Failure to conform to the requirements of 3.3.1.1 shall be cause for rejection.

4.5.2.2 Function.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

(a) High release load. With each latch and link rigged as specified above for proofload, a suitable means for application and readout of release force shall be attached to the catch component of the latch in a manner similar to that in which the cable assembly would normally be attached. A load of 50,000 pounds (222,410 N) shall then be applied in the manner specified above for proofload, a separate tension force applied to the catch until release occurs, and the force required to effect release recorded.

(b) Low release load. Procedure shall be as specified in (a) above except the load shall be 50 pounds (222 N).

(c) The high and low release load tests, (a) and (b) above, shall be repeated in sequence, a second time. Failure of either or both high or low release load tests to conform to the requirements of 3.3.1.2 shall require repeating (a) and (b) a third time. Failure of either the high or low release load test to conform to 3.3.1.2 when performed the third time shall be cause for rejection of the latch and link.

4.5.2.3 Nondestructive. Selected latch and link combinations shall be disassembled and the components thereof specified in 3.3.1.3 reinspected as specified in 4.4.2.2 for any evidence of test induced cracks, and the hook, catch, idler links and pins dimensionally inspected for deformation beyond allowable limits. Any evidence of such failure, or deformation beyond allowable limits, shall be cause for rejection of the lot from which the sample was selected.

4.6 Inspection of packaging. An examination shall be made to determine that the preservation-packaging, packing and marking complies with section 5 requirements. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Characteristics to be examined and defects applicable thereto shall be as listed in table II. Examination for closure defects shall be made on shipping containers fully prepared for delivery. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

TABLE II. Packaging inspection

Examine	Defect
Markings (exterior and interior containers)	Omitted; incorrect; not legible; of improper size, location, sequence or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

TABLE II. Packaging inspection (cont'd)

Examine	Defect
Materials	Component missing, damaged, defective, or not as specified
Contents	Number more or less than specified Weight exceeds maximum specified
Workmanship	Unit packaging not as specified; contents not snug fit in interior container; improper closure of interior container; not snug fit in exterior container; improper closure of exterior container; loose strapping; inadequate stapling, bulging or distortion of container

4.7 Examination of palletization. An examination shall be made to determine that palletization is in compliance with 5.3. Defects shall be scored as specified in table III. The sample unit for this examination shall be one palletized unit load, ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III. Examination of palletization

Examine	Defect
Finished dimensions	Length, width or height exceeds specified maximum requirements
Palletization	Not as specified; pallet pattern not as specified; interlocking of loads not as specified; load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

4.8 Tests.

4.8.1 Actuator assembly, function.

4.8.1.1 Spring output. The assembled actuator, less housing cover, shall be secured to any suitable rigid fixture so as to permit unobstructed rotation of the actuator arm. A calibrated spring scale or other similar tension readout device shall be secured to the actuator and connected in line with the spring guide rod by a suitable connector that includes a means for applying a load to the tension device, such as a turnbuckle. The arm of the actuator shall be secured in the cocked position with the locking pin as shown on Drawing 11-1-1737. The connector between the actuator and tension device shall then be adjusted so that when the actuator arm is released, there is essentially no change in scale reading. The scale reading at this point shall be recorded. Failure to conform to the requirement of 3.3.2.1 shall be cause for rejection.

4.8.1.2 Cyclic. The assembled actuator, less scale and connector, shall be secured as specified in 4.8.1.1 and cycled five times from the cocked to the latched position in the manner for which it was designed. Manual restraint of the arm in the cocked position shall be required to permit free withdrawal of the locking pin. Failure to conform to the requirements of 3.3.2.2 shall be cause for rejection.

4.8.2 Cable assembly. The following tests shall be conducted in sequence. Failure to conform to any of the requirements of 3.3.3 shall be cause for rejection.

4.8.2.1 Proofloads.

(a) Wire rope terminals. The cable assembly shall be secured in a straight line in a suitable tension testing device by attachment to the wire rope terminals in a manner similar to that for which they were designed. Prior to application of the load, the wire rope shall be marked at the point where it enters the terminal. The specified load of 600 pounds (2,670 N) shall be applied and maintained for not less than 5 seconds.

(b) Conduit terminals. Except that the load shall be 300 pounds (1,335 N), proofload of the conduit terminals shall be similar to that specified above for the wire rope terminals.

(c) Strain relief. The cable assembly shall be secured at the outer end of the conduit terminal to which the strain relief is swaged, and the specified load of 50 pounds (222 N) applied to the strain relief parallel to the cable axis. Any means of applying the load that does not augment the holding strength of the swaging may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

4.8.2.2 Friction loss. Test for friction loss shall be as specified on Drawing 11-1-2061.

4.8.2.3 Critical dimensions. The 2 (51 mm) and 2-29/32 (74 mm) inch dimensions at the adjusting color end of the cable shall be measured with the terminal at the opposite end set at the 3.000 inch (76 mm) dimension as specified on Drawing 11-1-2061. The cable assembly shall be rigged as specified in 4.8.2.1 (a) except that the load shall be 10 pounds (45 N).

The 2-29/32 inch (74 mm) dimension may be reset to compensate for any minor permanent set that may result in cable assemblies proofloaded as specified herein. The inspection level shall be III with an acceptable quality level (AQL) of 0.10.

4.8.2.4 Dimensional examination. Examination shall be made of the end item for defects in dimensions except as otherwise specified herein. Any dimension not within tolerances specified shall be classified as a defect. The inspection level shall be S-2 and the AQL 4.0, expressed in terms of defects per hundred units.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each coupling assembly, consisting of the components specified for the particular part number ordered (see 6.2), shall be unit and intermediate packaged as specified herein.

5.1.1.1 Unit packaging.

5.1.1.1.1 Cable assemblies. Each cable assembly shall be coiled in a 12 inch (305 mm) (circular or oval) minimum diameter coil and then secured with cotton tape or twine or by means of pressure-sensitive tape at a minimum of three equally spaced positions along the circumference of the coil. The ends of each cable assembly shall be completely wrapped with kraft paper and then overwrapped with cellulosic cushioning material. The wrapped ends of each cable assembly shall be secured in place with pressure-sensitive tape.

5.1.1.1.2 All coupling assembly components, except cable assemblies. Each coupling assembly component, except cable assemblies, shall be unit packaged in a close-fitting box conforming to variety 1, style III, type G, class i of PPP-B-566; type I, variety 1, class A, style 4 of PPP-B-676; or style optional, type CF, (variety SW) class domestic, grade 175 of PPP-B-636. Each box shall be securely closed with 2-inch (51 mm) minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

5.1.1.2 Intermediate packaging. One complete coupling assembly, unit packaged as specified in 5.1.1.1, shall be packaged in a snug-fitting fiberboard box conforming to style RSC, grade W5c of PPP-B-636. The unit packaged items shall be compactly arranged within the box with the cable assembly on top. The box shall be closed and waterproofed with tape in accordance with method IV as specified in the appendix of PPP-B-636.

5.1.1.3 Separate procurement of cable assemblies (see 6.2). When cable assemblies are to be procured separately, each cable assembly shall be packaged as specified in 5.1.1.1.1.

5.1.2 Level C. Each complete coupling assembly and separately procured cable assembly (see 6.2) shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing.

5.2.1.1 Coupling assemblies, complete. Four complete coupling assemblies of one part number only, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to overseas type, style A or I, grade A or B, type 2 load of PPP-B-601; or class 2, style 2 or 4, type 2 load of PPP-B-621, as specified (see 6.2). Each shipping container shall be closed and reinforced in accordance with the appendix of the applicable container specification.

5.2.1.2 Separate procurement of cable assemblies (see 6.2). Cable assemblies of one part number only, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC-L, grade V2s of PPP-B-636; overseas type, style A or I, grade A or B, type 2 load of PPP-B-601; or class 2, style 2 or 4, type 2 load of PPP-B-621, as specified (see 6.2). The inside of each fiberboard container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each fiberboard container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636. Each wood container shall be closed and reinforced in accordance with the appendix of the applicable container specification; and be weather-proofed with a sealed case liner conforming to type I or II, grade E of MIL-L-10547. The weight of the contents of each fiberboard container shall not exceed 65 pounds (30 kg) and for each wood container shall not exceed 150 pounds (68 kg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing.

5.2.2.1 Coupling assemblies, complete. Four complete coupling assemblies of one part number only, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to domestic type, style A or I, grade B, type 2 load of PPP-B-601; or class 1, style 2 or 4, type 2 load of PPP-B-621, as specified (see 6.2). Each shipping container shall be closed and reinforced in accordance with the appendix of the applicable container specification.

5.2.2.2 Separate procurement of cable assemblies (see 6.2). Cable assemblies of one part number only, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636; domestic type, style A or I, grade B, type 2 load of PPP-B-601; or class 1, style 2 or 4, type 2 load of PPP-B-621, as specified (see 6.2). The inside of each fiberboard container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Each fiberboard container shall be closed in accordance with the appendix of the applicable container specification. The weight of the contents of each fiberboard container shall not exceed 65 pounds (30 kg) and for each wood container shall not exceed 150 pounds (68 kg).

5.2.2.2.1 Weather-resistant shipping container. When specified (see 6.2), the fiberboard shipping container specified in 5.2.2.2 shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method IV as specified in the appendix of the container specification.

5.2.3 Commercial. Coupling assemblies, complete and separately procured cable assemblies (see 6.2), packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Palletization. When specified (see 6.2), complete coupling assemblies and separately procured cable assemblies of one part number only, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129. Each cable assembly shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

6.1 Intended use. The coupling system covered by this specification is used in airdrop of cargo loads to effect transfer of the extraction parachute system force from the function of extracting the load from the aircraft, to that of deployment of the recovery parachute system.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article. When a first article is required (see 3.1, 4.3, and 6.3).
(c) Part number of the coupling assembly required (see 3.2).
(d) Part number of the cable assembly required when procured separately (see Drawing 11-1-2061).
(e) Selection of the applicable levels of packaging and packing for coupling assemblies, or cable assemblies when procured separately (see 5.1 and 5.2).
(f) Type of shipping container desired for level A or B packing for coupling assemblies, or cable assemblies when procured separately (see 5.2.1.1, 5.2.1.2, 5.2.2.1 and 5.2.2.2).
(g) When weather-resistant grade fiberboard shipping containers are required for level B packing of separately procured cable assemblies (see 5.2.2.2.1).
(h) When palletization is required (see 5.3).
(i) Length of cable required (see 1.2)

6.3 First article. When a first article is required it shall be inspected and approved under appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample consisting of one unit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

6.6 Metric equivalents. Metric equivalents indicated in parentheses throughout this document are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard For Metric Practice and are for information only. In each instance, the value stated in US customary units shall be controlling.

6.7 Conduct of tests. The contractors shall observe reasonable precautions during conduct of high release and proofload tests to prevent injury to personnel performing the witnessing testing.

Custodian:

Army - GL

Review activity:


Army - AV

Preparing activity:

Army - GL

Project No. 1670-A606

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

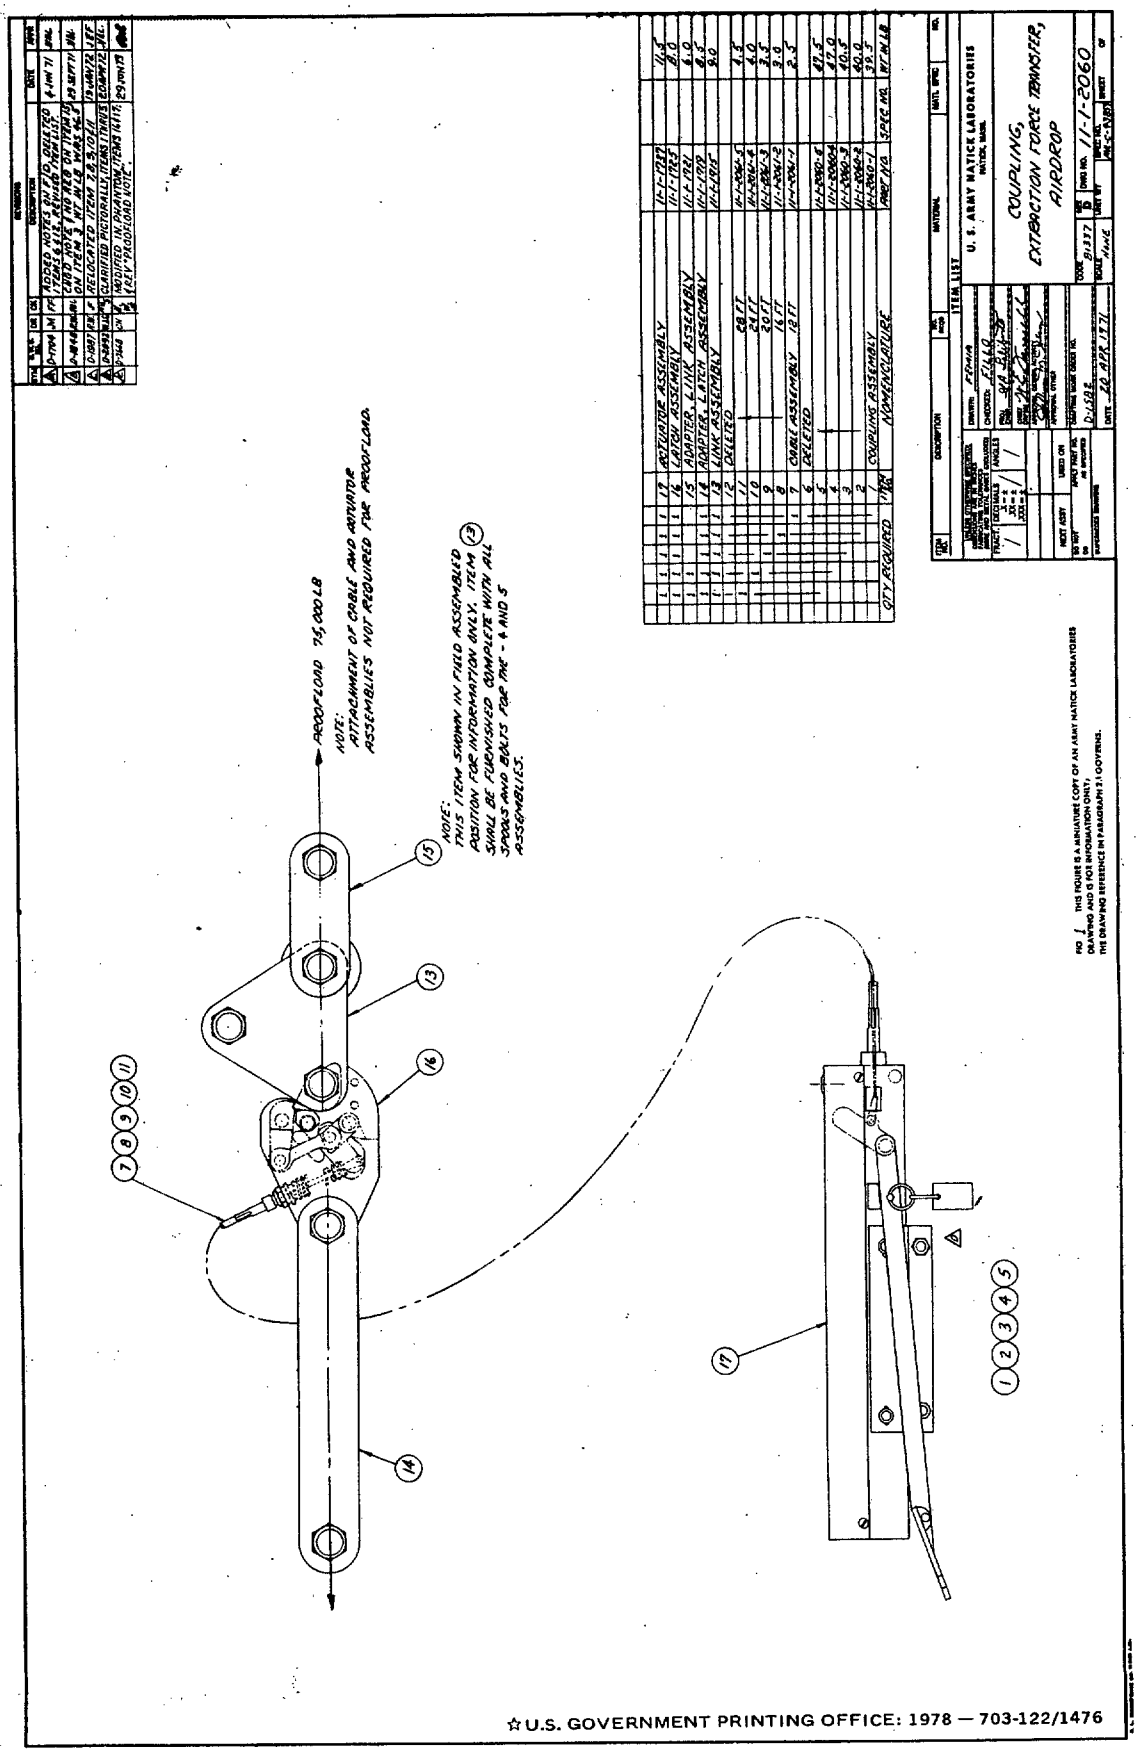

☆U.S. GOVERNMENT PRINTING OFFICE: 1978 — 703-122/1476

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-43859A(GL)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:38Z
Check the source to verify that this is the current version before use.