MIL-T-43853B(GL)
27 April 1978
SUPERSEDING
MIL-T-43853A(GL)
7 March 1975

MILITARY SPECIFICATION

TROUSERS, MEN'S, ARMY TAN 445, DURABLE PRESS

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers polyester/cotton and polyester/rayon durable press trousers.

1.2 Classification. The trousers shall be one type in the following classes and sizes as specified (see 6.2):

Class 1 - Polyester/Cotton
Class 2 - Polyester/Rayon

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: US Army Natick Research and Development Command, Natick MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

Schedule of sizes
(Finished bottoms)

	Inseam	Waist
X-Short	27	25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40
	28	26 27 28 29 30 31 32 33 34 35 36 37 38 39 40
Short	29	25 26 27 28 29 30 31 32 33 34 35 36 37 38 30 40 42
	30	26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 42
Regular	31	25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 42 44
	32	26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 42 44
Long	33	26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 42 44 46 48
	34	26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 42 44 46 48
X-Long	35	26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 42 44 46
XX-Long	36	30 32 34 36 38 40 42 44
	37	30 32 34 36 38 40 42 44

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871 - Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106 - Fasteners, Slide, Interlocking
V-T-280 - Thread, Gimp, Cotton, Buttonhole
UU-P-268 - Paper, Kraft, Wrapping
DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548 - Thread, Polyester, Cotton-covered
MIL-T-43624 - Thread, Polyester, Spun
MIL-C-43718 - Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon
MIL-C-43763 - Cloth, Tropical, Polyester/Rayon (Durable Press)
MIL-C-43791 - Cloth, Twill, Polyester/Cotton (Durable Press)

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1488 - Provisions for Evaluating Quality of Trousers

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 12215, Durham, NC 27709.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee. Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

TEXTILE COLOR CARD ASSOCIATION

Standard Color Card of America, 9th Edition

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material for class 1 trousers shall be polyester/cotton twill cloth, Army Tan 445, conforming to type I, of MIL-C-43791. The material for the class 2 trousers shall be polyester-rayon tropical cloth, Army Tan 445, conforming to MIL-C-43763.

3.2.2 Pocketing, waistband lining, right fly lining, and crotch pieces. The material for the pocketing, waistband lining, right fly lining and crotch pieces shall be white, cotton/polyester cloth conforming to class 1 of MIL-C-43718. The test for nonfibrous content shall apply to the cloth prior to application of durable press treatment only. The material shall be given an approved (see 6.8) durable press treatment, consisting of a suitable catalyzed and cured system. Hand modifiers and a wetting agent may be used to facilitate processing. Durable press resins other than those approved for use are prohibited. Testing shall be as specified in 4.2.1.

3.2.3 Left fly interlining. The material for the left fly interlining shall be bleached or unbleached cotton tobacco cloth, with a non-permanent sizing conforming to the following requirements when tested as specified in 4.2.1.

Warp (min)	-	26 ends per inch (10 ends/cm)
Filling (min)	-	22 picks per inch (9 picks/cm)
Weight (min)	-	3.5 ounces per square yard (119 g/m^2)

3.2.4 Waistband interlining. The material for waistband interlining shall be a bleached or unbleached cotton/polyester cloth containing not less than 45 percent polyester fiber, or a cotton buckram. Each shall conform to the requirements listed below, when tested as specified in 4.2.1. The material shall be given an approved (see 6.8) durable press treatment, consisting of a suitable catalyzed and cured system. Hand modifiers and a wetting agent may be used to facilitate processing. Durable press resins other than those approved for use are prohibited.

Weave	-	Plain
Warp (min)	-	48 ends per inch (19 ends/cm)
Filling (min)	-	40 picks per inch (16 picks/cm)
Weight (min)	-	3.5 ounces per square yard (119 g/m^2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

3.2.5 Threaaming, stitching, buttonholes, and button sewing shall bester thread, ticket Nos. 50, 2-ply and 70, 2-ply, conformr spun polyester, sizes 40, 3-ply and 70, 2- or 3-ply, cor 2 of MIL-T-43624. When spun polyester thread is used be used where size 50 is specified in table II and 70, 2 o: where size 70 is specified in table II.

3.2.5.1 Col: The color of the thread for all stitching, except stitchistbanding, fly lining, and labels, shall be Tan G, C.A. 66t show colorfastness to laundering, perspiration, : better than the standard sample. When no standard samplved thread shall show "good" fastness to laundering, pe: The thread for stitching the pocketing, waistbanding, : stitching shall be White AH, C.A. 66050.

3.2.6 Gimp. reinforcing the buttonholes shall conform to type I or I280. The color shall be Tan G, C.A. 66036.

3.2.7 Buttoi conform to type II, class D, style 4, 22-line of V-B: be shade Tan AJ, Cable 62028.

3.2.8 Slide fastener shall be type I, style 1, with cam lock, shortass or nickel chain and slider, conforming to V-F-106. Ttener shall not shrink more than 2 percent.

3.2.8.1 Slic slide fastener tape shall be woven from yarns made of either cotton/nylon or cotton/polyester in both the warp : color of the tape shall be Army Tan 445 for the trousers. show colorfastness to laundering equal to or better than thnen no standard sample is available, the tape shall show "goering. The tapes shall be given an approved (see 6.8) durabonsisting of a suitable catalyzed and cured system. Hand ng agent may be used to facilitate processing. Durable press se approved for use are prohibited. Testing shall be as sp:

3.2.9 Labelsers shall have a size and a combination identification-nforming to type I of DDD-L-20 except that the combinatioruction label cloth shall be dyed Lemon Yellow, Cable No. 7020! the Standard Color Card of America. The fastness to la: shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

3.2.9.1 Size label. The size label shall conform to class 2.

* 3.2.9.2 Combination label. The combination identification-instruction label shall conform to classes 1 and 3 combined and shall contain the following instructions:

TROUSERS, MEN'S, ARMY TAN 445, DURABLE PRESS
Washing Instructions

1. Machine Washing: Use Wash and Wear or Permanent Press cycle. Wash with warm water 120°F (49°C) using mild non-phosphate synthetic detergent. DO NOT overload the washer (2/3 capacity) and wash alone without colored all cotton items. Heavy stains, may require presoaking or prespotting.

2. Hand Washing: Wash in warm water, using mild non-phosphate synthetic detergent. (Rinse in clear, warm water.) DO NOT WRING OR TWIST.

3. Do Not Starch or Use Chlorine Bleach.

4. Drying. Tumble dry at Wash and Wear or Permanent Press cycle. Do not overload dryer (2/3 capacity). Remove immediately at end of drying. Shape and hang on rust proof hangers. To drip dry, remove from water before last spin cycle. Shape and hang on rust proof hangers.

5. If touch-up is required, iron at synthetic heat setting.

DO NOT REMOVE THIS LABEL

3.2.10 Hook and eye. The hook and eye shall be North and Judd (Hook Flex H-49, K-50, H-89, and E-90); Universal Button Co. (Talon #3, #7, and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536, D-4086, D-4457, D-4288); Rau (OA50, OX 1256, 080415); Patwin, Inc. (Slim-Slak with MB eye, and Slik-Slak) or equal. The finish shall be nickel plate and the crush-proof type hook and eye shall be used. Prior to the use of an "or equal" item, the contractor shall submit the item with supporting data to the contracting officer for approval (see 4.1.1).

3.3 End item appearance.

3.3.1 Appearance and soil release ratings. The finished cured trousers, after five washings, shall meet the ratings for the characteristics specified below when tested as specified in 4.2.3.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

Characteristic	Rating
Cloth appearance	4
Crease appearance:	
Front	4
Back	4
Seam appearance (minimum individual rating):	
Inseam	3
Outseam	3
Seat seam	3
Back pocket	3
Side pocket	3
Waist	3
Fly appearance (minimum individual rating)	3
Soil release (minimum individual rating)	3

3.3.2 Shade. The shade of the finished cured trousers shall match the standard sample when tested as specified in 4.2.3.

3.4 Tearing strength of finished cured trousers. The finished cured trousers shall meet the following tearing strength requirements when tested as specified in 4.2.3:

Trousers	Tearing strength, minimum			
	Warp		Filling	
	Pounds	(newtons)	Pounds	(newtons)
Class 1	5.0	(22)	3.0	(13)
Class 2	6.0	(27)	4.0	(18)

3.5 Design. The trousers are dress type with a sew-on waistband with hook and eye closure, a slide fastener french fly, straight side pockets, and double cord hip pockets. The left hip pocket is buttoned with a buttonhole tab.

3.6 Figure. Figure 1 is furnished for information only. To the extent of any inconsistencies between the written specification and the figure, the specification shall control.

3.7 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. Except as allowed by footnote to table I, the working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 1/4 inch (6 mm) seam allowance for bagging pockets and a 3/8 inch (10 mm) seam allowance for all other seams except seat seam; 7/8 inch (22 mm) has been added to the seat seam allowances (total 1-1/4 inches (32 mm) at top) to allow for tapering the seat outlet.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the currentversion before use.

3.7.1 Pattern parts. The component parts of the trousers shall be cut from materials as specified in accordance with the number of parts indicated in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Basic material	Front	2
	Back	2
	Flies (one right and one left)	2
	Right fly with integrated tab (optional)	1
	Side pocket wide facing (or bearer)	2
	Side pocket narrow facing	2
	Hip pocket bearer	2
	Hip pocket cord	2
	Waistband (one right and one left)	2
	Right waistband for use with integrated tab (optional)	1
	Fly tab	2
Cotton/polyester (see 3.2.2)	Right fly lining 1/	1
	Right fly lining with integrated tab (optional) 1/	1
	Crotch lining	2
	Side pocket stay	2
	Side pocket	2
	Hip pocket	2
Tobacco cloth	Left fly interlining	1

NOTE: Patterns are not furnished for belt loops, buttonhole tab, waistband lining and waistband interlining. See table II, operation 2 for their requirements.

1/ The right front end of the waistband lining may extend to the front opening. When this optional construction is used, the right fly lining shall be shortened at the top. The altered right fly lining must be sufficiently long to extend under the waistband lining.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

3.8 Construction.

3.8.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Whenever two or more seam or stitch types are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper thread shall be on the inside of the trousers. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result (see 6.4 and 6.5). All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Edge stitching and top stitching shall be uniformly gaged throughout the garment. Seams required to be worked out, that have a depth between the fold of 1/16 inch (1.5 mm) or more shall be considered a defect. The guides and knives for the overedge machines shall be set to trim only the ravelled edges of the fabric.

3.8.2 Thread breaks and ends of seam. Ends of all seams and stitchings produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch (6 mm). Ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch (13 mm). The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (13 mm). Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type.

3.8.3 Stitches per inch (stitches/cm). The minimum and maximum number of stitches per inch (stitches/cm) shall be as specified in table II.

3.8.4 Buttonhole. Buttonholes shall be the eyelet-end-taper-bar type, or eyelet-end, square-bar type, worked over gimp with the end securely tacked. The finished cut length shall be 1/2 to 5/8 inch (13 to 16 mm). The eyelet-end, square-bar type, when applicable, shall be bartacked with 21 stitches per tack in a separate operation. The bar at end of the taper-bar type buttonhole shall have a minimum of four stitches not counting the first cross-over stitch.

3.9 Manufacturing operations requirements. The trousers shall be manufactured in accordance with all operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations, with the exception of operations 32 and 33 which shall be performed in the sequence listed. Any basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished trousers.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the currentversion before use.

3.9.1 Marking. The component parts of the trousers shall be marked to insure a uniform shade and size throughout the trousers. Any method of marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on type tickets.
c. Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Spread the material without tension. The cut parts from the top and bottom ply shall match and correspond to the pattern. b. Cut trousers in accordance with patterns furnished which show directional lines, size, placement of pockets, and notches for proper assembling of all parts. Directional lines shall be placed in the warp direction. c. Directional lines on the fronts and backs may vary from the warp direction by not more than 1 inch (25 mm). Measurements shall be taken at the top and bottom edges of the pattern from the directional line to the selvage edge of the fabric and the difference between the two measurements shall not exceed 1 inch (25 mm). d. Cut all parts of the trouser from the same piece of basic material except narrow facings for side pockets, hip pocket bearers, belt loops, fly tab pieces and fly pieces (right and left) which may be cut from ends. Parts cut from ends shall approximate the shade of the other parts. e. Cut the stripping for belt loops of sufficient width to comply with operation 7.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES, PER (1) INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Cut linings and interlinings. a. Cut the right fly lining on the straight or on the bias. b. Cut left fly interlining and stays for side pockets in the warp or filling direction. c. Cut crotch lining pieces so that the fold will be on the bias and one of the inseam sides is in the direction of the warp. d. Cut the waistband linings and interlinings on the bias and sufficiently wide to comply with operation 19. - or - e. The waistband linings may be commercial type using the materials specified.						
3.	Cut pockets. Cut pocketing in the warp or filling direction. Cut as many as possible in the warp direction.						
4.	Marking. Mark or ticket all component parts of the trousers, except parts cut from ends, to insure correct size and uniform shade throughout the trousers.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
5.	Replacement of defective damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages as specified in MIL-STD-1488 are excluded and replaced with non-defective and properly matched material.						
*6.	Overedge stitching.						
	a. Overedge stitch raw edges of inseams, leg bottoms, outseams (from lower side pocket notch to bottom of trousers), crotch seam on the left front, seat seams, and the left end of the waistband. The crotch linings folded in half lengthwise may be caught in the stitching along crotch seams and forepart (see operation 6b). The side pocket stay pieces, with the bottom ends turned under, may be caught in the overedge stitching of the outseams (see operation 16).	502 or 503 or 504	EFd-1 EFd-1 EFd-1	6-10 6-10 6-10	70-2 70-2 70-2	70-2 70-2 70-2	
	b. The crotch linings may be stitched to the foreparts in a separate operation.	301	SSa-1	6-10	50-2	50-2	
	c. The right front shall be overedged from bottom of crotch to the top of waist.	502 or 503	EFd-1 EFd-1	6-10 6-10	70-2 70-2	70-2 70-2	
7.	Make stripping (see operation 1e) for buttonhole tab and belt loops.						
	a. Fold stripping with both edges turned in and the turned-in edges abutted at center and stitch with the covering stitch in the underside. The stripping shall finish 5/16 to 3/8 inch (8 to 10 mm) in width for the buttonhole tab and 5/8 to 3/4 inch (16 to 19 mm) in width for the belt loop.	105 or 406	EFae-1 EFh-1	12-16 10-14	70-2 70-2	70-2 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER (1) INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make stripping (see operation 1e) for buttonhole tab and belt loops. (cont'd)						
	- or -						
	b. Turn in one side of stripping, fold stripping with the turned-in edge overlapping on the raw edge at center, and stitch with a covering stitch. The stripping shall finish 5/16 to 3/8 inch (8 to 10 mm) in width for the buttonhole tab and 5/8 to 3/4 inch (16 to 19 mm) for the belt loop width.	105	---	12-16	70-2	70-2	
8.	Make hip pocket buttonhole tab.						
	a. Cut a piece of stripping (see operation 7) of sufficient length to comply with operation 8b below and to finish 1-1/4 ± 1/8 inches (32 ± 3 mm) long when attached to the left hip pocket.						
	b. Fold the piece in half and abut the side edges forming a point. Bartack across the abutted edges at pointed end catching the base of the triangle. Place a second bartack across the abutted edges 5/8 ± 1/16 inch (8 ± 1.5 mm) from the first bartack, forming a slit buttonhole. The bartacks shall be 3/8 to 1/2 inch (10 to 13 mm) in length.	Bartack or	---	28 per bartack	50-2	50-2	
		Automatic loop tacker	---	24-28 per tack	50-2	50-2	
9.	Make fly tab (applicable if separate tab piece is used).						
	a. Stitch the two fly tab pieces together along the sides and the pointed end, trim corners and point, turn, force out points and edges, and edge stitch 1/16 to 1/8 inch (1.5 to 3 mm) from edge.	301 or	SSe-2(a)	10-14	50-2	50-2	
		401 and	SSe-2(a)	10-14	50-2	70-2	
		301	SSe-2(b)	10-14	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
9.	Make fly tab (applicable if separate tab piece is used). (cont'd)						
	b. Make buttonhole at pointed end of tab as indicated by pattern, with the inside edge of the eyelet 5/8 to 3/4 inch (6 to 19 mm) from point. The purling shall face the wearer on the finished trousers.	Buttonhole	---	52-54 per buttonhole including tack	50-2	50-2	
*10.	Make flies.						
	a. Superimpose the left fly on left fly interlining. Stitch back edge of fastener tape to left fly with two rows of stitching. The end of the scoops shall be 1/4 to 1/2 inch (6 to 13 mm) above the fly notch when fasteners are cut and scoops removed. When the trousers are finished, the edge of the chain shall be 1/2 to 5/8 inch (13 to 16 mm) from edge at top, tapering to 1/4 to 3/8 inch (6 to 10 mm) from edge at bottom.	301 or 401	LSbj-2 LSbj-2	10-14 10-14	50-2 50-2	50-2 70-2	
	b. After fastener is cut and the scoops removed, stitch the fastener tape to back edge of right fly, with bottom end of scoops 1/4 to 1/2 inch (6 to 13 mm) above the fly notch.	301	SSa-1	10-14	50-2	50-2	
	- or -						
	Overedge right fly catching slide fastener tape in operation. (Knife must be removed when performing this operation).	503 or 504	SSa-1 SSa-1	6-10 6-10	70-2 70-2	70-2 70-2	
	c. (Applicable if separate tab pieces are used) - With the fly tab positioned 3/8 to 3/4 inch (10 to 19 mm) from the top raw edge of right fly, seam the fly lining to the front edge of the right fly to within 1 ± 1/4 inches (25 ± 6 mm) from top of fly	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-2 50-2	50-2 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER (1/) INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*10.	Make flies. (cont'd)						
	inclosing the fly tab between the two plies. On the finished trousers, the fly, fly tab, and waistband shall lie smooth and flat when fly tab is buttoned.						
	d. If option to use front fly with integrated fly tab is exercised, seam lining to the front edge of right fly to within 1 ± 1/4 inches (25 ± 6 mm) from top of fly.	301 or	SSe-2(a)	10-14	50-2	50-2	
		401	SSe-2(a)	10-14	50-2	70-2	
	e. Overedge the back edge of the left fly and interlining.	503 or	SSa-1	6-10	70-2	70-2	
		504	SSa-1	6-10	70-2	70-2	
11.	Make darts.						
	Fold and stitch darts as indicated on pattern. Turn folded edge of dart on inside of trousers toward the seat seam. The lower end of the dart shall finish in the hip pocket opening.	301	OSf-1	10-14	50-2	50-2	
12.	Make hip pockets and attach combination label.						
	Finished appearance. The pockets shall be in alignment, uniform in width and depth and shall finish 5-3/4 to 6-1/4 inches (146 to 159 mm) deep. There shall be no raw edges or pleats at the end of the openings. The pocket opening shall finish 5-1/4 ± 1/8 inch (133 ± 3 mm) long.						
	a. Position the combination label on the right hip pocketing so that on the finished trousers the label will face the wearer, be centered (± 1/2 inch (13 mm) tolerance) on pocket, and have the top edge 1 to 1-1/2 inches (25 to 38 mm) below the bearer. Stitch on all four sides. The stitching shall not be through the printing.	301	LSbj-1	10-14	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (C. 11)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make hip pockets and attach combination label. (cont'd)						
	b. Turn in lower raw edge of bearer and seam to pocket at notches. When the bearer piece is cut on the selvage, the edge need not be turned in.	301	LSd-1	10-14	50-2	50-2	
	c. Position cord facing piece on outside of trousers as indicated on pattern with the pocketing placed on the underside (as indicated by solid line on pattern), and stitch to trousers through pocketing with two rows of stitching.	301	---	10-14	50-2	50-2	
	d. Cut opening between rows of stitching through all plies simultaneously, turn lower part of facing through the cut opening, and raise stitch forming a 1/8 to 3/16 inch (3 to 5 mm) cord edge.	301	---	10-14	50-2	50-2	
	e. Turn in raw edge of cord facing piece and seam to pocketing. When cord facing piece is cut on the selvage, the edge need not be turned in.	301	LSd-1	10-14	50-2	50-2	
	f. Fold pocketing, seam the sides, and turn to finished position.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-2 50-2	50-2 70-2	
	g. Smooth out pocketing and single stitch 3/16 to 1/4 inch (5 to 6 mm) from edge. The stitching may extend across the bottom folded edge.	301	SSe-2(b) and Osf-1	10-14 10-14	50-2 50-2	50-2 50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make hip pockets and attach combination label. (cont'd)						
	h. Form a 1/8 to 3/16 inch (3 to 5 mm) cord of the facing on the upper edge of pocket opening, insert buttonhole tab at center (1/4 inch (6 mm) off center tolerance) on left hip pocket, and raise stitch the seam through the trousers, cord facing piece, pocket bearer, and pocketing, closing the top of pocket.	301	---	10-14	50-2	50-2	
	i. Tack ends of pocket opening 1/4 to 3/8 inch (6 to 10 mm) through cord, bearer, and pocketing.	301	---	10-14	50-2	50-2	
	- or -						
	j. Operations 12c and d above may be accomplished with a double piped pocket machine which stitches, cuts, and turns piped edges in one operation. When this machine is used, the welt piece may be modified to permit insertion into the machine and the machine manufacturer's recommended pocket-stay material may be used.	101	---	10-14	50-2	50-2	
	- and -						
	k. Raise stitch the joining seam of lower piping piece through back of trousers and piping piece only; raise stitch the joining seam of the top piping piece through all plies closing the top of pocket. The ends of the pocket openings shall be securely tacked.	301	---	10-14	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER CM/INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make hip pockets and attach combination label. (cont'd)						
	1. Sew a button through the left hip pocket and pocket facing to correspond to the eyelet end of the buttonhole on the tab.	301 or	---	14-16 per button	50-2	50-2	
		101 or		14-16 per button	50-2		
		Hand	---	4 double per button	50-2		
13.	Make side pockets.						
	Place facing and bearer on pocketing and stitch along the inner side, with the raw edge turned in, and across the lower end. A selvage edge need not be turned in.	301	LSd-1 and	10-14	50-2	50-2	
		301	LSbj-1	10-14	50-2	50-2	
14.	Attach side pockets.						
	Finished appearance. The edges of the pocket opening shall not be distorted. The openings shall be aligned, uniform in length, and shall measure not less than 5-3/4 inches (146 mm) or more than 6-1/2 inches (165 mm) between tacks. Avoid notching the pocket on underside beyond the width of the side seam allowance.						
	a. Seam side pocket to front, as indicated by marks on pattern. Notch for pocket opening, turn to finished position with the seam to the back of the front edge, and stitch 3/16 to 1/4 inch (5 to 6 mm) from edge, starting at the top of pocket opening.	301	SSe-2	10-14	50-2	50-2	
	b. Fold pocket right-side-out and stitch from step to folded edge of pocketing. Notch pocket and facing at top of step and turn pocket.	301 or	SSae-2(a)	10-14	50-2	50-2	
		401	SSae-2(a)	10-14	50-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Attach side pockets. (cont'd)						
	c. Tack the ends of the openings to the bearer with 1/4 to 3/8 inch (6 to 10 mm) tacks. The right and left pocket openings shall not be out of alignment by more than 1/2 inch (13 mm).	301	---	10-14	50-2	50-2	
15.	Sew on flies.						
	Finished appearance. The ends of the flies shall be even where they join the crotch seam. The fly shall lie flat without twists or puckers when fastener is closed.						
	a. Sew on right fly (slide fastener and fly tab, if separate pieces, attached) with notches matched.	301	SSa-1	10-14	50-2	50-2	
	b. Sew on left fly (slide fastener attached) with notches matched. Turn fly to inside with the seam 1/16 to 1/8 inch (1.5 to 3 mm) back of folded edge and press front edge without damage to the fastener.	301	SSa-1	10-14	50-2	50-2	
	- or -						
	c. Sew on left fly (slide fastener attached) with notches matching; turn, and raise stitch fly 1/16 to 3/32 inch (1.5 to 2.5 mm) from turned edge. Turn fly to inside with the seam line 1/16 to 1/8 inch	301 or 401 and 301	LSq-2(a) LSq-2(b)	10-14 10-14	50-2 50-2 50-2	50-2 70-2 50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Join outseams.						
	a. Join outseams with the notches matched, catching the pocket stay piece with the bottom ends turned under, if not previously caught in the overedge operation (see operation 6a).	301 or 401	SSa-1 SSa-1	10-14 10-14	50-2 50-2	50-2 70-2	
	b. Press outseams open from bottom to top of trousers. The pocket stay pieces may be folded over the open seam and pressed into position for operation 17.						
17.	Finish side pockets.						
	Turn in back edge of side pockets and the edge of stay pieces and stitch to stay pieces 3/16 to 1/4 inch (5 to 6 mm) from edge along the side seam allowances. Continue the stitching around pocket to folded edge and securely backstitch end of seam.	301 301	SSc-1 SSe-2(b)	10-14 10-14	50-2 50-2	50-2 50-2	
18.	Attach waistband and set belt loops.						
	Finished appearance. The finished waistband shall measure 1-1/2 ± 1/8 inches (38 ± 3 mm) wide. There shall be seven loops for sizes up to and including 37 and eight loops for sizes 38 and up. The loops shall be positioned as follows: One on each front, as indicated by patterns. One at each outseam on back. One centered between outseam and seat seam on each back. One on seat seam (see operation 27a and b). The extra loop for larger sizes on right front 1-1/4 to 1-3/4 inches (32 to 44 mm) from right fly joining seam (measurement taken from front edge of loop).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Attach waistband and set belt loops. (cont'd)						
	a. Stitch right and left waistbands to trousers catching the ends of belt loops (except center back loop, see operations 27a and b) in the stitching.	401	SSa-1	10-14	50-2	70-2	
	b. Press waistband seams open. Seam allowance may be pressed up.						
	c. Lay the top ends of pocketing smooth and flat in their finished positions and join pocketing to seam allowance. When waist seam allowance is pressed open, join pocketing to seam allowance of waistband only.	301	LSbj-1	10-14	50-2	50-2	
	NOTE: The waistband lining may be attached to the waistband (operation 19) prior to setting to trousers.						
19.	Make and join waistband linings.						
	Finished appearance. The waistband lining shall measure not less than 2 inches (51 mm) wide in the finished trousers. The waistband linings may be pieced providing the seam is flat and there is not more than one piecing in each trouser.						
	a. Overlap the lining on the interlining 1 inch (25 mm) (see operation 2d) and stitch 1/8 to 3/16 inch (3 to 5 mm) from edge of lining. Fold lining over interlining and press.	101 or	LSa-1	6-10	50-2		
		301 or	LSa-1	6-10	50-2	50-2	
		401	LSa-1	6-10	50-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Make and join waistband linings. (cont'd)						
	b. A commercial waistband conforming to specified requirements may be used (see operation 2e).						
	c. Turn under top edge of waistband lining and stitch to top edge of waistband catching interlining and the top of the belt loops with a row of simulated hand felling. Waistband lining may be turned under and felled by hand. The belt loops shall lie flat and shall not deviate from the straight by more than 3/16 inch (5 mm).	304 or	---	10-14	50-2	50-2	
		404 or	---	10-14	50-2	50-2	
		401 or	---	10-14	50-2	70-2	
		Hand	---	6-8	50-2		
	d. Tack the tops of the belt loops to the waistband through waistband but not through waistband lining. The bartacks shall not be visible on the outside of the trousers when waistband lining is folded to the inside. The tacks shall extend the width of the loops.	301 or	---	12-16	50-2	50-2	
		Bartack or	---	28 per bartack	50-2	50-2	
		Automatic loop tacker	---	24-28 per tack	50-2	50-2	
	e. (Applicable when option to extend waistband lining to right end of waistband is exercised). Turn right end of waistband lining to the outside and stitch to front edge of waistband catching the top of the fly lining in the stitching.	301 or	SSe-2(a)	10-14	50-2	50-2	
		401	SSe-2(a)	10-14	50-2	70-2	
	f. Fold waistband lining to the inside and baste or press top edge. The lining shall not be exposed beyond the top of waistband.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach hooks and eyes.						
	a. Position the hook on the center (1/4 inch (6 mm) off center tolerance) of the left waistband with the rolled edge of the hook aligned with the slide fastener scoops. Attach through a suitable reinforcement.						
	b. Position the eye on the center of the right waistband, aligned with the slide fastener scoops, to correspond to the hook on left waistband. Attach through a suitable reinforcement.						
	NOTE: When the hook and eye is engaged, on the finished trousers, the closure shall not bulge, pucker, or twist.						
21.	Finish right and left flies.						
	Finished appearance. The top corners of the right (when applicable) and left flies shall be completely forced out and shall not be bulky. The stitching of the left fly shall be uniformly spaced from edge of fly. The seam joining the left fly to the forepart shall not be exposed on outside of trousers, when fastener is closed. The right fly lining shall not be exposed on outside. The flies shall be smooth without twists, puckers, or excessive fullness.						
	a. Continue the stitching of the fly lining to the top of the waistband.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50-2 50-2	50-2 70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Finish right and left flies. (cont'd)						
	b. Turn right fly lining to the inside and stitch 1/16 to 1/8 inch (1.5 to 3 mm) from front edge. Turn in fly lining at top of waistband and continue the stitching across top; turn in raw edge of fly lining and raise stitch the fly joining seam catching the fly lining in the stitching. The edge stitching along front edge of fly may be accomplished in a separate operation.	301 301 301	SSe-2(b) and SSc-1 and LSq-2(b) shows finished seams	10-14 10-14 10-14	50-2 50-2 50-2	50-2 50-2 50-2	
	c. (Applicable when option to extend waistband lining to right end of waistband is exercised). Turn right fly lining to the inside and stitch 1/16 to 1/8 inch (1.5 to 3 mm) from front edge; continue the stitching along front end of waistband, across top of waistband, and down to meet back of right fly; turn in raw edge of fly lining; and raise stitch the fly joining seam catching the fly lining in the stitching.	301 or 301	SSe-2(b) LSq-2(b)	10-14 10-14	50-2 50-2	50-2 50-2	
	d. Turn back end of waistband in line with the front folded edge of left fly and stitch across top of waistband the width of the fly. Trim, turn, and work out corner.	301	SSa-1	10-14	50-2	50-2	
	e. Stitch down left fly with waistband lining smoothly inserted between fly and trouser. The stitching shall be 1-3/8 ± 1/8 inches (35 ± 3 mm) from front edge of fly, extended from top of waistband, and curved to fly notch.	301	---	10-14	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (1/)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Join inseams.						
	a. Join inseams. The seam shall start and finish evenly and the notches shall match.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-2 50-2	50-2 70-2	
	b. Press inseams open.						
*23.	Join seat seams.						
	Finished appearance. The seat shall be joined with stitch tension of sufficient elasticity to meet strain encountered in sitting or stooping. In the joining of the seat seam, the inseams shall meet and the right and left waistband joining seams shall be aligned. The base of the left fly shall cover the right fly on outside of the finished trousers.						
	a. Join seat seam from base of fly to end of waistband lining with a double needle seat seamer with the rows of stitching 1/64 to 1/32 inch (0.4 to 0.8 mm) apart.	401	SSa-2	7-10 each needle	50-2	70-2	
	b. Press crotch and seat seam open. The crotch and seat seam shall be pressed and handled in such a manner that the seams remain open after pressing.						
24.	Finish waistband and attach size label.						
	Finished appearance. The pockets shall finish smooth and flat.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
24.	Finish waistband and attach size label. (cont'd)						
	a. Stitch the top edge of the size label to lower edge of waistband lining above the right hip pocket. The end of the stitching need not be tacked providing the stitching extends at least 1/2 inch (13 mm) beyond each end of the label. The stitching shall not be through the printing.	301	---	10-14	50-2	50-2	
	b. Join bottom edge of waistband lining (catching interlining) to the top edges of pockets with a row of simulated hand felling. The stitching shall terminate 1 to 1-1/2 inches (25 to 38 mm) beyond front edges of front pockets and back edges of hip pockets, or the stitching may continue across the seat seam allowance. When this operation is performed by hand, the stitching may terminate at the front edges of front pockets and back edges of hip pockets provided they are securely tacked.	103 or	---	4-6	50-2		
		105 or	---	4-6	50-2		
		106 or	---	4-6	50-2		
		314 or	---	4-6	50-2	50-2	
		Hand	---	4-6	50-2		
25.	Assemble fasteners. Attach slider and, with the ends of the chain even, staple the fastener together at bottom with the staple overlapping the scoops.						
26.	Stitch right fly extension. Turn in the raw edges of the right fly extension piece and machine stitch or hand fell to each side of the spread open crotch and seat seam.	301 or	SSac-3(b) (c) (d)	10-14	50-2	50-2	
		Hand	SSac-3(b) (c) (d)	6-8	50-2		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH 1/	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
27.	Attach center back belt loop.						
	Finished appearance. The tacking shall extend the width of the loop but not beyond.						
	a. Turn under top end of belt loop; position over seat seam even with top of waistband; and stitch, tack, or bartack to trousers 1/16 to 1/8 inch (1.5 to 3 mm) from folded edge.	301 or	LSd-1	10-14	50-2	50-2	
		Bartack or	LSd-1	28 per bartack	50-2	50-2	
		Automatic loop tacker	LSd-1	24-28 per tack	50-2	50-2	
	b. Turn under bottom end of belt loop and bartack to trousers 1/4 ± 1/8 inch (6 ± 3 mm) below waistband. The opening of the finished loop shall measure 1-1/2 to 1-5/8 inch (38 to 41 mm) between bartacks.	301 or	LSd-1	10-14	50-2	50-2	
		Bartack or	LSd-1	28 per bartack	50-2	50-2	
		Automatic loop tacker	LSd-1	24-28 per tack	50-2	50-2	
28.	Make buttonhole (applicable to fly with integrated fly tab).						
	Make buttonhole at end of tab, as indicated on pattern, with the inside edge of eyelet 5/8 to 3/4 inch (16 to 19 mm) from point. The purling shall face the wearer on the finished trousers.	Buttonhole	---	52-54 per buttonhole	50-2	50-2	
29.	Bartacking.						
	Finished appearance. The bartacks shall be well made and correctly placed to reinforce points of strain as specified. The bartacks at side pocket openings shall extend beyond the outseams 1/16 to 1/8 inch (1.5 to 3 mm). The length shall be 3/8 to 1/2 inch (10 to 13 mm).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Bartacking. (cont'd)						
h	a. Bartack all pockets at ends of pocket openings. The bartacks shall be perpendicular to the openings.	Bartack	---	28 per bartack	50-2	50-2	
	b. Bartack at base of fly at the junction of the crotch seam and fly. The bartacks may be diagonal, in line with the fly stitching, or may be horizontal and shall not extend beyond the crotch seam.	Bartack	---	28 per bartack	50-2	50-2	
30.	Finish trouser bottoms.						
	Turn up bottoms, as indicated on pattern and blind-stitch. The hem shall finish 2-1/4 ± 1/4 inches (57 ± 6 mm).	103 or 106	EF1-1	6-8	70-2		
31.	Cleaning.						
	a. Trim all ends of stitching and remove loose threads.						
	b. Trim ends of center back belt loop to a length of 1/16 to 1/4 inch (1.5 to 6 mm).						
	c. Remove all spots, stains, and visible markings.						
	d. Before folding and packaging, garments must be free of residual fiber particles, lint and dust, or other foreign substance.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER (1") INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
32.	Pressing. **Finished appearance.** The pressing conditions with regards to time, temperature, steaming, head pressure, and application of vacuum shall be adequate to obtain the required results. a. Press the tops, including the fly and pockets. The legs shall be pressed individually. The fly shall be open with the tops separated when pressed. Crease the legs in the center with the seams matching at the bottom and at the kenn. There shall be no variation in the sharpness of the leg creases at front and back parts of legs. The end creases shall not be higher than 1 inch (25 mm) above the junction of the inseams at the crotch, nor more than 2 inches (51 mm) below the junction of the inseams at the crotch. The top of the creases shall not vary between each leg by more than 1 inch (25 mm).						
33.	Curing. The pressed trousers shall be suspended from the bottoms and subjected to dry oven heat. The temperature and time of curing conditions shall be adequate to obtain required results. After curing, the trousers shall be left on the hanger until they have cooled to room temperature.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER (/1/) INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
34.	Mark or gage and sew button. Finished appearance. The button shall be securely sewn and properly aligned with buttonhole. Hand sewn button shall be shank wrapped three times and the ends of the thread shall be securely tacked with not less than two stitches.						
	a. Sew a button on the left waistband lining to correspond with the fly-tab buttonhole. The stitching shall not be visible on the outside of the trousers.	301 or 101 or Hand	--- --- ---	14-16 per button 14-16 per button 4 double per button	50-2 50-2 50-2	50-2	
	1/ Metric equivalents for stitches per inch are as follows: Stitches per inch — Stitches/cm 4 - 6 — 1-1/2 - 2-1/2 6 - 8 — 2-1/2 - 3 6 - 10 — 2-1/2 - 4 7 - 10 — 3 - 4 10 - 14 — 4 - 5-1/2 12 - 16 — 5 - 6						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

3.10 Measurements. The finished trousers shall conform to the measurements shown in table III. The tolerance shall be ± 1/4 inch (± 6 mm) for 1/2 waist, and ± 1/2 inch (± 13 mm) for inseam measurements.

TABLE III. Measurements in inches (mm)

	ODD SIZES							
	25	27	29	31	33	35	37	39
1/2 Waist 1/	12-1/2 (318)	13-1/2 (343)	14-1/2 (368)	15-1/2 (394)	16-1/2 (419)	17-1/2 (444)	18-1/2 (470)	19-1/2 (495)
Inseams 2/								
- X-short	27 (686)	27 (686)	27 (686)	27 (686)	27 (686)	27 (686)	27 (686)	27 (686)
		28 (711)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)
- Short	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)	29 (737)
		30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)
- Regular	31 (787)	31 (787)	31 (787)	31 (787)	31 (787)	31 (787)	31 (787)	31 (787)
		32 (813)	32 (813)	32 (813)	32 (813)	32 (813)	32 (813)	32 (813)
- Long		33 (838)	33 (838)	33 (838)	33 (838)	33 (838)	33 (838)	33 (838)
		34 (864)	34 (864)	34 (864)	34 (864)	34 (864)	34 (864)	34 (864)
- X-long		35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

	EVEN SIZES											
	26	28	30	32	34	36	38	40	42	44	46	48
1/2 Waist 1/	13 (330)	14 (356)	15 (381)	16 (406)	17 (432)	18 (457)	19 (483)	20 (508)	21 (533)	22 (559)	23 (584)	24 (610)
Inseams 2/												
- X-short	27 (686) 28 (711)	27 (686) 28 (711)	27 (686) 28 (711)	27 (686) 28 (711)	27 (686) 28 (711)	27 (686) 28 (711)	27 (686) 28 (711)	27 (686) 28 (711)				
- Short	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)	29 (737) 30 (762)			
- Regular	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)	31 (787) 32 (813)		
- Long	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)	33 (838) 34 (864)
- X long	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	35 (889)	
- XX-long			36 (914) 37 (940)	36 (914) 37 (940)	36 (914) 37 (940)	36 (914) 37 (940)	36 (914) 37 (940)	36 (914) 37 (940)	36 (914) 37 (940)	36 (914) 37 (940)		

1/ Measure along top edge of waistband from folded edge to folded edge with front closed.

2/ Measure along inseam from crotch seam to bottom edge of leg.

3.11 Workmanship. The finished trousers shall conform to the quality of product established by this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification. The contractor shall furnish a certificate of compliance stating that the hook and eye is one of the specified types, or if an "or equal" type is used, that it conforms to that approved by the contracting officer as required in 3.2.10.

4.2 Quality conformance inspection.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, drawings, standards, or purchase descriptions, testing shall be performed on components listed in table IV for characteristics noted. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

The basis for lot size and sample units for testing shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

Component	Lots expressed as	Sample unit for testing
Tobacco cloth	Yards	1/2 yard full width
Waistband interlining	Yards	1/2 yard full width 1/
Slide fastener tape	Yards	1/2 linear yard 1/

1/ The sample unit shall be processed in the same manner and in the same facilities as the end item.

* TABLE IV. Component testing

Component	Characteristic	Requirement paragraph	Test method
Cotton/polyester cloth, pocketing, waistband lining, right fly lining, crotch piece	Durable press treatment	3.2.2	1/
Tobacco cloth (left fly interlining)	Fiber identification	3.2.3	1200 1/
	Non-permanent size	3.2.3	1/
	Yarns per inch	3.2.3	5050
	Weight	3.2.3	5041
Waistband interlining cloth	Fiber percentage	3.2.4	1/
	Weave	3.2.4	Visual
	Yarns per inch	3.2.4	5050
	Weight	3.2.4	5041
	Durable press treatment	3.2.4	1/
Slide fastener tape	Material identification	3.2.8.1	1/
	Colorfastness to laundering	3.2.8.1	5610

1/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the requirements stated.

4.2.2 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1488. The trousers shall be classified as Dress ("D") trousers.

* 4.2.3 End item testing. The finished cured trousers shall be tested as specified in table V. All test reports shall contain the individual values used in expressing the final result. The lot size shall be expressed in units of one pair of trousers each. The sample unit shall be two finished pair of trousers. One pair of unlaundered trousers shall be used for determining shade and tearing strength tests, and the remaining pair of trousers shall be laundered and used to perform the remaining tests. The sample size shall be as specified below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

Lot size	Sample size
800 or less	5
801 to 22,000 inclusive	8
22,001 and over	13

The lot shall be unacceptable if one or more sample units fail to meet any of the following conditions:

a. For cloth appearance and crease appearance:

Two-thirds or more of the individual ratings for each characteristic shall be 4 or above and no single rating shall fall below 3. 1/

b. For seam appearance, fly appearance, and soil release:

No single rating shall fall below 3.

c. For shade and tearing strength:

No specimen shall fail to meet the specified requirement.

1/ The lot rating for each characteristic shall be determined from the total ratings assigned for that characteristic in each inspection lot, i.e., in a sample size of eight trousers, the appearance rating for each characteristic indicated above shall be based upon the total of 24 values assigned for that characteristic (three judgements for each of the eight trousers).

TABLE V. End item testing

Characteristics	Requirement paragraph	Test method
Cloth appearance rating	3.3.1	4.3.1
Crease appearance rating	3.3.1	4.3.1
Seam appearance rating	3.3.1	4.3.1
Fly appearance rating	3.3.1	4.3.1
Soil release rating	3.3.1	4.3.1
Shade	3.3.2	1/
Tearing strength	3.4	2/

1/ The shade of the finished cured trousers shall match the standard sample under artificial daylight having a color temperature of 7500 kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800 kelvin.

2/ Test in accordance with the cured fabric requirements of MIL-C-43791 for class 1, and MIL-C-43763 for class 2. This test shall be performed after curing but prior to laundering.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

4.3 Test methods.

4.3.1 Tests for appearance and soil release.

4.3.1.1 Apparatus and materials used for laundering. The following apparatus and material are required for laundering:

a. Automatic washing machine (see 6.7).
b. Automatic dryer (see 6.7).
c. AATCC Standard Detergent 124 or equivalent.
d. Dummy pieces for ballast - 3 feet by 3 feet (1 m by 1 m) hemmed pieces of the basic material to be added to test trousers, to make a 4-pound (1.8 kg) load.
e. Mineral oil: Nujol, Plough, Inc., Memphis, TN or equivalent.
f. AATCC standard blotting paper or equivalent.
g. Five-pound (2.3 kg) weight, 2-1/2 inches (64 mm) in diameter.
h. Polyethylene film, 3 by 3 inches (76 by 76 mm).
i. Eye dropper.

4.3.1.2 Apparatus and material used for evaluation. The following apparatus and material are required for evaluation of samples:

a. Apparatus for overhead and side lighting procedure as specified in AATCC Test Methods 124-1975 and 88C-1970.
b. AATCC three dimensional Durable Press Replicas.
c. AATCC photographic standards for evaluating single needle stitching and for evaluating pressed in creases.
d. Deering Milliken photographic standards for evaluating stain release.
e. Non-reflecting black-topped table 35 $\pm$ 1 inches (889 $\pm$ 25 mm) high and at least 30 inches (760 mm) by 24 inches (610 mm), with the long dimension parallel and adjacent to the viewing board.
f. NARADCOM photographic standards for evaluating trouser flys (see 6.3).

4.3.1.3.1 Procedure.

4.3.1.3.1 Laundering. If the trousers weigh less than 4 pounds (1.8 kg), ballast to make up a standard 4 pound (1.8 kg) load shall be added to the test trousers. The ballast shall consist of durable press trousers or pieces of the basic fabric. The washer shall be set for high water level, warm water temperature, and a 12-minute wash on the wash and wear cycle. The water used shall have a hardness not greater than 50 parts per million (ppm). The wash temperature shall be 115° $\pm$ 5°F (46° $\pm$ 3°C). When the washer has filled, add 140 g of detergent. Allow the washer to proceed automatically through the final spin cycle. Remove the trousers immediately at the completion of the final spin and separate the trousers, and ballast pieces when required, if tangled. Place the complete washed load in the dryer and dry at the normal cycle and at a setting which generates an exhaust temperature range of 140° to 160°F (60° to 71°C). Operate the dryer

Source: https://assist.dla.mil -- Downloaded: 202640-21T22:37Z
Check the source to verify that this is the currentversion before use.

until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. Repeat the wash and dry cycle until the load has completed four cycles. At the completion of the fourth cycle, the trousers shall be stained with mineral oil in three different spots on the inside of one leg of the trousers. Place the area to be stained on AATCC standard blotting paper. Using an eye dropper, drop five drops of mineral oil for each spot. Place a 3 by 3 inch (76 by 76 mm) piece of polyethylene film over the oil. Place a 5-pound (2.3 kg) weight (2-1/2 inches (64 mm) diameter) on the film directly over the oil. Keep the weight in place for 60 seconds. Remove the weight and polyethylene film and wipe off the excess oil with a clean tissue. Allow the test specimen to hang undisturbed for at least 15 minutes but not longer than 2 hours. The stained trousers, and the dummy pieces when required, shall then be returned to the washing machine and washed for the fifth (last) complete washing and drying cycle. The trousers shall be buttoned and the legs shall be folded along the crease and suspended by the leg bottoms in a pants holder or similar device with legs kept separate from each other. The trousers shall also be held in this manner during conditioning and during interruption of wash and dry cycles.

4.3.1.3.2 Evaluation. Three trained observers shall evaluate and rate each sample unit for appearance criteria independently of each other. The trousers shall be zipped and placed on a clothes hanger, similar to that used to hang women's skirts, by spring clips at the waistband. The trousers shall hang with the waistband extended so that the front lays against the back and the crease falls in the center of the leg as it faces the observer. The trousers shall be suspended on the viewing board in such a manner that the trousers lay flat on the surface and the point midway between the top of the waistband and the lower hem of the leg is 5 feet (1.5 m) from the floor. With the cloth, seam, fly, or crease appearance standards, as applicable, placed on the viewing board, the observer shall compare the trousers to each standard and shall rate the trousers according to the appearance on the cloth, seam, fly, or crease standard that most nearly matches the appearance of the trousers. No estimation of ratings falling between standards is allowed and the full numerical rating of the nearest standard must be assigned. Evaluation shall be conducted in a room where the only source of light will be that used for observation. To prevent unwanted reflection of light that will interfere with the observation, the walls of the room may be painted a non-reflecting black, or blackout curtains may be hung on each side of the viewing area.

4.3.1.3.2.1 Evaluation of cloth appearance. Overhead lighting procedure and Durable Press Replicas shall be used (see 4.3.1.2). To facilitate comparative testing, the three dimensional plastic replicas that most nearly match the cloth appearance of the trousers shall be mounted on the board on each side of the trousers. The cloth appearance of the trousers shall be observed and compared with the standards. The overall cloth appearance of the trousers, i.e., front and back combined, shall be rated and assigned the numerical value of the appearance replica that most nearly matches it. The rating values assigned by each of the three observers for cloth appearance shall be reported for each sample unit.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

* 4.3.1.3.2.2 Evaluation of seam appearance. Overhead lighting procedure and single needle stitching standards shall be used (see 4.3.1.2). To facilitate comparative testing, the seam standards shall be mounted on the viewing board to the left of the trousers as viewed by the observer. Seams specified in 3.3.1 shall be observed and compared with the standards. The appearance of each seam shall be assigned the numerical value of the standard that most nearly matches it. The rating values assigned by each of the three observers for each sample unit shall be reported.

* 4.3.1.3.2.3 Evaluation of soil release. Overhead lighting procedure and the soil release standard shall be used (see 4.3.1.2). To facilitate comparative testing, the soil release standard shall be mounted and centered on the viewing board 45 inches (1.14 m) from the floor (center). The trousers, with the stained area visible, shall be placed upon the black-topped table and in front of the standard. The trouser stains shall be compared with the standard and shall be assigned the numerical value of the standard that they most nearly match. One rating shall be assigned for all three stains by each observer. The rating value assigned by each of the three observers for each sample unit shall be reported.

* 4.3.1.3.2.4 Evaluation of crease appearance. Overhead and side lighting procedures and the crease appearance standard shall be used (see 4.3.1.2). The required side lighting shall be added to the overhead lighting and the trousers evaluated for crease appearance. To facilitate comparative testing, the crease appearance standard shall be mounted on the viewing board to the left center of the trousers as viewed by the observer. The trousers shall be adjusted as necessary in order that each crease area being evaluated, i.e., front or back, lies in a relaxed position perpendicular to the side lighting in order to allow proper comparison to the standard. Each crease area specified in 3.3.1 shall be compared with the standard and assigned the numerical value of the standard that most nearly matches it. Each crease area specified shall be rated on an overall appearance basis and assigned a value accordingly, i.e., creases on the back shall be rated in accordance with the overall appearance of both creases as a unit and not on an individual crease basis. Individual ratings assigned by each of the three observers for each crease area specified in 3.3.1 shall be reported for each sample unit.

* 4.3.1.3.2.5 Evaluation of fly appearance. Overhead lighting procedures and the NARADCOM fly appearance standards shall be used (see 4.3.1.2). To facilitate comparative testing, the fly standards shall be mounted on the viewing board to the observer's left of the trousers front as viewed. The fly appearance shall be observed and compared with the standard. The appearance of each fly shall be assigned the numerical value of the standard that most nearly matches it. The rating values assigned by each of the three observers for each sample unit shall be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of trousers right side out shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches (584 mm). The trousers shall then be folded in half the length to approximately 11-1/2 inches (292 mm). For the larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches (368 mm). Ten pairs of folded trousers of one class and size only shall be neatly stacked in a bundle with the waistbands alternated and securely crosstied with cotton tape or twine.

* 5.1.2 Level C. Trousers shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A packing. Forty pairs of trousers of one class and size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to grade V2s, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same shipping container.

5.2.2 Level B packing. Forty pairs of trousers of one class and size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of MIL-B-17757.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

5.2.3 Level C packing. Trousers preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes of one class only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (130 by 100 mm) with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The trousers are for wear by male personnel of the Department of the Army as part of the semi-dress uniform.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Class and sizes required (see 1.2).
(c) Selection of the applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

* 6.3 Samples and photographic standards. For access to samples of the trousers, shade samples, and the NARADCOM photographic standards, address the procuring activity issuing the invitation for bids.

6.4 Suggested sewing techniques. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following: The needle shall be the smallest size possible with a slim point. The smallest throat plate hole possible should be used to prevent the flagging. Presser foot pressure should be just enough to insure a steady flow of material. Feed dogs should contain 18 to 20 teeth per inch (7 to 8 teeth/cm) for normal sewing and 20 to 25 per inch (8 to 10 teeth/cm) for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tensions should be used while maintaining a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustments maintained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

6.5 Suggested machine setting. Experience has shown that the puckering when sewing with stitch 401, can be reduced considerably if not eliminated by the use of needle feed machines setting the feed one stitch higher than the desired number and the foot one stitch lower.

6.6 Edge stitching techniques. Experience has shown that the use of a Clinton double guide foot in edge stitching pocket opening will facilitate the operation when stitching from top to bottom of opening.

6.7 Apparatus. The recommended apparatus for test procedure in 4.3.1.1, sub-paragraphs a and b are:

a. Kenmore Automatic Washing Machine Model 600, or similar washing machine. In case of dispute, the Kenmore Model 600 shall be used.

b. Kenmore Automatic Dryer Model 600, or equivalent.

6.8 Durable press resins. Only those durable press resins already approved by the appropriate medical service and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

* 6.9 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standards for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.

6.10 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8405-A753

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:37Z
Check the source to verify that this is the current version before use.

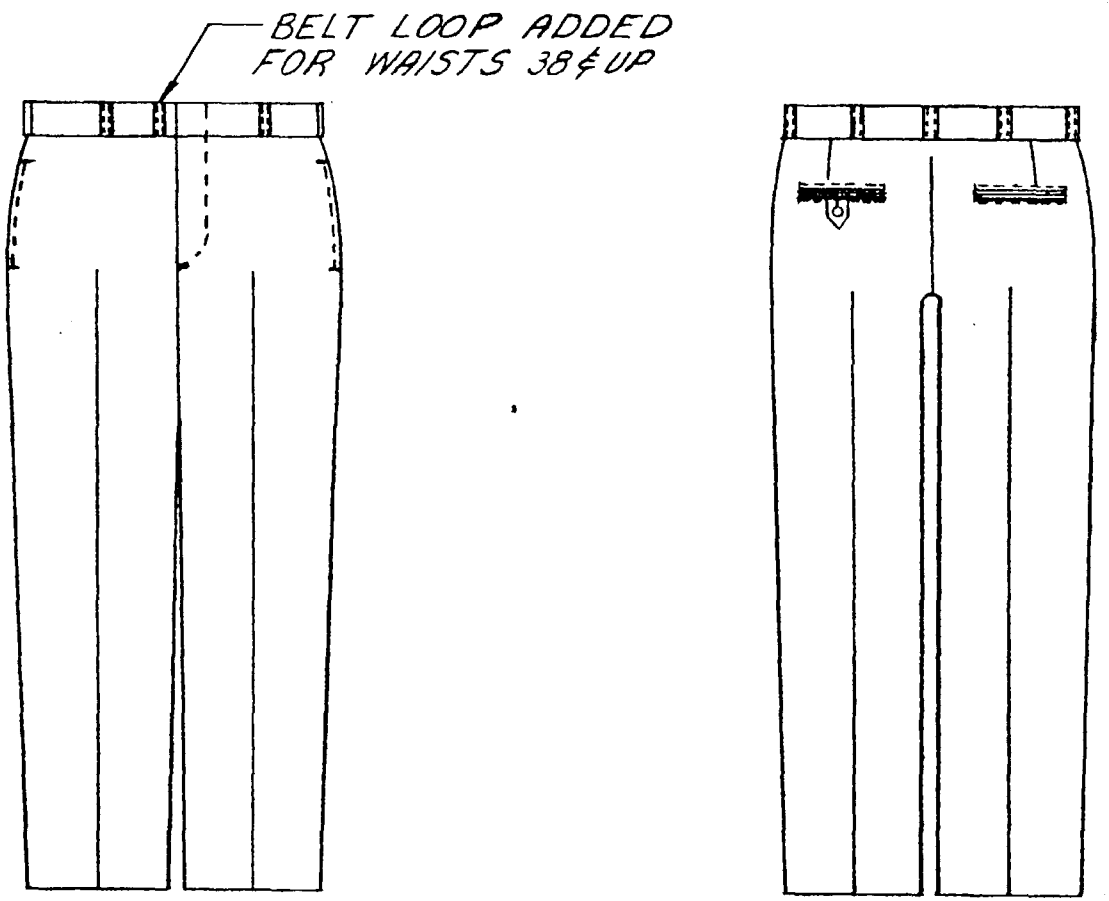


FIG. 1 TROUSERS, MEN'S, ARMY TAN 445, DURABLE PRESS

2-1-1067 B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-T-43853B(GL) TROUSERS, MEN'S, ARMY TAN 445, DURABLE PRESS

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TDC

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TDC
Natick, MA 01760

NATICK OP 1 JUL 77
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:37Z
Check the source to verify that this is the current version before use.