MIL-S-12109/13
22 November 1968


MILITARY SPECIFICATION SHEET
Solenoid, Electrical; Class 2 (Machine Gun), Cal .50, 24 Volt DC, 7.7 AMP Max.

The complete requirements for procuring the Solenoid described herein shall consist of this document and the issue in effect of Specification MIL-S-12109.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:21Z
Check the source to verify that this is the current version before use.

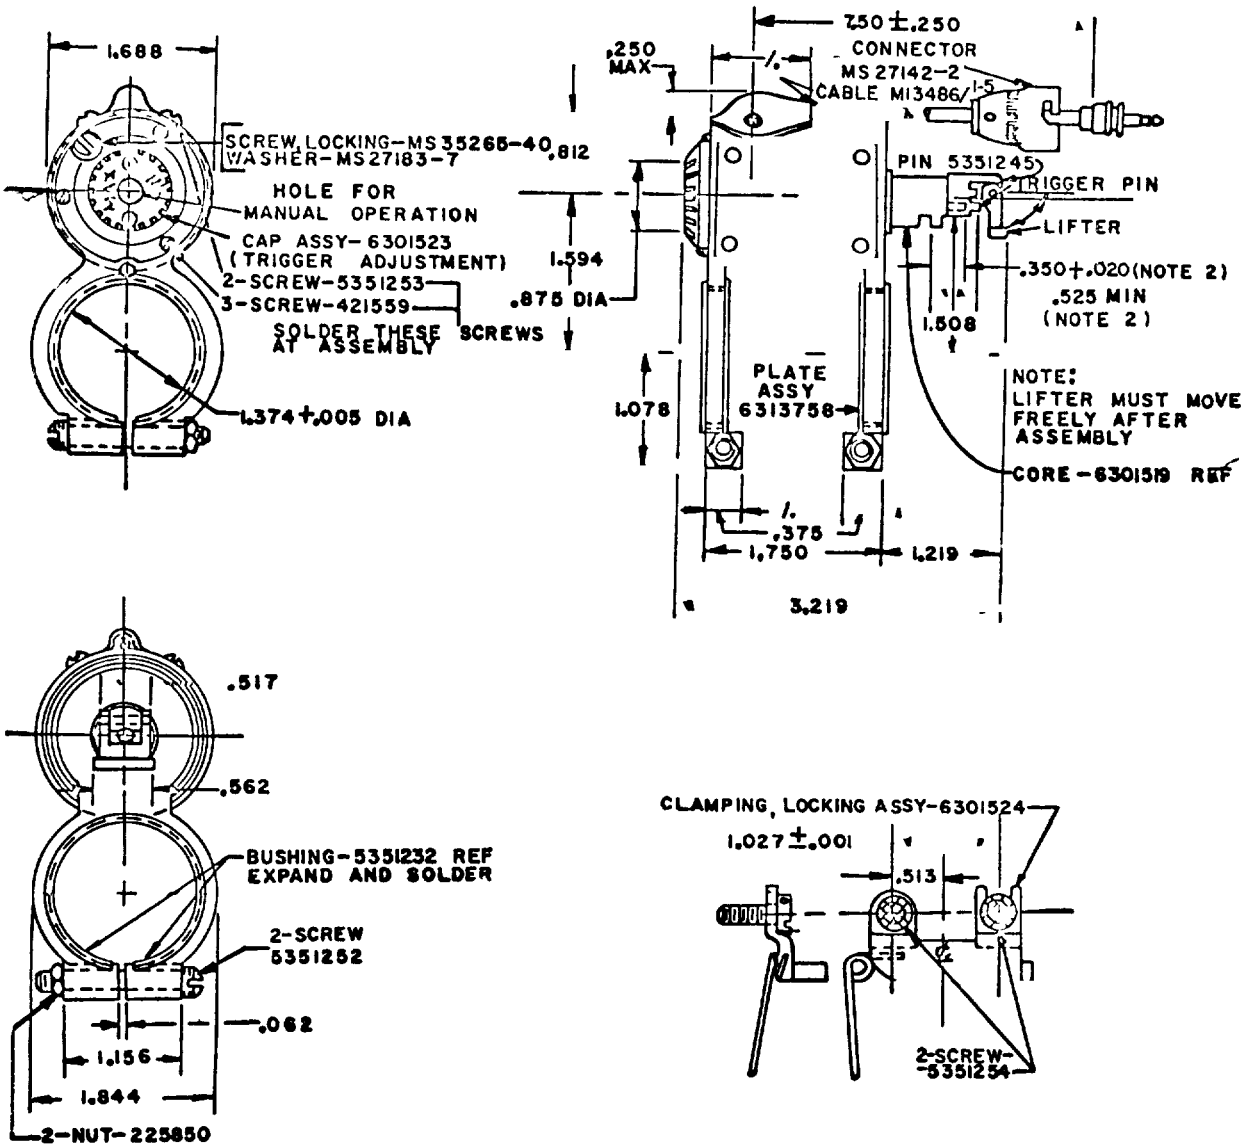

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:21Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances are ± .010 on decimals, ± 2° on angular dimensions.

2. The position of trigger pin must be adjustable from a fully retracted position of 0.35 + 0.020 inch from the locating notch to a fully extended position at least 0.525 inch from the locating notch. Adjustment shall be accomplished in steps not exceeding 0.003 inch, indexing with detents by rotating cap assembly 6301523 over the full range of adjustment. In the fully retracted (minimum) position, the adjusting cap must come to a stop. The travel of trigger pin must be 0.160 inch when the solenoid is energized.

3. Clamp assembly used to locate and retain solenoids on buffer tube of gun, machine, cal .50, M2, fixed and turret type. Clamp assembly, although not a part of solenoid, must be packaged with solenoid.

Requirement: 25 lbs Minimum static force at 0.031-inch air gap over specified operating voltage range.

Part Number: M12109/13-1

Former Army Part Numbers: 8724532
7354150 For new design use Part No. M12109/13-1, For procurement use Part No. M12109/14-1

Custodians:
Army - AT
Navy - OS
Air Force - 85

Preparing activity:
Army - AT
Project No. 5945-0144-13

Review activities:
Army - MU, WC

User activities:
Army - AV
Navy - AS, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:21Z
Check the source to verify that this is the current version before use.