INCH-POUND
MIL-DTL-12109/5A
20 August 1998
SUPERSEDING
MIL-S-12109/5
31 October 1968

DETAIL SPECIFICATION SHEET

SOLENOID, ELECTRICAL; CLASS 2 (MACHINE GUN)
CAL .30, 24 VOLT DC, 4.5 AMP MAX

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-12109 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

APPLICABLE DOCUMENTS:

Government documents.

Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-C-13486 - Cable, Special Purpose, Electrical: Low-Tension, Heavy-Duty, Single-Conductor and Multiconductor, Shielded and Unshielded, General Specification For.

Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:20Z
Check the source to verify that this is the current version before use.

DRAWING

7760598 - Connector, Plug, Electrical.

(Application for copies should be addressed to the U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

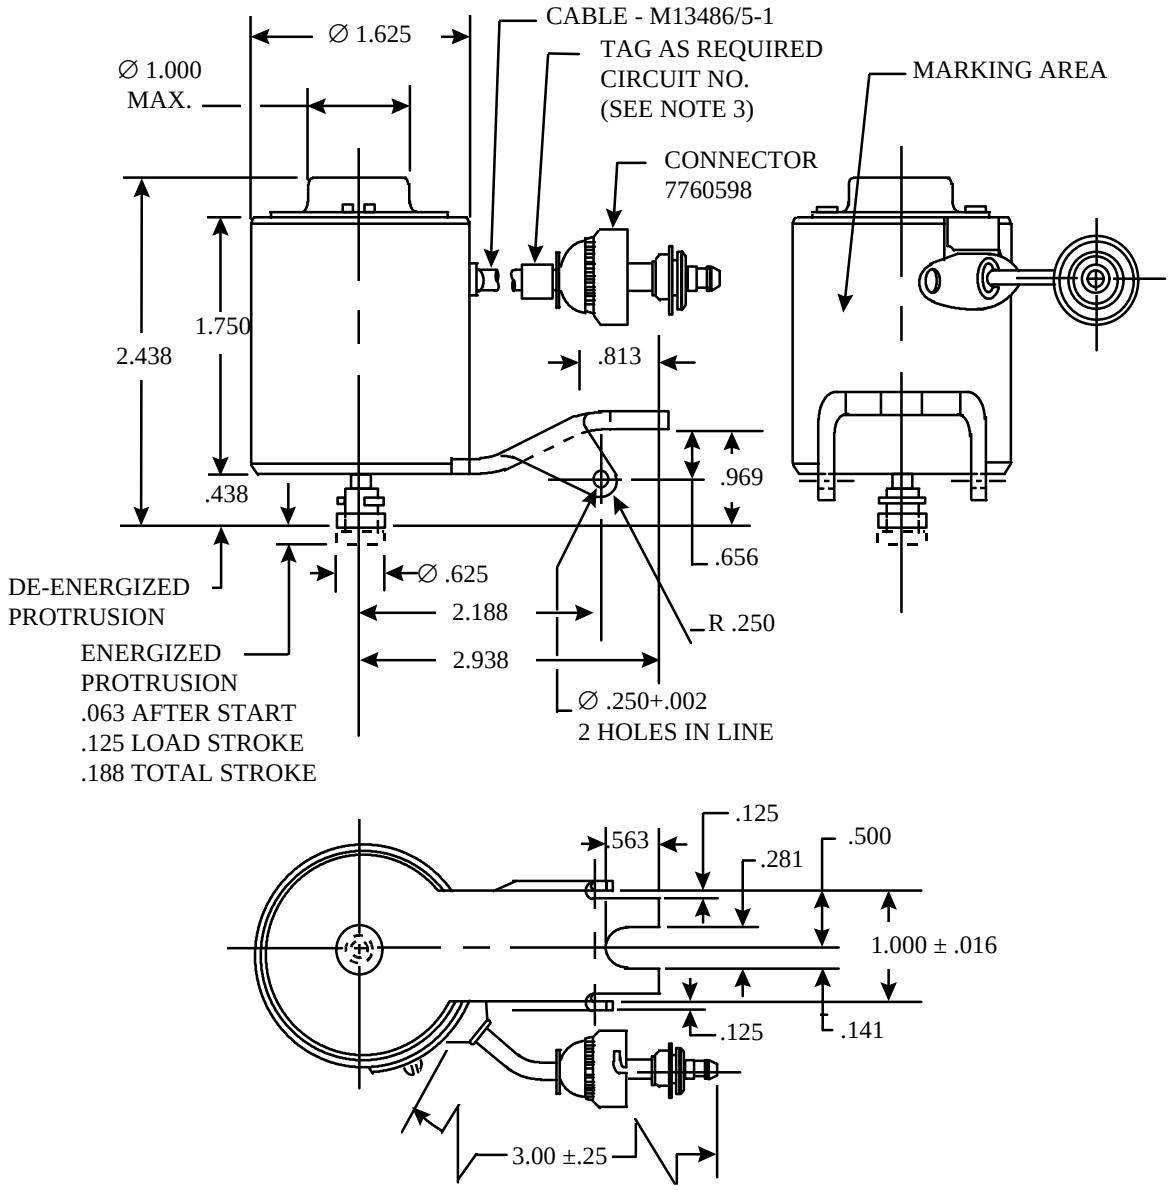

NOTES:

1. This drawing is for interface and envelope requirements and is not intended to limit design.
2. Dimensions are in inches, Unless otherwise specified, tolerances are ± 0.010 on decimals, ± 2° on angular dimensions.
3. Apply circuit number as appropriate to vehicle circuit wiring requirement.

FIGURE 1. Solenoid characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:20Z
Check the source to verify that this is the current version before use.

The static force shall be a minimum of 12 pound (lb) (5 kilogram (kg)), over 0.125 inch (in.) (0.32 centimeters (cm)) load stroke and after 0.063 running start over the specified operating voltage range, (0.188 in. [0.48 cm] total stroke).

The current shall not exceed 4.5 amperes maximum.

NOTES:

PART OR IDENTIFYING NUMBER (PIN):

M12109/5 (Former part numbers M12109/5-1 and 8338948)

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AT
Navy - OS
Air Force - 85

Preparing Activity:
Army - AT

(Project 5945-1025-02)

Review Activities:
Army - AR, EA
Navy - MC
Air Force - 99
DLA - CC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:20Z
Check the source to verify that this is the current version before use.