MIL-S-12109/2
31 October 1968

MILITARY SPECIFICATION SHEET
Solenoid, Electrical; Class 2 (Machine run).,
Cal .30, 24 volt DC, 4.5 AMP Max.

The complete requirements for procuring the Solenoid described herein shall consist of this document and the issue in effect of Specification MIL-S-12109.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

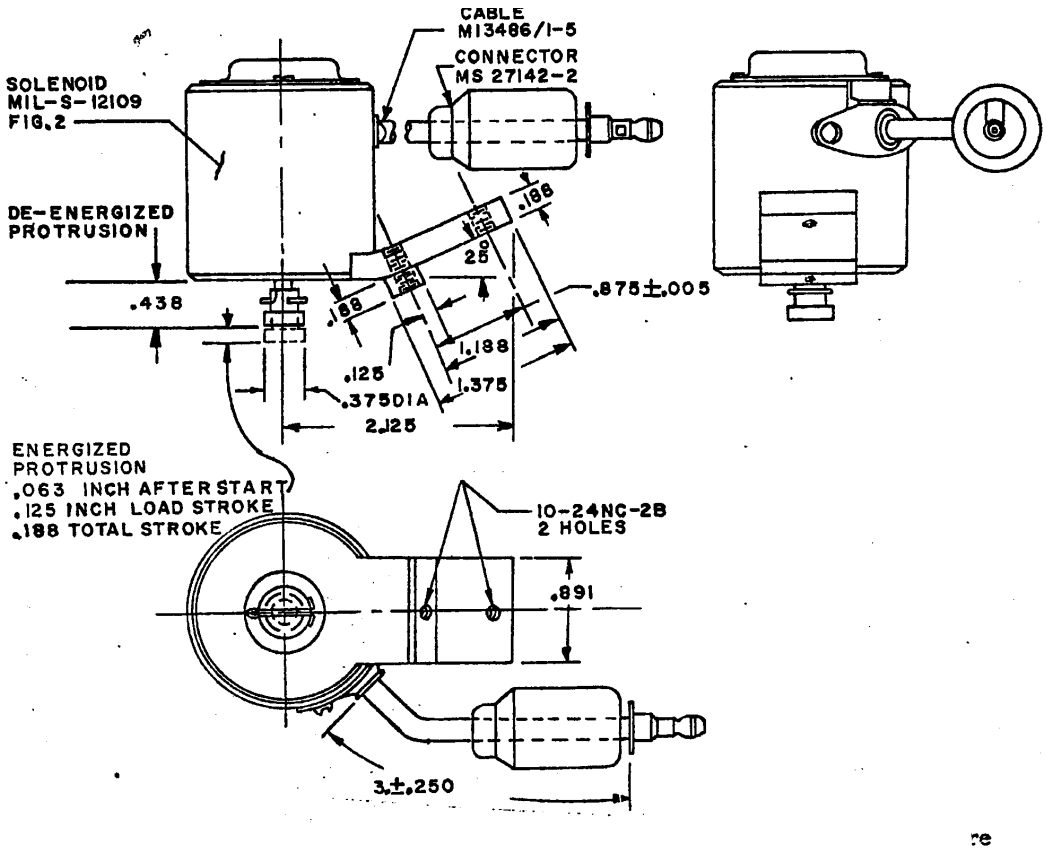

Note: Dimensions are in inches. Unless otherwise specified, tolerance are ±.010 on decimal, $\pm 2^0$ on angular dimensions.

FSC-5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:19Z
Check the source to verify that this is the current version before use.

Requirement: 12 lbs Minimum static force, over .125 load stroke after .063 running start over specified operating voltage range, (.188 total stroke).

Part Number: M12109/2-1
Former Army Part Number: 7971665

Custodians:
Army – AT
Navy – OS
Air Force – 85

Preparing activity:
Army – AT
Project No. 5945-0144-2

Review activities:
Army – MU, WC

User activities:
Army - AV
Navy - AS, NC

FSC-5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:19Z
Check the source to verify that this is the current version before use.