MIL-S-12109/3A
24 April 1972
SUPERSEDING
MIL-S-12109/3
31 October 1968

MILITARY SPECIFICATION SHEET
Solenoid, Electrica1; Class 2 (Machine Gun),
Cal .30, 24 volt DC, 4.5 AMP Max.

The complete requirements for procuring the Solenoid described herein shall consist of this document and the issue in effect of Specification MIL-S-l2l09.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

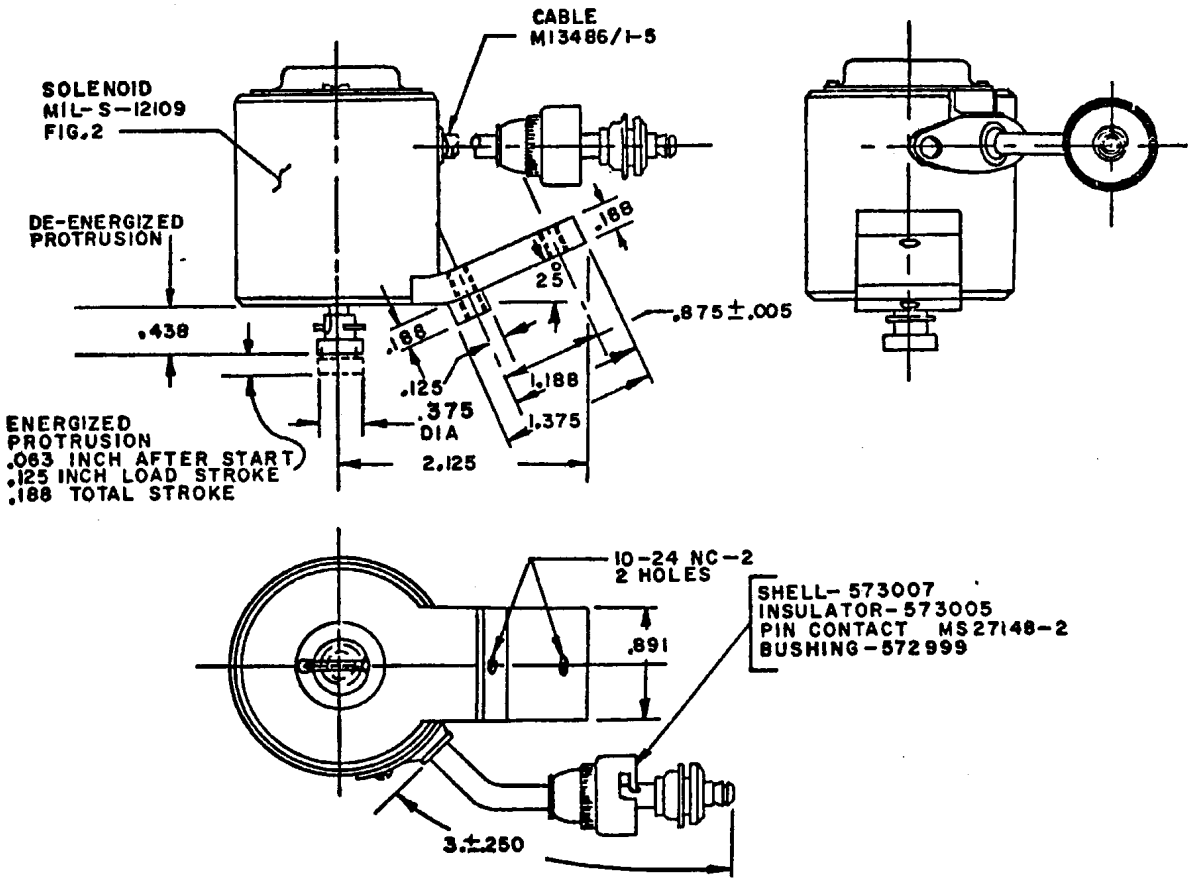

Note: Dimensions are in inches. Unless otherwise specified, tolerances are ±.010 on decimals, ±2° on angular dimensions.

FSC-5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:20Z
Check the source to verify that this is the current version before use.

Requirement: 12 1bs Minimum static force, over .125 load stroke after .063 running start over specified operating vo1tage range (.188 total stroke).

Part Number: M12109/3-1
Former Army Part Number: 7354149 (Superseding 7057222)
For new design work use Part No. M12109/2-1

Custodians:
Army - AT
Navy - OS
Air Force - 80

Preparing activity:
Army - AT
Project No. 5945-0285

Review activities:
Army - MU, WC

User activities:
Army - AV
Navy - AS, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:20Z
Check the source to verify that this is the current version before use.