
NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


PERFORMANCE SPECIFICATION SHEET

COILS, CHIP, RADIO FREQUENCY, VARIABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the coils described herein shall consist of this document and the latest issue of Specification MIL-C-83446.

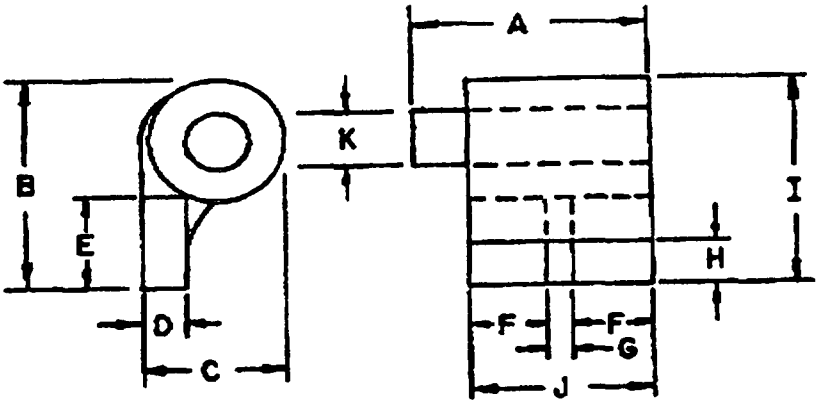



	INCHES	MM
A.	.180 Max	4.57 Max
B.	.140 Max	3.56 Max
C.	.095 Max (-41 thru -45)	2.41 Max
	.065 Max (-1 thru -40)	1.65 Max
D.	.040 ±.010	1.02 ±.26
E.	.045 ±.005	1.14 ±.13
F.	.045 ±.005	1.14 ±.13
G.	.010 ±.002	.25 ±.05
H.	.010 Min	.25 Min
I.	.140 Max	3.56 Max
J.	.100 ±.005	2.54 ±.13
K.	.033 ±.002 Dia	.84 ±.05
L.	.030 ±.006	.76 ±.13
M.	.100 ±.005	2.54 ±.13
N.	.035 ±.005	.89 ±.13
O.	.045 ±.005	1.14 ±.13

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 24.4 mm.

FIGURE 1. Variable, chip coil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Case: Epoxy.

Weight: 0.5 gram maximum.

Operating temperature range: -55° to +125°C.

Storage temperature range: -55° to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): Shall be in accordance with table I. Test fixture shall be as shown on figure 2, or equal.

TABLE I. Electrical characteristics (initial).

Dash number	Inductance			Q min over L range	Q (typ) (at L Nom)	Test Frequency 1/	Self-resonant frequency (min)	DC resistance at 25°C (max)	Current (max) 2/	Incremental current (max) 3/
	Min	Nom	Max							
	µH	µH	µH			MHz	KHz	Ohms	mA	mA
01	0.010	0.013	0.016	50	60	200	1200	0.03	250	
02	0.018	0.022	0.025	50	60	200	1050	0.07		
03	0.036	0.044	0.051	40	50	100	740	0.13		
04	0.049	0.065	0.076	40	50	100	600	0.20		
05	0.071	0.085	0.100	30	40	25	530	0.32		
06	0.080	0.105	0.130				525	0.34	200	
07	0.107	0.129	0.150				500	0.35	200	
08	0.120	0.150	0.180				470	0.41	180	
09	0.157	0.189	0.220				400	0.45	180	
10	0.193	0.232	0.270				350	0.50	180	
11	0.236	0.283	0.330				320	0.60	140	
12	0.230	0.300	0.370				275	0.62	140	
13	0.336	0.403	0.470				255	0.65	100	
14	0.400	0.480	0.560				230	0.75		
15	0.485	0.583	0.680				190	0.85		
16	0.565	0.660	0.760				170	0.88		
17	0.586	0.703	0.820				150	0.90		
18	0.616	0.783	0.950				145	0.95		
19	0.666	0.833	1.00	25	35		140	0.98		
20	1.00	1.25	1.50			7.9	110	1.0		
21	1.47	1.84	2.20				100	1.4	80	
22	1.80	2.25	2.70				89	1.6	75	
23	2.20	2.75	3.30				77	1.8	65	
24	3.13	3.92	4.70				49	2.2	60	
25	3.87	4.84	5.80				38	2.8	58	
26	4.53	5.67	6.80				36	3.0	55	
27	5.47	6.84	8.20				21	3.0	55	
28	6.00	7.50	10.00			2.5	20	2.8	55	50
29	6.50	9.75	13.00			2.5	19	3.0	53	45

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:11Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) - Continued.

Dash number	Inductance Min	Inductance Nom	Inductance Max	Q min over L range	Q (typ) (at L Nom)	Test Frequency 1/	Self-resonant frequency (min)	DC resistance at 25°C (max)	Current (max) 2/	Incremental current (max) 3/
	µH	µH	µH			MHz	MHz	Ohms	mA	mA
30	8.00	12.00	16.00	25	35	2.5	16	3.4	50	40
31	10.00	15.00	20.00				14	3.5	43	37
32	11.00	16.50	22.00				12	4.0	43	36
33	15.00	22.50	30.00				11	4.5	40	32
34	18.00	27.00	36.00				10	5.0	40	31
35	23.00	35.00	47.00				8.5	5.7	39	29
36	28.00	42.00	56.00				8.3	7.0	35	28
37	34.00	51.00	68.00				8.2	8.0	30	26
38	37.00	56.00	75.00				5.9	9.0	30	25
39	43.00	65.00	86.00				5.6	10.0	28	23
40	50.00	75.00	100				5.3	12.0	27	20
41	60.00	90.00	120	20	30	0.79	4.4	14.0	25	20
42	75.00	112.5	150				4.0	18.0	22	20
43	235	353	470				2.1	30.0	16	16
44	340	510	680				2.1	35.0	15	15
45	500	750	1000				1.1	75.0	11	11

1/ Test frequency range: 0.25 through 25 MHz.

Inductance shall be measured on instruments such as the HP260-A Q Meter, HP4342A, HP250b RX Meter, or equivalent with TF-301 test fixture, or equal (see figure 2). Fixture inductance (approximately 0.038 µH) and residual Q-Meter inductance (approximately 0.01 uH) should be subtracted from indicated inductance.

Test frequency range: 25 through 200 MHz.

Inductance shall be measured on instruments such as the HP190-A Q Meter, HP260-A Q Meter, HP4342A, HP250B RX Meter, or equivalent with TF-301 test fixture, or equal (see figure 2). Fixture inductance (approximately 0.009 µH) should be subtracted from calculated inductance.

2/ Maximum current allowed not to exceed specified temperature rise.

3/ Applicable to ferrite core only.

Electrical characteristics (final): See table II.

TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from the initial measurements			
	Inductance	DC resistance	Self-resonant frequency	Q
Qualification inspection	Percent		Percent	Percent
Group II	±5	±(32 +0.001 ohm)	-8	-10
Group IV	±5	±(22 +0.001 ohm)	-10	-10
Group V	±2	---	---	-10
Quality conformance inspection				
Group C				
Subgroup II	±5	±(32 +0.001 ohm)	-8	-10
Subgroup IV	±5	±(32 +0.001 ohm)	-8	-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:11Z
Check the source to verify that this is the current version before use.

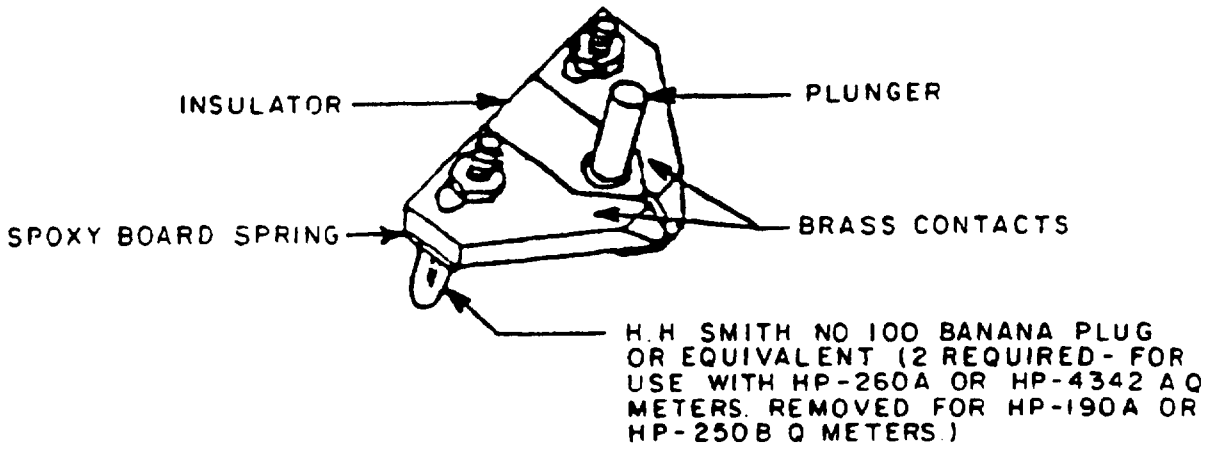


FIGURE 2. Typical chip coil test fixture (TF-301, or equal).

Part number. The part number shall be in the following form.

M83446/18-	04	B
Sequentially assigned dash numbers (see table I)		
Termination finish (see MIL-C-83446)		

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS
Air Force - 19
DLA - ES

User activities:
Navy - OS
Air Force - 11

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0576-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-83446/18 Coils, Chip, Radio Frequency, Variable

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

CDR, US Army ERADCOM
ATTN: DELET-R-S
Fort MONMOUTH, NJ - 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:11Z
Check the source to verify that this is the current version before use.