NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-83446/26A
14 February 1995
SUPERSEDING
MIL-C-83446/26
20 December 1988

PERFORMANCE SPECIFICATION SHEET

COILS, RADIO FREQUENCY, CHIP, FIXED, MAGNETICALLY SHIELDED, IRON CORE-IRON SLEEVE AND IRON CORE-FERRITE SLEEVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83446.

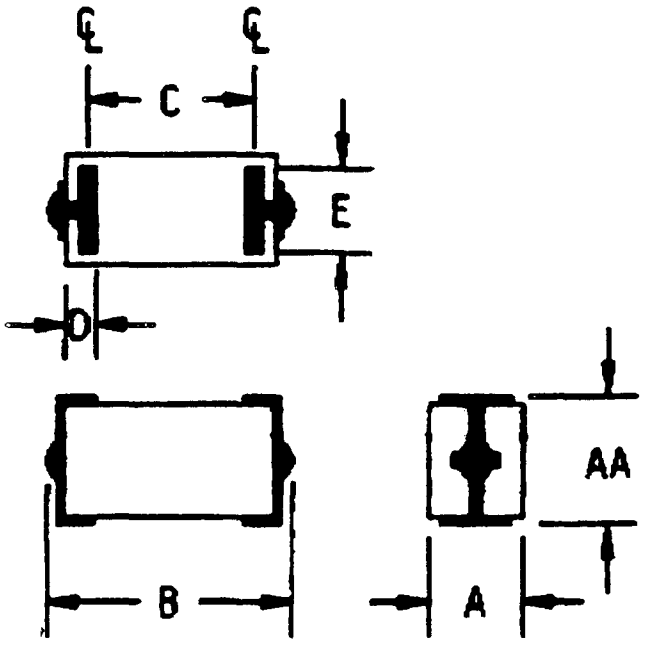

Letter	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.105 (2.67)	.125 (3.18)
AA	.125 (3.18)	.145 (3.68)
B	.300 (7.62)	.320 (8.13)
C	.230 (5.84)	.260 (6.60)
D	.020 (0.51)	.040 (1.02)
E	.075 (1.91)	.095 (2.41)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Dimensions AA and B are measured over the terminals.

FIGURE 1. Dimensions and configuration.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Bond strength: Force 2 pounds.

(A) Weight: 0.01 ounce maximum.

Operating temperature range: -55°C to +105°C.

Temperature rise (at +90°C): +15°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 200 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202 (70,000 feet), test voltage 80 volts rms.

Electrical characteristics (initial): See table I.

Percent coupling: 3 percent maximum.

Electrical characteristics (final): See table II.

Test fixture: Tests shall be performed using test fixtures shown on figures 2 and 3, or equivalent.

(A) Part or Identifying Number (PIN): The PIN shall be in the following form:

M83446/26- 04 B

Sequentially assigned dash numbers (see table I)

Termination finish (see MIL-C-83446)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) for dash numbers 01 through 37.

Dash number	Inductance ±10% (μH)	Q (min)	Test frequency (L and Q) (MHz)	Self-resonant frequency (min) (MHz)	DC resistance (max) (ohms)	Current rating mA (max)	Incremental current dc (mA)	Material (A)
01	.10	45	25	1/ 490	.10	670	670	
02	.12	45	25	1/ 430	.11	635	635	
03	.15	45	25	1/ 415	.12	610	610	
04	.18	45	25	1/ 375	.13	585	585	
05	.22	45	25	1/ 330	.15	545	545	
06	.27	45	25	1/ 300	.16	530	530	
07	.33	44	25	1/ 260	.18	495	495	
08	.39	42	25	230	.19	485	485	
09	.47	41	25	220	.21	460	460	
10	.56	41	25	210	.23	440	440	
11	.68	39	25	180	.24	430	430	
12	.82	38	25	165	.27	405	405	2/
13	1.00	37	25	150	.30	385	385	
14	1.20	40	7.9	130	.73	247	247	
15	1.50	41	7.9	115	.86	228	228	
16	1.80	43	7.9	105	.95	217	217	
17	2.20	45	7.9	95	1.10	202	202	
18	2.70	48	7.9	90	1.20	193	193	
19	3.30	49	7.9	80	1.30	185	185	
20	3.90	50	7.9	75	1.50	173	173	
21	4.70	50	7.9	70	2.40	136	136	
22	5.60	50	7.9	60	2.90	124	124	
23	6.80	50	7.9	55	3.20	118	118	
24	8.20	50	7.9	53	3.60	111	111	
25	10.0	50	7.9	50	4.00	106	106	
26	12.0	36	2.5	35	3.00	122	122	
27	15.0	38	2.5	30	3.40	115	115	
28	18.0	40	2.5	26	3.80	108	108	
29	22.0	40	2.5	24	4.90	96	96	
30	27.0	40	2.5	21	5.80	88	88	
31	33.0	41	2.5	20	6.50	83	83	3/
32	39.0	42	2.5	19	7.90	79	79	
33	47.0	44	2.5	16	9.30	69	69	
34	56.0	44	2.5	15	11.0	64	64	
35	68.0	45	2.5	13	12.0	61	61	
36	82.0	45	2.5	11	13.0	59	59	
37	100.0	40	2.5	10.5	16.8	51	51	


1/ Estimate only.
2/ Material for PIN's MIL-C-83446/26-01 through MIL-C-83446/26-25 is iron core-iron sleeve.
3/ Material for PIN's MIL-C-83446/26-26 through MIL-C-83446/26-37 is iron core-ferrite sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from the initial measurements			
Qualification inspection	Inductance	DC resistance	Self-resonant frequency	Q
	Percent		Percent	Percent
Group II	±10	±(3% +0.001 ohm)	-15	-20
Group IV	±10	±(3% +0.001 ohm)	-15	-20
Group V	±10	---	---	-20
Quality conformance inspection				
Group C				
Subgroup II	±10	±(3% +0.001 ohm)	-15	-20
Subgroup IV	±10	±(3% +0.001 ohm)	-15	-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

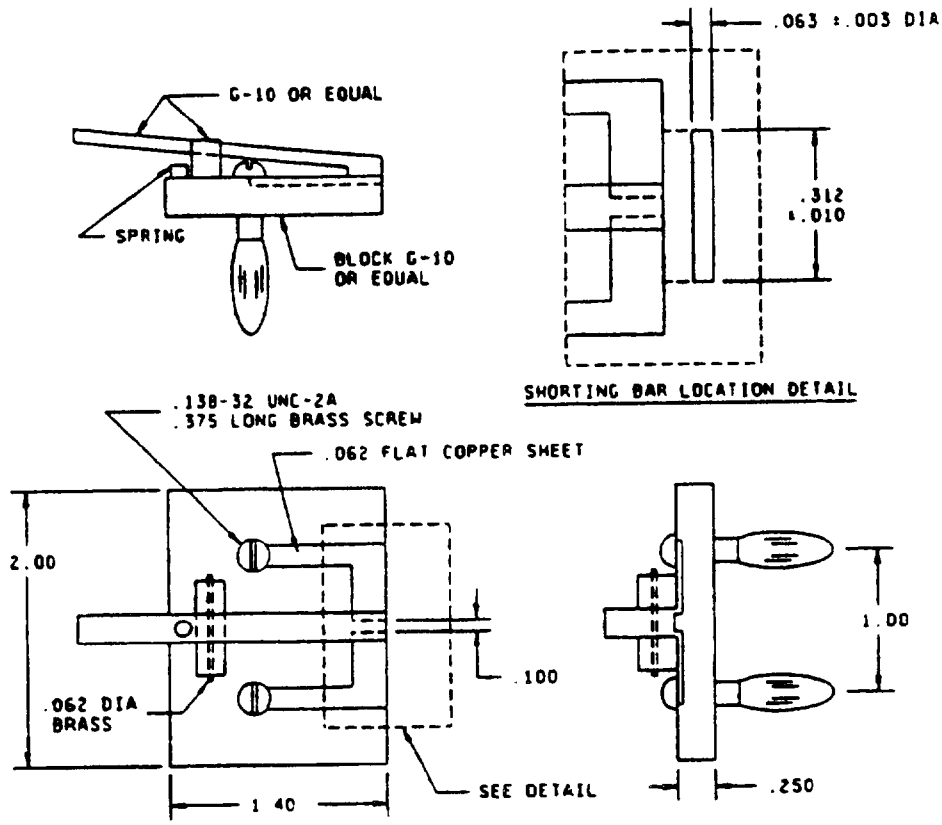



Inches	mm
.003	0.08
.010	0.25
.062	1.57
.063	1.60
.100	2.54
.138	3.51
.250	6.35
.312	7.92
.375	9.52
1.00	25.4
1.40	35.6
2.00	50.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Shorting bar material is brass.
4. The total fixture and residual inductance is approximately .049 µH (for references only).

FIGURE 2. General test fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

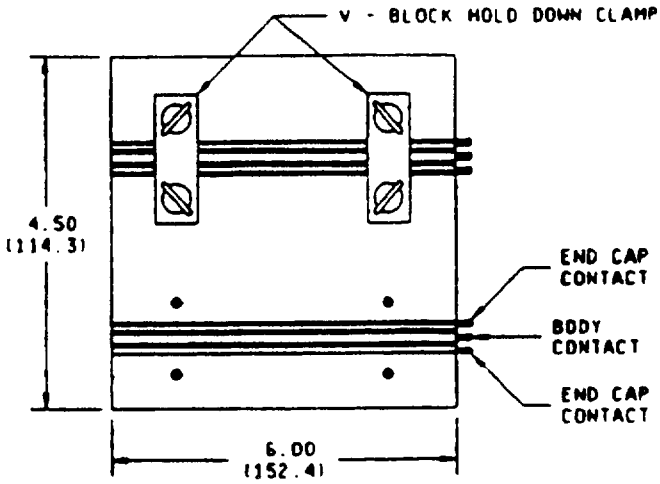

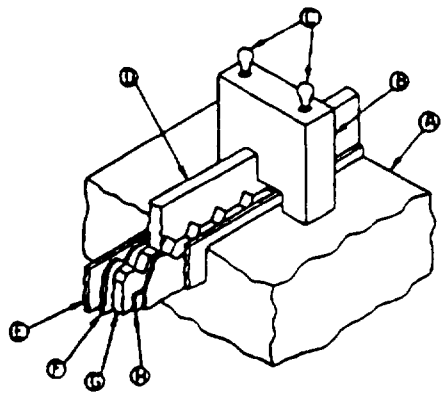

ENLARGED CUT-AWAY OF CLAMP

Legend	
Letter	Description
A	G-10 base
B	Upper V-block hold-down clamp
C	Clamp screws
D	Upper V-block (body contact)
E	End cap contact retaining wall
F	End cap contact V-block (in contact with E)
G	Lower V-block (body contact)
H	G-10 insulators (separating G from F/E)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 3. Test fixture for insulation resistance, dielectric withstanding voltage and barometric pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 19
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0840)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.