A-A-56011
16 August 1989

COMMERCIAL ITEM DESCRIPTION

HANDLE, FOLDING, MALE 90° DETENT

The General Services Administration has authorized the use of this commercial item description.

Abstract. This Commercial Item Description covers one type of handle, folding, male 90° detent.

Salient characteristics.

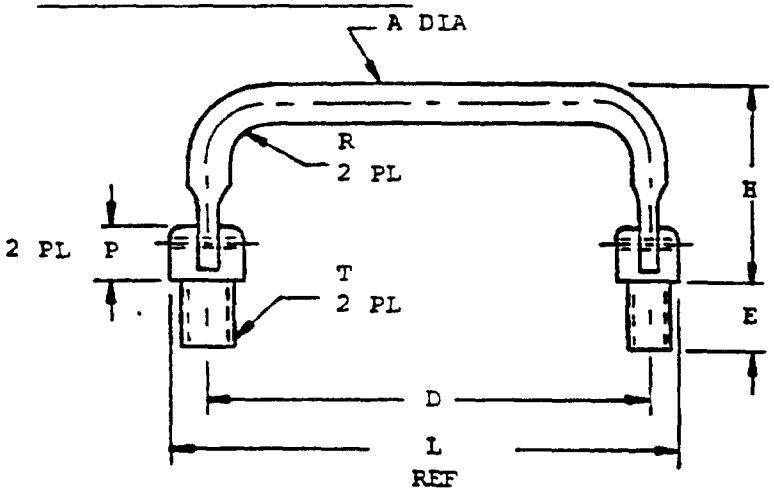


FIGURE 1

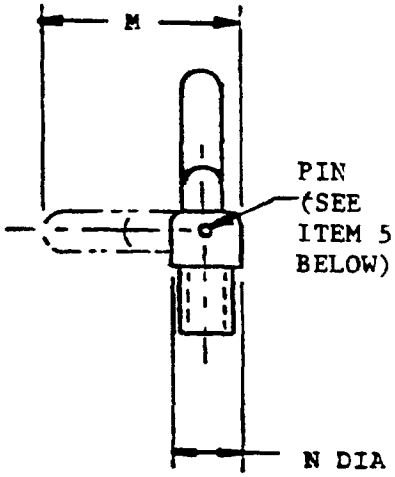


FIGURE 2

TABLE I. DASH NUMBERS

DASH No.	A	D	E	H	L	M	R	N	P	T THREADS
-101	.375	4.500	.625	2.375	5.225	2.375	.375	.625	.500	.3125-24 UNC-2A
-102	±.005	3.000		1.310	3.625	1.310	.375			
-103	.312	5.000		3.000	5.562	3.000	.312	.562		
-104	±.005	6.440		1.750	7.065	1.750				
-105			.440							

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and data which may improve this document should be sent to: Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, AL 35898-5270.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

Notes:

1. Handles shall be detent for two positions 90° apart (see figure 2).

2. Material. Aluminum type 2011-T3 per QQ-A-225/3. "O" Ring material per MIL-P-25732.

3. Protective finish. Clear anodized per MIL-A-8625, Type II, Class 1.

4. Hardware. Handles shall be supplied with unattached mounting hardware consisting of 2 internal tooth lock washers, 2 nuts, and 2 "O" Rings as follows:

Lock washers shall be phosphor bronze, nickel plated per QQ-N-290, Class 1, Type I. Nuts shall be aluminum type 2011-T3 per QQ-A-225/3, clear anodized per MIL-A-8625, Type II, Class 1. "O" Ring material as stated above.

5. Pin. Hardened Ground Production Dowel, .125 x .500 steel, per ANSI B18.8.2-1978, chromium plate per QQ-C-320 Class 1, Type II (Satin Finish) (see figure 2 above).

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.


Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Example: A-56011-101

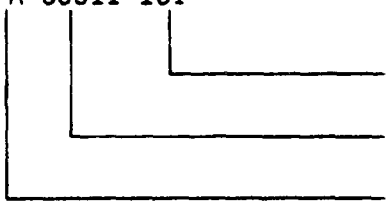

Notes.

1. Size and quantity required shall be as specified in the contract or order (see table 1).

2. FED-STD-376 is available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

Custodian:
Army - MI

Preparing Activity:
Army - MI

Project No. 5340-A045

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.