INCH-POUND

MIL-T-13906H (AL)
1 November 1993
SUPERSEDING
MIL-T-13906G (AL)
27 February 1987

MILITARY SPECIFICATION

TABLES, WORK, MAINTENANCE

This specification is approved for use within the US Army Armament Research, Development and Engineering Center, Department of the Army and is available for use by all Department and Agencies of the Departmentof Defense.

SCOPE

1.1. Scope. This specification covers work tables with laminated hard maple tops which are installed in shop sets and need for maintenance operations.

1.2. Classification. Work tables covered by this specification shall be of the following types and classes, as specified (see 6.2.1):

Type I. - Tables with drawers.

Class 1. - 26 drawers, one open shelf.
Class 2. - 23 drawers, one open shelf.

Type II. - Tables with shelves.

Class 1. - 2 open shelves.
Class 2. - 3 ope shelves.

* 2. APPLICABLE DOCUMENTS

2.1. Government documents.

* 2.1.1. Specifications, standards, and drawings. The following specifications, standards, and drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research, Development and Engineering Center, ATTN: SMCAR-EST-P, Rock Island, IL 61299-7300 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4910

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

documents shall those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-T-60 - Tape: Packaging, Waterproof

MILITARY

MIL-P-116 - Preservation Methods of

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of US Military Property
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods
MIL-STD-1190 - Minimum Guidelines for Level C Preservation, Packing and Marking

2.1.2. Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

ARMY

7541525 - Table, Work, Drawer Type
7541543 - Bottom and End Drawer
7541544 - Side Panel
7541545 - Divider
7541668 - Table, Work, Shelf -Type
7550227 - Drawer Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and other Government documents required by contractors in connection with specific acquisition funtions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2. Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specif ications, specification sheets or MS standards) the text of this specif ication shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1. First article. When specified in the contract or purchase order a sample shall be subjected to first article inspection (see 4.2.1 and 6.2.1).

3.2. Design. The work tables and all its parts shall conform to the applicable drawings specified in Table I and the requirements specified herein. All dimensions shall be maintained within the tolerances specif ied on the applicable drawings.

TABLE I. Table drawings.

Work table	Figure	Applicable drawings
Type I, Class 1	1	7541525 ad 7550227
Type I, Class 2	2	7541.525 and 7550227
Type II, Class 1		7541668-1
Type II, Class 2		7541668-2

3.3. Materials. Materials shall be as specified herein. Materials not specified shall be of quality necessary to produce a work table to meet the requirements of this specification. The approved first article will be representative of the production items and in accordance with the terms of the contract.

3.4. Construction. The work tables shall be complete and so constructed as to be capable of meeting the requirements specified for each type and class of work tables in this specif ication. The work tables shall be capable of being assembled and disassembled with common tools, and shall not require force in the fitting and alignment of components that would cause disf iguration or distortion. Construction shall be free from any characteristics and defects that will prevent a table from passing the examination of any of the tests in Section 4.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:34Z
Check the source to verify that this is the current version before use.

3.4.1. Construction details. Specific instruction details shall be applied to the respective type and class of work table.

3.6.4.1.1. Type I, classes 1 and 2. The Instruction of type I, classes 1 and 2 tables shall be in accordance with Drawing 7541525. The sheet metal used in the table construction shall be of a thickness that will enable the work table to meet the performance requirement specif ied herein. The wood top shall be bolted to the metal frame. The table shall be provided with a locking devise to hold all the drawers ad doors in place and it shall be retractable and secured under the wood top when not in use. The locking device shall be designed and constructed to snugly lock against the drawers and doors, precluding any looseness of locking pins on doors. Loose parts, such as locking pins, shall be fastened to the table with a chain. Hinged doors shall be provided for the bottom shelves. The drawers shall move freely and without interference when fully loaded. End drawers and those adjoining the center support shall not bind when fully closed. The metal end and back panels shall extend from the bottom of the lowest shelf level to 1/2 inch above the top surface of the upper shelf on both the class 1 and class 2 work tables.

3.4.1.2. Type II, classes 1 and 2. The construction of type II, classes 1 and 2 work tables shall be in accordance with Drawing 7541668-1, -2. The sheet metal used in the table constructing shall be of a thickness that will enable the work tables to meet the performance requirements specified herein. The wood top shall be holted to the metal frame. The metal enda and back panels. shall extend from the bottom level of the lowest shelf to 1/2 inch above the top surface of the upper shelf.

3.4.1.3. Drawers and dividers. The drawers of type I, classes 1 and 2 tables shall be of a welded instruction in conformance with Drawings 7550227, 7541543, 7541544, and 7541545. The sheet metal used in the drawers and dividens construction shall be of thickness that will enable the drawers and dividers to meet the performance requirements specified herein. Three dividers shall be furnished with each drawer.

3.4.2. Welding. Welding shall be employed only where it is included in fabrication of the original design.

3.4.3. Surfaces. The surface finish of all metal parts shall be smooth and free from tool marks. All edges shall be free of burrs and sharp corners.

3.4.4. Fastening devices. All screws, pins, bits, and similar parts shall be installed with means for preventing loss of tightness. All such parts when subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently deformed.

3.4.5. Threads. Screw threads shall comply with FED-STD-H28 and the applicable detailed standards referenced therein.

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:34Z
Check the source to verify that this is the currentversion before use.

3.4.6. InInterchangeability. All parts shall be manufactured to such standards as will permit replacement or adjustment without modification of parts or work table. Where practicable, all such parts shall be. permanently and legibly marked with applicable part numbers in accordance with MIL-STD-130.

3.5. Performance. The work tables shall comply with the following static proof load capacity and vibration requirements.

3.5.1. static load l The work tables shall be capable of supporting their respective proof load for a period of 24 hours. The maximum deformation (permanent set) of shelves and drawers support shall not exceed 1/16 inch (type I tables) and 1/8 inch (type II tables) from the original trammel dimensions after static load. Drawers must move freely and without interference, and the doors must open and close as designed.

3.5.1.1. Type I, classes 1 and 2proof load capacity. The type I, class 1 work table proof load is 2,400 pounds. The type I, class 2 work table proof load is 2,100 pounds. The open shelves and the shelves with hinged doors (acmes full length of table) shall be capable of supporting a proof load of 600 pounds each. The individual drawers shown in Figures 1 and 2 shall be capable of supporting the f ollowing loads:

Class A drawers - 25 pounds
Class B drawers - 50 pounds
Class C drawers- 50 pounds
Class D drawers - 100 pounds

3.5.1.2. Type II, classes 1 and 2 proof load capa ity The type II, class 1 work table proof load is 1,200 pounds. The type II, class 2 work table proof load is 1,800 pounds. Each shelf (across full length of table) shall be capable of supporting a proof load of 600 prods. All loads shall be uniformly distributed.

3.5.2. Laid vibration l The assembled work tables, loaded to their respective proof load shall be capable of withstanding vibrations (simple harmonic motion) of 1/16 inch amplitude (1/8 inch total excursion) at a frequency of 600 cycles per minute (cpm) for a period of 1 hour in the direction of the vertical axis. The worktables shall show no structural failures or defective welds. The drawers, doors, and all working component parts shall function smoothly and normally after vibration, under loaded and unloaded renditions. The maximum deformation (permanent set) of shelves and drawer supports shall not exceed 1/8 inch from the original trammel dimensions af ter this vibrationl All loads shall be uniformly distribute.

3.5.3. Trammel dimensions. Trammel points shall be establish on the table legs and shelves (see Figure 3) prior to any testing. Measurements shall be taken and recorded before loading the work table for testing. These measurements shall be repeated, with the work table unloaded, and recorded after the static load test and after the vibration test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

3.6. Detail of components. The tables Shall consist principally of wood tops and metal frames conforming to the drawings specified in Table I. The drawer arrangement and the classes of drawers required are shown in Figures 1 and 2. The different classes of drawers and dividers for the type I work tables shall conform to Drawings 7550227, 7541543, 7541544, and 7541545.

3.6.1. Table tops. The table tops shall be made from vertically laminated strips of hard maple, laid edge grain up. The table top shall be commercially available, 1-3/4 inches thick with a clear lacquer, enamel or polyurethane finish on all sides. There shall be no knots less than 1/2 inch from the outside edge of front and back face strips. Strips shall not exceed 3 inches in width. The strips shall be free from decay, splits, warp, decayed-thru knots and grain slope exceeding 1 inch in 10 inches. Scattered sound knots not exceeding 1 inch in length and not less than 12 inches apart will be permitted on the top surface of the strips. The mating surfaces of the strips shall be glued with a moisture resistant glue. Butt-end joints or finger-end joints shall be permitted on the inner strips only. The working surface of the table top shall be flat and uniform in a true plane to within 1/16 inch between any two points that are 24 inches apart. The table top shall be securely bolted to the metal frame as shown in the applicable drawing specified in Table I. When specified (see 6.2.1), table top tie-bars shall be required as indicated on Drawing 7541525.

3.6.2. Table legs and supports. The table legs and supports shall beef sufficient strength to enable the work tables to meet the performance requirements specified herein. They shall have sufficient rigidity and floor bearing area to withstand handling of the work table without damage to any components by lifting, pushing, or sliding of the table. All handling tests shall be with the table unloaded. Each leg shall be provided with means for securing for work table to a van floor with bolts as specified in the applicable drawing (see Table I).

3.7. Protective finish. The protective finish for metal surfaces shall be paint. All surfaces to be painted shall immediately prior to painting, be cleaned and dried free from all foreign matter. The protective paint coating shall be no less than 0.002 inch thickness. The adhesion of the paint shall prevent any peeling of paint when removing fiber glass tape applied over two intersecting cuts in the paint, the cuts being not less than 2 inches in length and through the paint thickness to the base metal and wood top. The surface hardness of the paint shall be in accordance with the industrial practice of checking with pencil lead and shall be within the range of H to HB lead.

3.8. Identification marking The work tables shall be marked for identification in accordance with MIL-STD-130 and shall include the National stock Number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

3.9. Workmanship. Work tables shall be processed in such a manner to be free from cracked or misplaced parts, sharp edges, burrs, defective parts, and other defects which will affect life, servicability, or appearance.

4.1. Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspection Set forth in the specification where such inspections are deemed necessary to assupplies and services conform to prescribed requirements.

4.1.1. Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective materiel, either indicated or actual, nor does it commit the Government to acceptance of defective materiel.

4.2. Classification of inspections. The inspection requirements specified herein are classified as follows:

(a] First article inspection (see 4.2.1).
(b) Quality conformance inspectiion (see 4.2.2).

4.2.1 First article inspection. When specified (see 6.2.1), first article inspection shall be applied to the preproduction model or initial production item noted in 3.1. The type II work table (which is normally shipped disassembled) shall be assembled for first article inspection only. Unless otherwise specified (see 6.2.1), first article inspection shall consist of the examination in 4.3 and all tests under 4.4. Failure of the first article to pass the examination or any of the tests shall be cause for rejection. Failure of any subsequent production item be identical to the approved first article shall be cause for rejection of the item.

* 4.2.2. Quality conformance inspection. Unless otherwise specified (see 6.2.1), quality conformance inspection shall be applied to production units offered for acceptance under the contract. Quality conformance inspection shall consist of (a) through (e) as follows, and failure of any unit to pass an examination inspection shall be cause for rejection of the unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

(a) Product examination (see 4.3).
(b) Static load (see 4.4.1).
(c) Loaded vibration (see 4.4.2).
(d) Paint test (see 4.4.3).
(e) Packaging inspection (see 4.5).

4.2.3. Sampling. Sampling for quality conformance inspection shall be performed as listed with all samples selected randomly (see 6.2.1).

Inspection or Test	Lot or Batch Size	Sample Size
Product examination (4.3)	1-90	13
static load (4.4.1)	1-90	1/
Loaded vibration (4.4.2)	1-90	1/
Paint test (see 4.4.3)	1-90	3
Packaging inspection (4.5)	1-90	3

1/ Select one table from first ten tables. No failures allowed.

The lots shall not exceed the maximum sizes indicated above. If lot size is less than or equal to sample size, 100 percent inspection is required. Each lot shall be accepted with no defects and rejected if one or more defects are found.

* 4.3. Product examination. Visually, dimensionally, and manually examine each table to determine conformance with the requirements of 3.2 through 3.4.6.3.6 through 3.6.2. 3.8 and 3.9. Visual examination shall include verification of completeness of manufacture and assembly, conformance to specified standards, adequacy of marking, proper cleaning, and freedom from the identified defects. Dimensional examination h.eludes measuring dimensions as specified. Manual examination shall include the operation of movable parts by hand to assure proper functioning. The examination provisions may be applied at the earliest practical point is manufacture at which it is feasible to inspect for acceptance without risk of change in the characteristic by subsequent operations. Failure of the contractor to provide objective evidence that the item and its components has passed the examinations prescribed for them by the contractor's inspection system shall be cause for rejection. In addition, failure of the contractor to provide objective evidence that all parts are manufactured to definite standards, clearances and tolerances so that no replacement part will degrade the fore, fit, or function of the end item (see 3.4.6), shall be cause for rejection.

4.4. Test methods. Prior to subjecting the work table to tests, a pattern of trammel points shall be established as illustrated in Figure 3 (see 3.5.3). These points shall be measured and recorded as the original dimensions.

4.4.1. static load. The assembled work table shall be loaded to the applicable proof load capacity specif ied in 3.5.1.1 or 3.5.1.2, using shot bags to distribute a uniform load over the shelf area, and in the type I table

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

drawers. It is recommended that No. 40 shot be used for filling the necessary shot bags. The table shall remain static loaded for a period of 24 hours. The work table shall then be unloaded and examined for damage and to determine conformance with the requirements specified in 3.5.1

4.4.2. loaded vibration. The assembled work table shall be rigidly fastened to the vibration machine through its mounting holes. The work table shall then be loaded as specified in 4.4.1. When loaded, the table shall be subjected to vibration with an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency of 600 cpm for a period of 1 hour in the direction of the vertical axis. After vibration, the table shall be unloaded and examined for evidence of damage to determine compliance with 3.5.2.

4.4.3. Paint test. A test sample, made of the same metal as the production item, shall be tested for paint adhesion, hardness, and thickness. The sample shall receive the the same surface treatment, the same thickness of paint, and be painted at the same time with the same paint as the production item. The test are described in a, b, and c below. The criteria for rejection are given in paragraph d.

(a) Two intersecting straight lines, approximately two inches long, shall be cut through the point to the base metal of the test sample. A strip of 1/2 inch wide fiberglass tape shall be pressed over the intersection and then pulled from the surface.

(b) The sharpened leads of an Hand an HB wooden lead pencil shall be pressed vertically onto the painted surface until the leads crumble or break. The surface shall be cleaned and examined.

(c) The thickness of the unpainted test sample shall be measured and recorded to an accuracy of 0.0002 inch. The measured value shall be used in the calculation of final paint thickness.

(d) A paint thickness of less than 2.0 mils (0.0020), or an indentation caused by the HB lead, or no indentation left by the H lead, or evidence of any paint loss due to removal of the fiberglass tape, shall be cause for rejection (see 3.7).

4.5. Packaging inspection. unless otherwise specified in the contract, the tables shall be inspected before and after packaging to determine compliance with the preservation, packaging, packing and marking requirements specified in Section 5.

5. PACKAGING

5.1. Preservation. Preservation shall be level A or C, as specified (see 6.2.1).

5.1.1. Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

* 5.1.1.1. Disassembly. When practical, items shall be disassembled to afford protectiotn of components, attachments, and accessories against damage, pilferage and to reduce cubae, Disassembled parts shall be clearly and legibly marked as to identity and proper location on the assembled item and matchmarked when necessary to facilitate reassembly. Removed parts and mating parts on the item shall be matchmarkedby stenciling on the part or by the use of tags. Tags shall be waterproof and ink used shalbe waterproof. Tags shall be firmly secured to each individual part. All fasteners removed during disassembly shall be reinstalled in one of the mating parts. A part shall not be disassembled unless it can be readily assembled in the field without special skills or tools.

* 5.1.1.2. General requirements. Thorough cleaning and drying of all bare surfaces is essential before the application of a preservative. Cleaning, drying and application of preservatives shall progress in an uninterrupted series of operations. When periods of interruption are necessary, temporary protection shall be provided to partially processed items, as required, to insure against contamination. The materials used in cleaning, drying and preservation shall not be injurious to the shelving and worktables.

* 5.1.1.3. Cleaning and drying. Component parts, disassembled parts, attachments, accessories, assembly, hardware and small miscellaneous parts Shall be cleaned, dried, preserved, packaged and packed like the basic unit and as specified herein. Cleaning shall be in accordance with method C-1 of MIL-P-116 except that no class 1 ozone depleting substances such as 1.1.1 trichloroethane, chlorofluorocarbons, halons or carbon tetrachloride shall be used. Drying shall be accomplished by any applicable means stated in MIL-P-116.

* 5.1.1.4. Preservation. Immediately after cleaning and drying, surfaces that are subject to corrosion or deterioration shall be treated with a P-type preservative. Preservation shall be in accordance with any applicable method of MIL-P-116 except that preservative such as P-6 shall not be used. Excessive use of preservative compounds shall be avoided. Preservative compounds shall not be applied to plastic, corrosion resistant metal, or metal that is treated or painted to resist corrosion.

* 5.1.1.5. Technical data. Technical data furnished shall be placed in a waterproof, greaseproof bag, sealed and and attached to the table or placed in the box containing the table.

5.1.1.6. Locks and keys The interior of the locks shall be mated with dry lubricant and operated to assure penetration of the lubricant. The locks with keys attached shall be placed in waterproof, greaseproof bag sealed and attached in a conspicuous place to the worktable with tape conforming to PPP-T-60.

5.1.2. Level c. Worktables and shelving shall be preserved in accordance with MIL-STD-1190.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:34Z
Check the source to verify that this is the current version before use.

5.2. Packing. Packing shall be Level A, B, or C as specified (see 6.2.1)

* 5.2.1. Level A. Before being packaged in the shipping container Cushioning shall be applied to prevent marring, puncturing, damage or any abrasive action to the finished surfaces or protruding parts, also cushioning shall be placed across the front of the drawers to prevent their movement. All cushioning material shall be secured by taping or trying to prevent any possibility of shifting or becoming detached during transit and storage. Cushioning material shall be at least 3/4 inch thick, fabricated in the form of pads or blankets, and made of fiberboard Disassembled parts, accessories and attachments, shall be consolidated, cushioned to prevent damage and packed in fiberboard boxes conforming to PPP-B-636 class WWVR. Federal Specification identified as MMM-A-250 in Federal Specification PPP-B-636 is not authorized for use. The boxes shall be sized to fit the parts being packed. Size and weight limitations of the container specification shall apply.

* 5.2.2. Shipping container The unit and its associated item shall be packed in a shipping container conforming to PPP-B-601 or PPP-B-621, Overseas type. Selection shall be governed by the size and weight limitations Of the container specification. The shipping container shall be provided with forklift capabilities. Each Shipping container shall contain only one unit and all associated items.

* 5.2.3. Level B. Unless otherwise specified, Level B requirements will be the same as Level A, except the shipping container shall be of the domestic type.

* 5.2.4. Level C. Worktables and shelving shall be packed in accordance with the requirements of MIL-STD-1190.

5.3. Marking. Marking shall be in accordance with MIL-STD-129. Special markings shall be as required by contract or purchase order.

* 5.4. Contents. For the intermediate and shipping containers the arrangement of contents, cushioning, anchoring, blocking and bracing shall be in accordance with MIL-STD-1186 except "delete 'MIL-P-19644' in paragraph 5.3.3 and delete 'or P-1 of MIL-P-116' in paragraph 5.4.1".

* 5.5. Workmanship. inequality of work shall be such that when proper procedure is followed, materials and equipment being processed will be provided the maximum protection against corrosion and deterioration consistent with the shipment hazards known or anticipate, and suitable for long term storage.

6. NOTES

6.1. Intended use. The work tables covered by this specification are intended for use in shop van vehicles to provide storage spare and a working surf ace for maintenance crews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

6.2. Ordering data.

* 6.2.1. Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Type and class of work table as required (see1.2).
(c) First article, when required (see 3.1).
(d) Table top tie-bars when required (see 3.6.1).
(e) First article inspection, if different (see 4.2.1),
(f) Level of preservation and packing (see 5.1 and 5.2).

6.2.2. Contract data requirements. Required technical data such as operator's manuals, parts lists, and other instructions for operations and maintenance, as identified on a numbered DD Form 1664, should be specified on a DD Form 1423 incorporated in the contract.

6.3. subject term (key word) listing.

AMSC number
Protective finish
Table tops
welding

6.4. Changes from pervious issue l The margins of this specification are marked with an asterick to indicate where changes (additions, modifications, corrections, deletions) for the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the magrinal notations relationship to the previous issue.

Custodian:
Army - AL

Review Activities:
Army - MI, CS

Preparing Activity:
Army - AL

Reject No. 4910-A723

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:34Z
Check the source to verify that this is the current version before use.

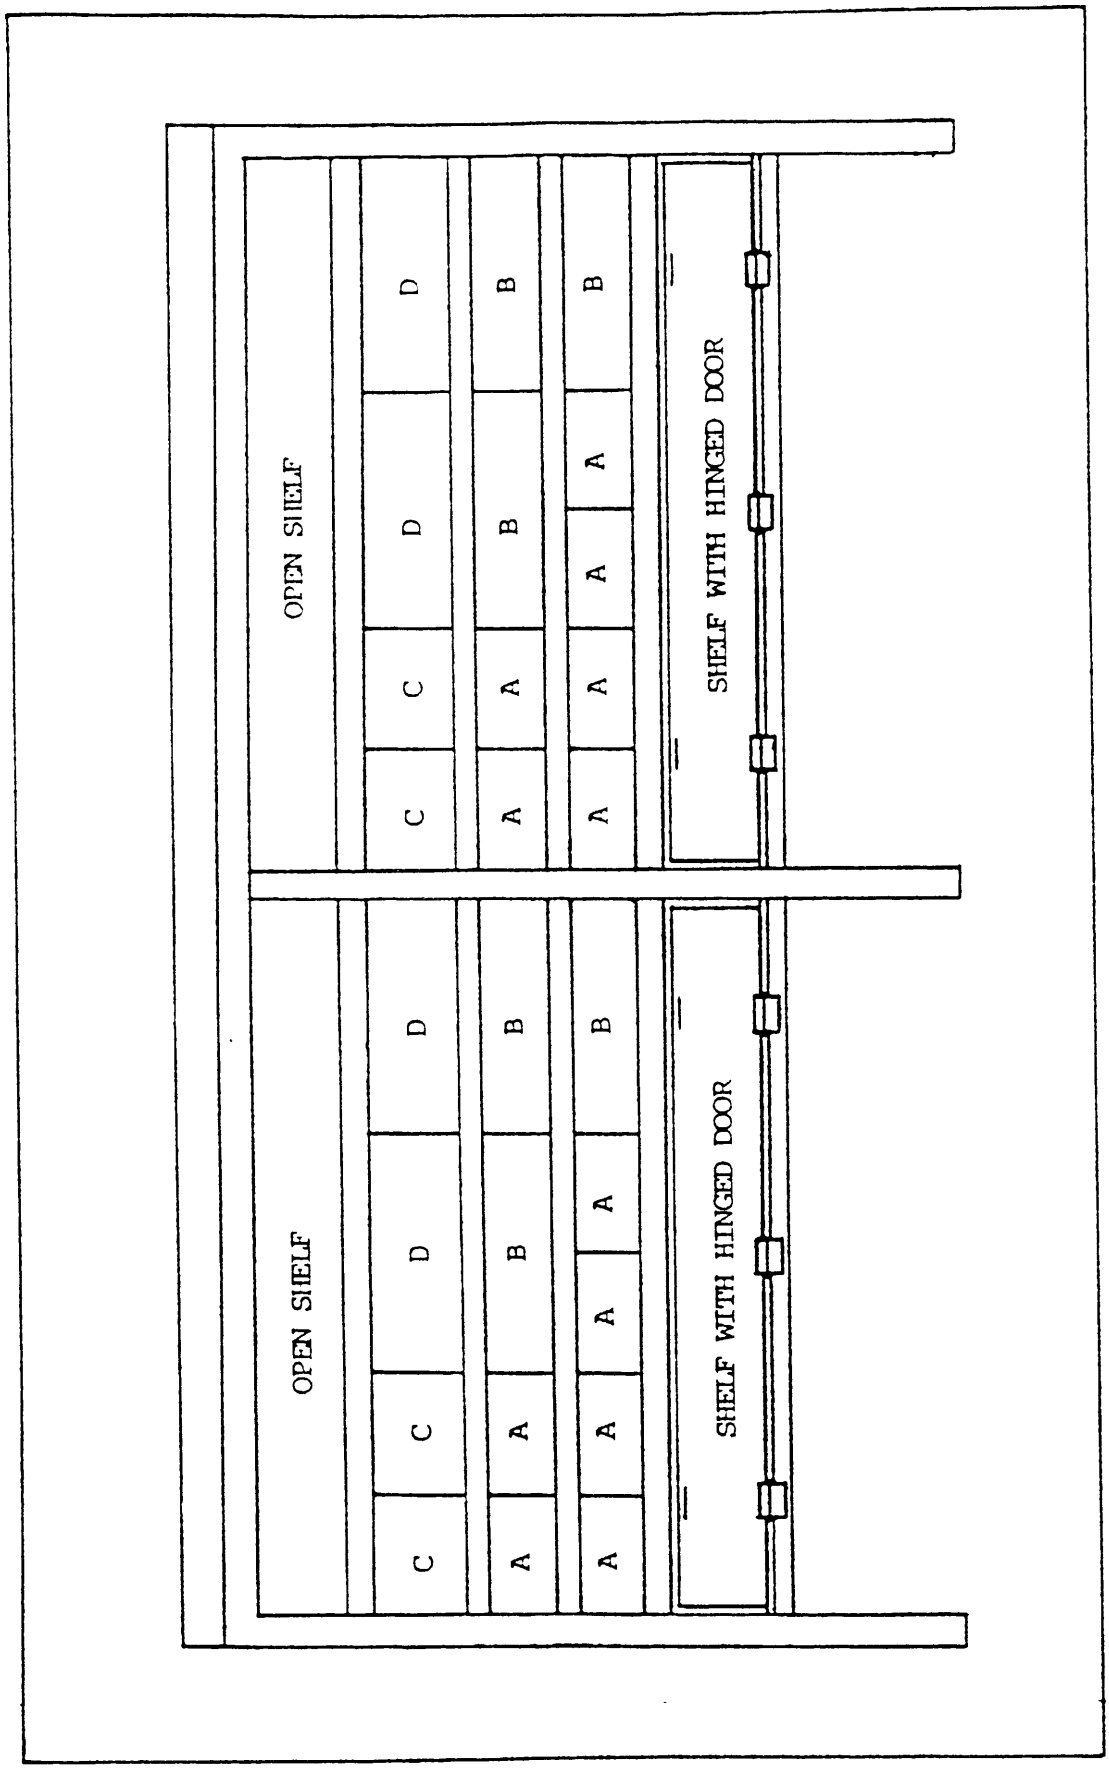


FIGURE 1. Type I, Class 1

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:34Z
Check the source to verify that this is the current version before use.


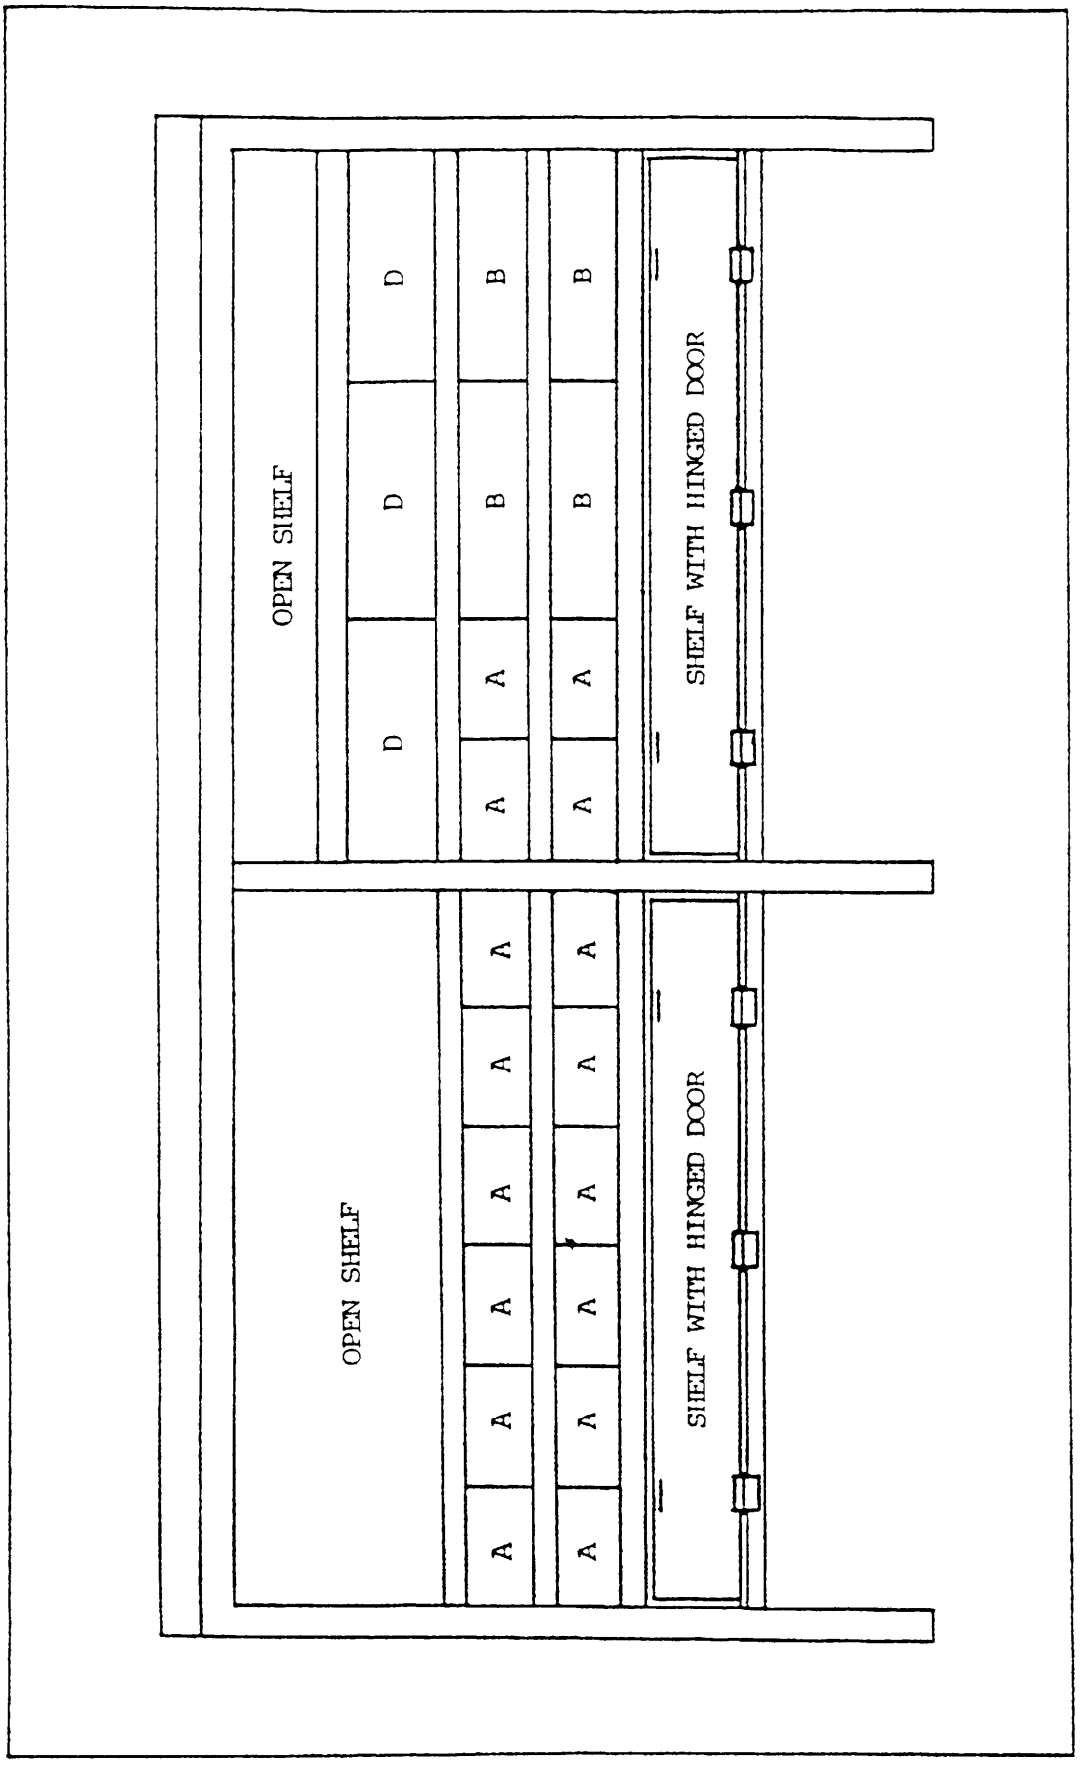


FIGURE 2. Type I, Class 2

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:34Z
Check the source to verify that this is the current version before use.

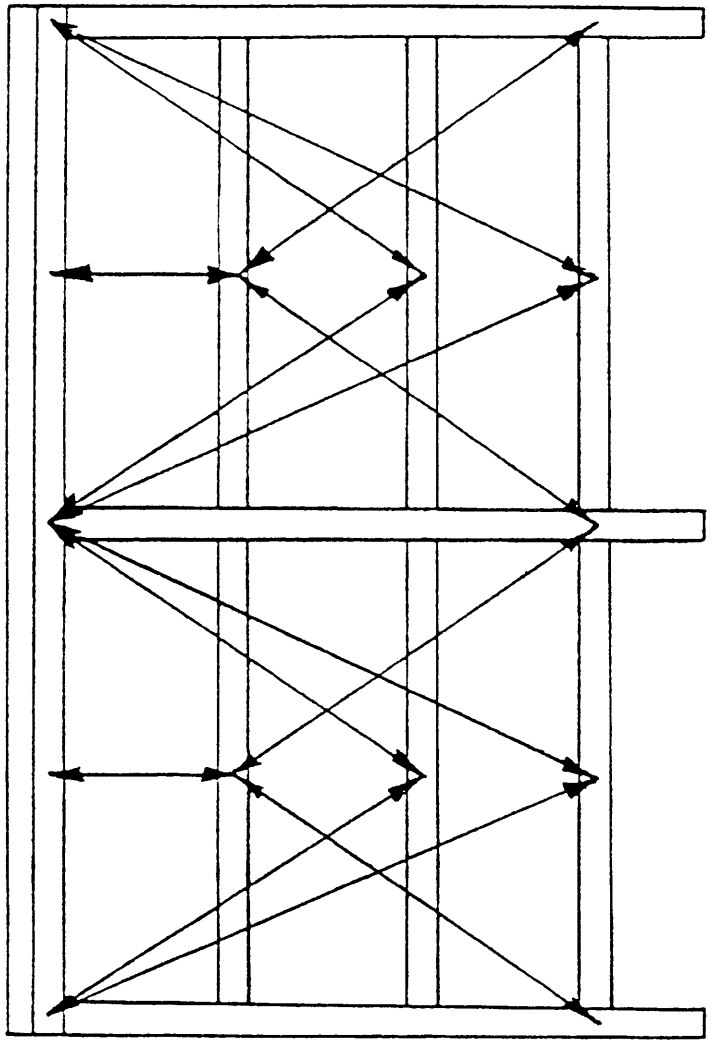

NOTE: This figure represents a general pattern for establishing trammel points on the front of a work table (for inspection purposes only). Each type and class work table will require a different pattern because of its design.

FIGURE 3. Example of Trammel Dimensioning

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:34Z
Check the source to verify that this is the current version before use.