INCH-POUND
MIL-PRF-3098/25F
19 December 2003
SUPERSEDING
MIL-PRF-3098/25E
27 August 1997

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR46/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 200 kHz to 550 kHz; fundamental; noncontrolled; antiresonance.

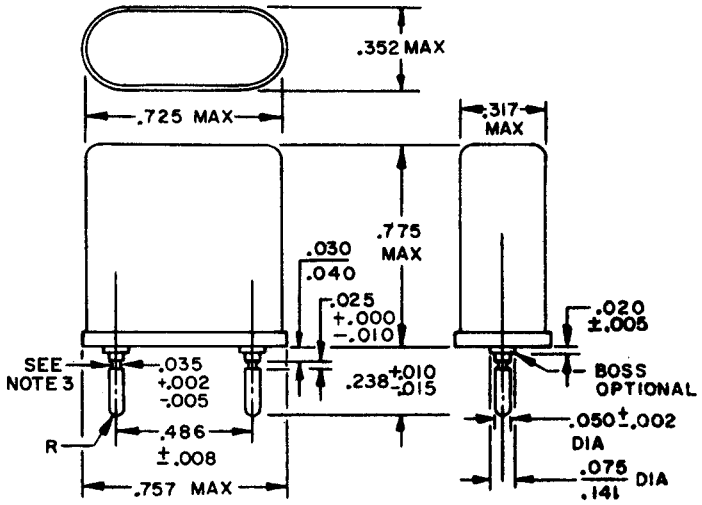

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	.05	.020	.51	.050	1.27	.352	8.94
.005	.13	.025	.64	.075	1.91	.486	12.34
.008	.20	.030	.76	.141	3.58	.725	18.42
.010	.25	.035	.89	.238	6.05	.757	19.23
.015	.38	.040	1.02	.317	8.05	.775	19.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR46/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 200 kHz to 550 kHz, inclusive.

Frequency tolerance (operating temperature range): ±100 parts per million (ppm).

Equivalent resistance: See table II.

Mode of oscillation: Fundamental.

Antiresonance, load capacitance: 20 pF ±0.5 pF.

Operating temperature range: -40°C to +85°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Shock (specified pulse):

Frequency change permitted: ±10 ppm.

Equivalent resistance change permitted: ±15 percent.

Vibration: Method 201 of MIL-STD-202, amplitude 0.015 inch (total excursion 0.030 inch).

Frequency change permitted: ±10 ppm.

Equivalent resistance change permitted: ±15 percent.

Temperature run:

Frequency change permitted: ±10 ppm.

Equivalent resistance change permitted: ±15 percent.

Bond strength: See table I.

TABLE I. Bond strength.

Frequency range, inclusive (kHz)	Grams, minimum
200 to 250	700
250+ to 320	500
320+ to 370	400
370+ to 435	300
435+ to 550	250

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:23Z
Check the source to verify that this is the current version before use.

TABLE II. Equivalent resistance.

Frequency range, inclusive	Maximum Resistance
kHz	Ohms
200 to 225	5,300
225+ to 275	6,000
275+ to 325	6,500
325+ to 375	7,000
375+ to 425	7,500
425+ to 475	8,000
475+ to 500	8,500
500+ to 550	5,000

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0749-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:23Z
Check the source to verify that this is the current version before use.