INCH POUND
MIL-PRF-3098/30E
27 August 1997
SUPERSEDING
MIL-C-3098/30D
23 June 1975

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR52A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 10 MHz to 61 MHz; third mechanical overtone; noncontrolled; series resonance.

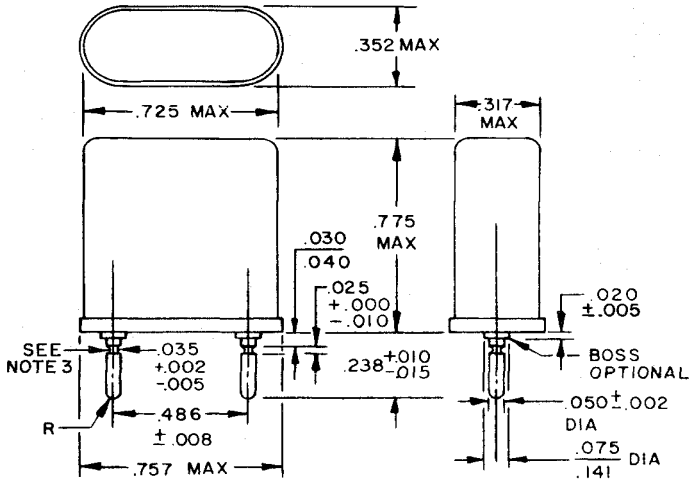


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .002 | .05 | .020 | .51 | .050 | 1.27 | .352 | 8.94 |
| .005 | .13 | .025 | .64 | .075 | 1.91 | .486 | 12.34 |
| .008 | .20 | .030 | .76 | .141 | 3.58 | .725 | 18.42 |
| .010 | .25 | .035 | .89 | .238 | 6.05 | .757 | 19.23 |
| .015 | .38 | .040 | 1.02 | .317 | 8.05 | .775 | 19.69 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR52A/U.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 10 MHz to 61 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance (operating temperature range): ±50 parts per million (ppm).

Equivalent resistance: 40 ohms, maximum.

Mode of oscillation: Third mechanical overtone.

Operating temperature range (noncontrolled): -55°C to +105°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Temperature run:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0697-14)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.