INCH POUND
MIL-PRF-3098/30G
05 March 2010
SUPERSEDING
MIL-PRF-3098/30F
19 December 2003

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR52/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-3098.

Pertinent characteristics: 10 MHz to 61 MHz; third mechanical overtone; noncontrolled; series resonance.

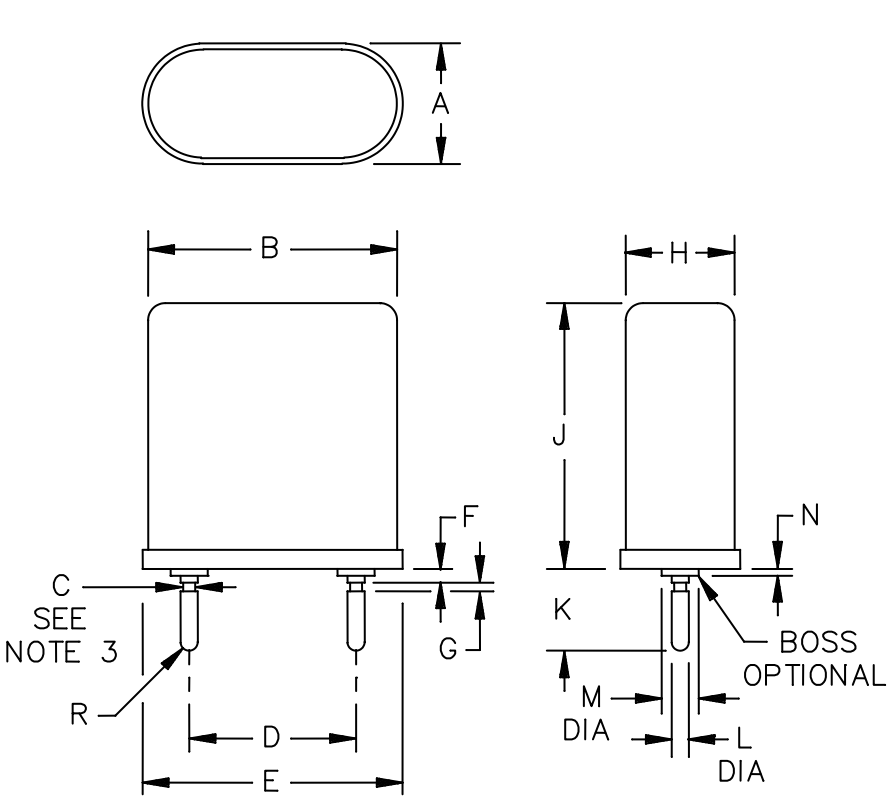



FIGURE 1. Crystal unit - CR52/U.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.

| Ltr | Inches | | mm | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | --- | .352 | --- | 8.94 |
| B | --- | .725 | --- | 18.42 |
| C | .030 | .037 | 0.76 | 0.94 |
| D | .478 | .494 | 12.14 | 12.55 |
| E | --- | .757 | --- | 19.23 |
| F | .030 | .040 | 0.76 | 1.02 |
| G | .015 | .025 | 0.38 | 0.64 |
| H | --- | .317 | --- | 8.05 |
| J | --- | .775 | --- | 19.69 |
| K | .223 | .248 | 5.66 | 6.30 |
| L | .048 | .052 | 1.22 | 1.32 |
| M | .075 | .141 | 1.91 | 3.58 |
| N | .015 | .025 | 0.38 | 0.64 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR52/U - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 10 MHz to 61 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance (operating temperature range): ±50 parts per million (ppm).

Equivalent resistance: 40 ohms, maximum.

Mode of oscillation: Third mechanical overtone.

Operating temperature range (noncontrolled): -55°C to +105°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Temperature run:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm

Part or Identifying Number (PIN): CR52/U (followed by specified frequency), see 1.2 of MIL-PRF-3098.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-3098, this document references the following:

MIL-STD-202.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air force - 99
DLA - CC

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 19, 84

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-2009-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:24Z
Check the source to verify that this is the current version before use.