INCH POUND

MIL-PRF-3098/32E
27 August 1997
SUPERSEDING
MIL-C-3098/32D
23 June 1975

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR54A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 50 MHz to125 MHz; fifth mechanical overtone; noncontrolled; series resonance.

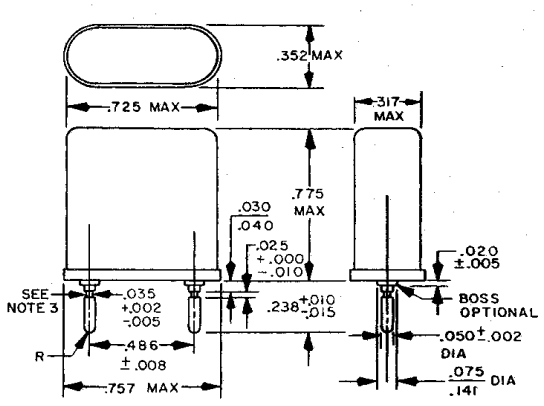

Inches	mm	Inches	mm
.002	.05	.050	1.27
.005	.13	.075	1.91
.008	.20	.141	3.58
.010	.25	.238	6.05
.015	.38	.317	8.05
.020	.51	.352	8.94
.025	.64	.486	12.34
.030	.76	.725	18.42
.035	.89	.757	19.23
.040	1.02	.775	19.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR54A/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 50 MHz to 125 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerance: ±50 parts per million (ppm).

Equivalent resistance: 50 MHz to 90 MHz: 50 ohms, maximum.
90+ MHz to 125 MHz: 60 ohms, maximum.

Mode of oscillation: Fifth mechanical overtone.

Temperature range:

Operating (noncontrolled): -55°C to +105°C, inclusive.

Calibration values:

Resistance: 60 ohms.

Voltage drop: 0.35 volt.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Shock: (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Temperature run:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:25Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0697-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:25Z
Check the source to verify that this is the current version before use.