INCH-POUND

MIL-C-3098/34F
1 November 1993
SUPERSEDING
MIL-C-3098/34E
9 November 1983


MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR56/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 50 to 125 MHz; *fifth overtone; noncontrolled; series.*

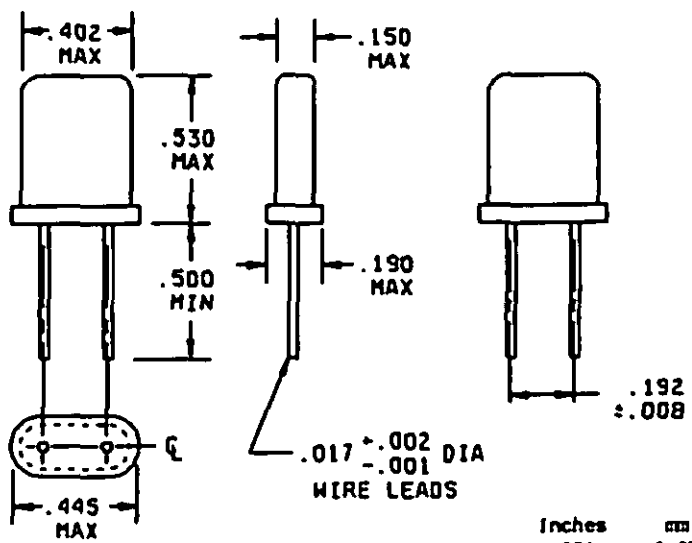

Inches	mm	Inches	mm
.001	0.03	.192	4.88
.002	0.05	.402	10.21
.008	0.20	.445	11.30
.017	0.43	.500	12.70
.150	3.81	.530	13.46
.190	4.82		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-C-3098.
4. The type-designation, frequency, and code-designation characters shall be not less than .038 (0.97 mm) in height and not less than .027 (0.69 mm) in width.
5. If the HC-43 holder is used the crystal unit shall not be trimmed after cold-welding.

FIGURE 1. Crystal unit - CR56/U.

DISTRIBUTION STATEMENT A. Approved *for public release;* distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-18/U (MIL-H-10056/9) or HC-43/U (MIL-H-10056/30) or HC-49/U (MIL-H-10056/36).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 50 to 125 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerances:

Operating temperature range: ±50 ppm.

Equivalent resistance:

MHz	Ohms, maximum
50 to 90	50
90+ to 125	60

Mode of oscillation: Fifth mechanical overtone.

Operating temperature ranges: -55°C to +105°C, inclusive.

Drive level, rated: 2.0 ±0.4 mW.

Shock: (specified pulse)

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

NOTE: NATO preferred type NXT19.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 99
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0681)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:26Z
Check the source to verify that this is the current version before use.