A-A-50438
26 March 1991

COMMERCIAL ITEM DESCRIPTION

CLEANER, BLOWER AND VACUUM, PORTABLE, INDUSTRIAL

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-C-21101, which is canceled.

Abstract. This commercial item description covers industrial type blower and vacuum cleaners intended primarily for cleaning and drying electric equipment. Blower and vacuum cleaners shall be of the following types:

Type HV1 - High velocity, 115 Vac, 60 Hz.
Type LV1 - Low velocity, 115 Vac, 60 Hz.
Type MV1 - Medium velocity, 115 Vac, 60 Hz.
Type MV2 - Medium velocity, 220 Vac, 50 Hz.

Salient characteristics.

1. The cleaner shall be constructed of the type of materials that allow for the highest quality of performance.

2. The cleaner shall conform to Underwriters Laboratory Standard UL 1017.

3. The motors shall be of the universal type and able to operate continuously at 40°C ambient temperature. The motor shall be provided with a guarded enclosure. The cleaner shall conform to the characteristics outlined in table I.

4. The cleaner shall operate on a ungrounded electrical distribution system (shipboard use) such that an electrical shock hazard is not introduced.

5. At normal full load operating conditions, the radio-frequency and low-frequency noise interference shall not exceed the limit specified for class IIB equipment of MIL-STD-461. The mounting of the noise suppression accessories shall be such that an electrical shock hazard is not introduced.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, Naval Sea Systems Command, Attn: 55Z3, Washington, DC 20362-5101.

AMSC N/A FSC 7910

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Table I. Cleaner characteristics.

Item	Type HV1	Type MV2	Type LV1	Type MV1
Voltage, a.c. and d.c.	115	220	115	115
Frequency, hertz (Hz)	60	50	60	60
Input watts, maximum	1,000	500	350	500
Air discharge (at nozzle), minimum, cubic feet per minute (cfm)	75	55	45	55
Switch, number of positions	2	2	2	2
Inside diameter of discharge nozzle, inch	3/4	3/4	3/4	3/4

6. The cleaner shall have a two position switch (on, off) for operating the cleaner which shall be mounted integral with the unit, shall be convenient and reliable for operation and of quick-break design.

7. The cleaner shall operate as a blower as well as a vacuum cleaner.

8. The cleaner shall have either a 15 foot or 50 foot power cable, as specified in the ordering data.

9. The cleaner shall have a tapered, round, removable, nonconducting, discharge nozzle with an inside diameter as specified in table I.

10. The cleaner shall be provided with a scrap collection device of such construction as to prevent objects being drawn into the impeller with resultant damage to the impeller or impeller housing, or being thrown into the dust collection bag so as to penetrate the bag, thus creating a personnel safety hazard. The device shall be able to be attached to the intake side of the cleaner, and shall collect objects or hardware before they enter the impeller housing, while allowing the dust and air to pass into the dust collection bag.

11. When specified in the ordering data, attachments shall be supplied, as specified in table II.

12. Two copies of the manufacturer's standard operating and maintenance instructions shall be packed with each cleaner. Included with the manuals shall be a complete factory part lists and a list of all available accessories. The parts list should be annotated to show which parts can be purchased separately as repair parts.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:42Z
Check the source to verify that this is the current version before use.

Table II. Attachments.

Item	Length Inches	Diameter Inches	Width Inches	Quantity per cleaner	To be supplied with type
Length of oil resistant hose	48	1-1/2	--	1	LV1, HV1, MV1 MV2
Hose connection (suitable for use on either blower or vacuum end)	--	---	--	1	LV1, HV1, MV1, MV2
Dustproof bag, including connections	--	---	--	2	LV1, HV1, MV1, MV2
Flat nozzle noncon-ducting)	--	---	--	1	LV1, HV1, MV1, MV2
Shoulder strap	--	---	--	1	LV1, HV1, MV1, MV2
Wall brush (for attachment to metal nozzle)	--	---	5	2	LV1, HV1, MV1, MV2
Metal nozzle	--	---	5	1	LV1, HV1, MV1, MV2
Spray attachment (1 quart capacity, for varnishes, paints, & cleaning fluid)	--	---	--	1	LV1, HV1, MV1, MV2
Round brushes	--	3	--	2	LV1, MV1, MV2
Round brush, 45° bend	--	3	--	2	HV1
Length of oil resistant hose with swivel	120	1-1/2	--	1	HV1
Extension piece (nonconducting)(in 2 pieces)	46	1-1/2	--	1	HV1
Electronic equipment cleaning brush, small arc type	--	---	--	2	HV1
Electronic equipment cleaning brush (for confined places), toothbrush type	--	---	--	2	HV1
Insulated cleaning brush	4		2	2	HV1

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.


1. Ordering data. Procurement documents should specify the following:

   (a) Title, number, and date of this commercial item description.
   (b) Type of cleaner required.
   (c) Length of cord required, 15 or 50 ft.
   (d) User option - whether cleaners without attachments are required.
   (e) Special marking(s), if required.

MIL-STD-461 and FED-STD-376 are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

UL 1017 is available from Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062.

Certification number. Each type and configuration of cleaner shall be identified by an ID number in the following format:

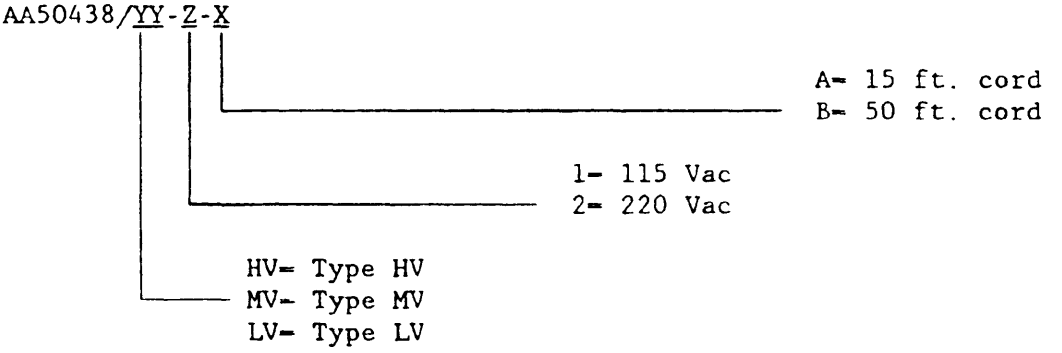

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:42Z
Check the source to verify that this is the current version before use.

The ID no. can be included on the identification plate of the cleaner and/or the enclosure of the cleaner.

MILITARY INTERESTS:

Custodians
Army - GL
Navy - SH
Air Force - 84

Review activities
Army - ME, CR, ER
Navy - YD
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

Preparing activity:
Navy - SH
(Project 7910-0079)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.