A-A-50469A
September 8, 1989
SUPERSEDING
A-A-50469
June 1, 1983

COMMERCIAL ITEM DESCRIPTION

HOOK, REGULAR EYE, LATCH TYPE

The General Services Administration has authorized the use of this commercial item description in preference to style B, type I, class I of the Military Specification MIL-H-19253C.

Abstract. This commercial item description (CID) applies to latch type hooks that support a load in a direct-pull configuration, and such load is carried in the base (bowl-saddle) of the hook. The hook is intended for use in material handling operations.

Salient characteristics:

1. Requirements. Hoist hooks shall be as specified herein and shall be in accordance with the basic requirements shown in table I for the rated capacity and throat openings. Hooks of a rated capacity greater than specified in this table will be acceptable provided they meet all other requirements. The hook shall have a latch type closure device to bridge the throat opening of the book. The hook shall be constructed with a fixed lifting eye in the same plane as the throat opening.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. any data which may improve this document should be sent to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000.

FSC 4030

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

TABLE I. Basic requirements.

Rated capacity Short tons (2,000 pounds)	Inside eye diameter (minimum) (inches)	Throat opening w/latch (minimum) (inches)
1.5	0.875	0.875
2.0	1.125	0.937
2.5	1.250	1.000
5.0	2.000	1.688

2. Material. The hooks shall be constructed conforming to the requirements specified herein. The hook material shall have sufficient ductility to permanently deform before failure. The hook shall be zinc-coated in accordance with the manufacturer's standard practice.

3. Defects. There shall be no defects when magnetic particle inspected over the entire area of the hook in accordance with ASTM A 275, Magnetic Particle Examination of Steel Forgings. A defect is defined as a linear indication revealed by magnetic particle inspection that is greater than 0.125 inch long and whose length is equal to or greater than three times its worth.

4. Rated capacity and safety factor. Hooks covered by this CID shall be designed with a rated capacity as specified in table I, with a minimum safety factor of 5.

5. Tested capacity. The hooks shall lift and hold a load equal to not less than 5 times the rated capacity of the hook. Tests and examinations shall be in accordance with ANSI B30.10-0.1(b).

6. Hook-latch assembly. The latch assembly shall be manufactured of noncorrosive metal or have an all weather anticorrosive finish. The latch assembly shall bridge the throat opening in the closed position and retain loose slings or other hoisting devices under slack conditions. Opening the latch may be accomplished manually or by other methods.

7. Identification marking. Each hook shall be permanently and legibly marked with the rated capacity in short tons (2,000/pound/ton).

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this CID are met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.


If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing and marking. Unless otherwise specified in the contract or order, the packaging and packing shall be in accordance with normal commercial practice and shall assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling and storage. The shipping container shall be compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

CID based part identification numbers. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for contractor.

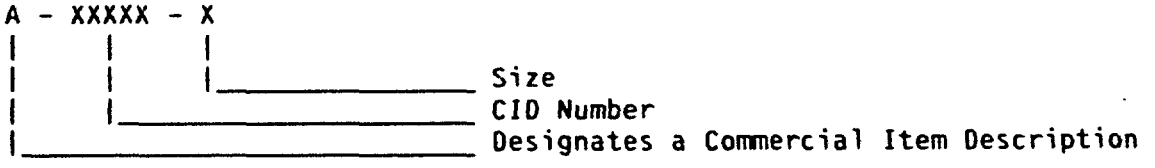

The size of throat opening with latch is identified by four alphanumeric codes.

Size (inches)	Size Designator Code
0.875	A
0.937	B
1.000	C
1.688	D

Notes. Purchasers should specify rated capacity.

ANSI standards are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

ASTM standards are available from ASTM, 1916 Race Street, Philadelphia, PA 19103.

National Motor Freight Classification standards are available from American Trucking Association, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.

Uniform Freight Classification standards are available from Uniform Classification Committee, Tariff Publishing Officer, Room 2206, 222 South Riverside Plaza, Chicago, IL 60606.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Navy - YD
Air Force - 99

Review Activities

Air Force - 82
DLA - IS

User Activities

Navy - OS, SH

PREPARING ACTIVITY:

Navy - YD

Project 4030-0204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-50469A	HOOK, REGULAR EYE, LATCH TYPE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 * EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Commanding Officer (Code 156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Code 156
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.