A-A-50471A
April 11, 1989
SUPERSEDING
A-A-50471
November 14, 1983

COMMERCIAL ITEM DESCRIPTION

# OILER, HAND, RECTANGULAR, PUSH SIDES

The General Services Administration has authorized the use of this Commercial Item Description (CID) is intended for use in preference to type IV of Federal Specification GGG-O-591.

Abstract. The rectangular, push sides, hand oiler shall be similar to figure 1 and shall consist essentially of a rectangular body, two washers, and a spout. The body and spout shall be of cold-rolled steel or High Density Polyethylene (HDPE) materiel not less than 0.020-inch thick. The design shall be such that the spout may be attached in the conventional manner for dispensing oil or inverted and screwed into the body for storage. The oiler shall be leakproof regardless of the position of the spout. The oilers shall comply with the requirements of table I.

TABLE I. Rectangular, push sides oiler.

| Size nominal | A width Minimum | B Height Minimum | C thickness Minimum | Capacity Minimum |
|---|---|---|---|---|
| Pint | Inches | Inches | Inches | Fluid oz |
| 3/4 | 1-1/2 | 6-1/2 | 1-1/4 | 12 |

Salient characteristics.

1. Body. Portions of two of the vertical sides of the body shall be convex in a manner to eject oil from the oiler when pushed and to return to normal position when pressure is released. The opening in the top of the body shall be not less than 3/4 inch in diameter and shall be provided with a bushing that is threaded to receive the threaded portion of the spout. Soldered seams are permissable in this type oiler.

Beneficial comments (recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: Commanding Officer, Naval Construction Battalion Center (Code 156), Port Hueneme, CA 93043-5000).

FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

2. Spout. The orifice at the outer end of the spout shall be not less than 0.060 ±0.005-inch diameter. The small end of the spout shall be provided with a cap attached by a leakproof connection and be readily detachable. The large end of the spout shall be provided with an externally threaded sleeve having a knurled retainer containing two washers, one on each side of the knurled portion. The knurled retainer shall be located midway between the two threaded ends of the sleeve so that either end of the sleeve may be screwed into the can opening. The spout shall be straight.

3. Finish. The oilers shall be polished, brass or copper coated, or plated with an opaque lacquer or varnish, lacquered with an opaque lacquer, nickel plated, or a baked on enamel finish.

4. Marking. Each oiler shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacturer may be readily determined.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this CID are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.


Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing and marking. Unless otherwise specified in the contract or order, the packaging and packing shall be in accordance with normal commercial practice and shall assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

CID base part identification number (PIN). The following PIN procedure is for Government purposes and does not constitute a requirement for the contractor. The PIN to be used for oilers acquired to this CID are created as follows:

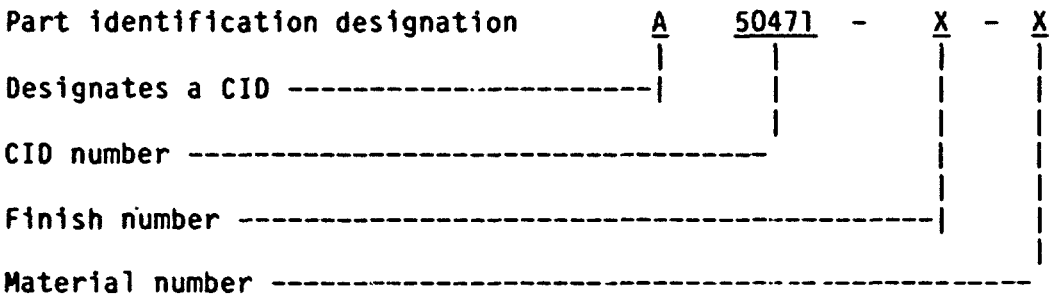


Material

1 = Cold rolled steel
2 = High Density
Polyethylene (HDPE)

Finish

1 = Polished w/clear lacquer or varnish
2 = Brass coated or plated w/clear lacquer or varnish
3 = Copper coated or plated w/clear lacquer or varnish
4 = Lacquer opaque
5 = Nickel plated
6 = Baked or enamel

Notes. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

1. Title, number and date of this CID.
2. PIN number required.

MILITARY INTERESTS:

Review Activities

Army - EA
DLA - CS

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS

PREPARING ACTIVITY:

Navy - YD

Project No. 4930-0311



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

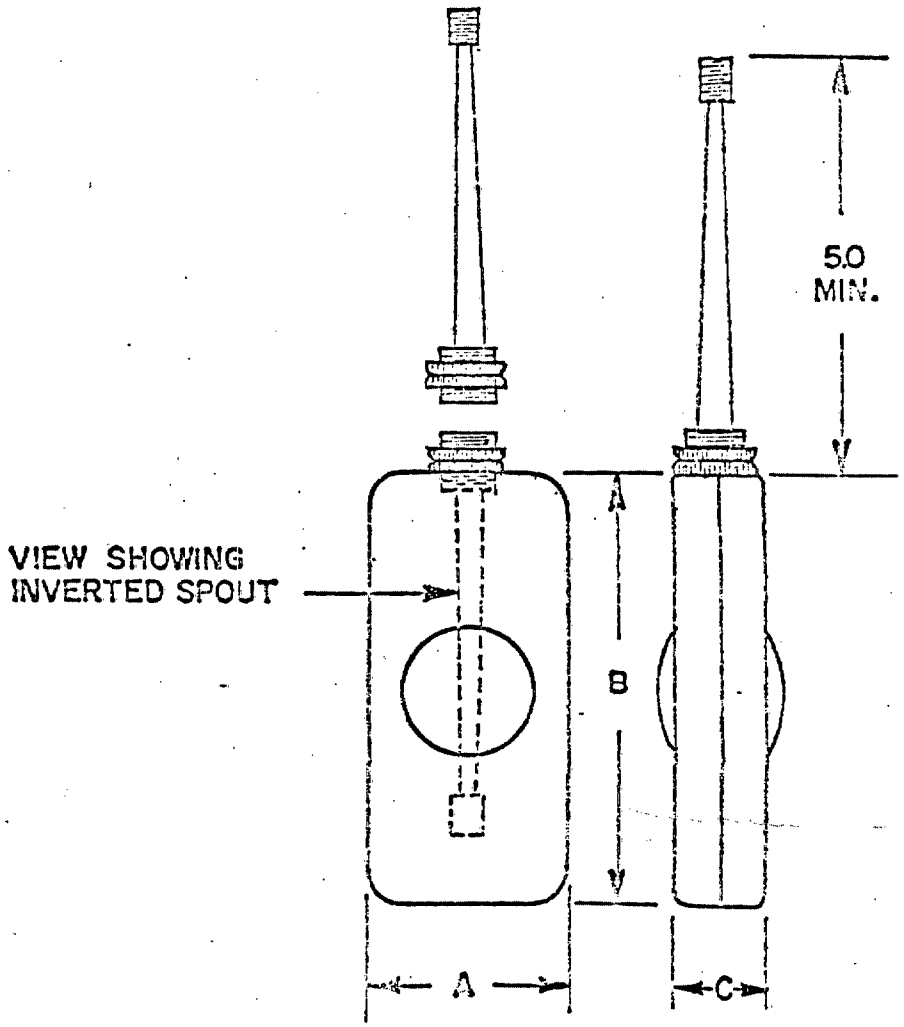



FIGURE 1. Rectangular, Push Sides, Hand Oiler

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.

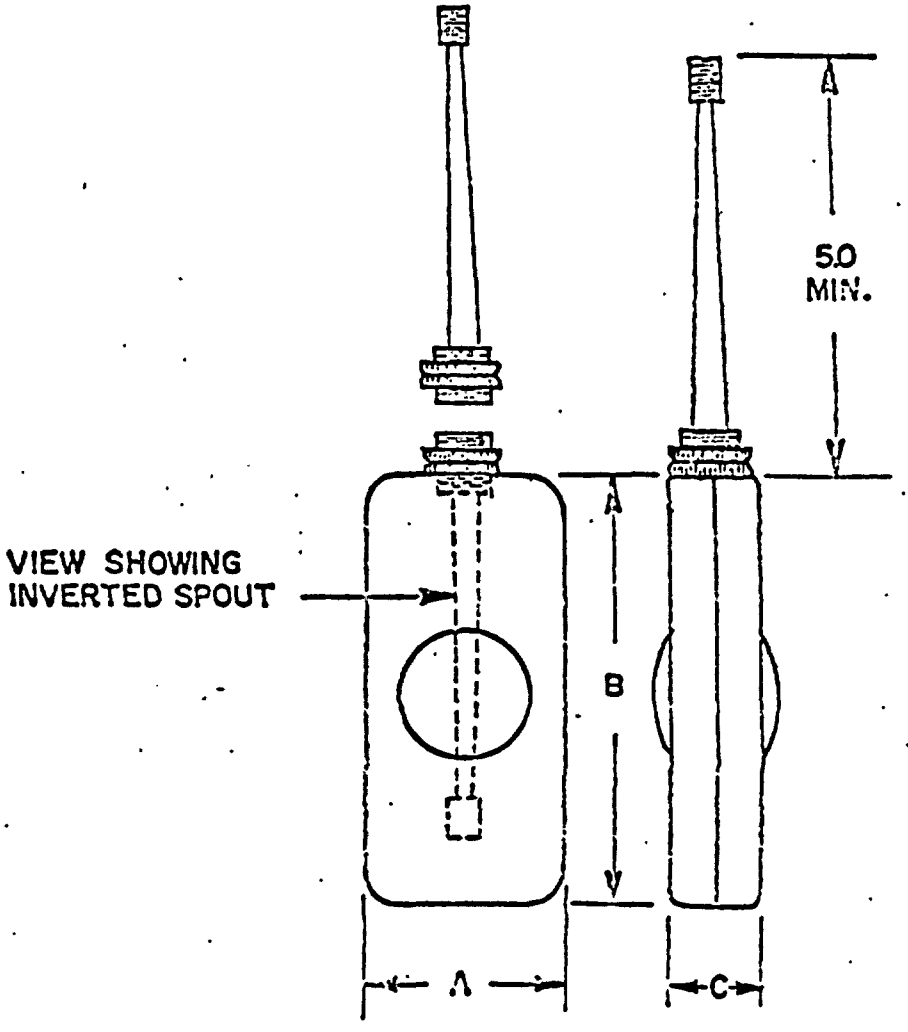



FIGURE 1: Rectangular, Push Sides, Hand Oiler

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:43Z
Check the source to verify that this is the current version before use.



REPRODUCED AT GOVERNMENT EXPENSE