INCH-POUND

MIL-STD-1903
26 AUGUST 1988

MILITARY STANDARD

NUTS
PREFERRED FOR DESIGN,
LISTING OF

FSC 5310

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, DC 20301

Nuts Preferred for Design, Listing of

MIL-STD-1903

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research, Development and Engineering Center, ATTN: SMCAR-ESC-S, Picatinny Arsenal, NJ 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of this bookform standard is to provide a commodity type parts document on nuts to aid military equipment designers and engineers in the selection of preferred nuts.

2. This document consists of an index of preferred standardization documents and a listing of preferred parts within these documents that have been selected with respect to configuration, sizes, materials, and finishes for nuts.

3. The selection of preferred documents listed in this standard and the selection of part numbers within the preferred documents were made as follows:

a. Selection of documents

(1) Documents listed or scheduled for listing in the Department of Defense Index of Specifications and Standards (DODISS).

(2) Documents which are active for design.

(3) Documents specifying part numbers (dash numbers) which designate specific sizes, materials, and finishes.

b. Selection of part numbers

(1) By conducting a thorough search and evaluation of existing DOD procurement information.

(2) By evaluation of preferred parts listed in recent weapon system contracts.

(3) By evaluation of preferred parts lists obtained from industry.

4. To increase the scope and versatility of this nut standard, periodic revisions will be developed. Results from standardization studies, MILITARY PARTS CONTROL ADVISORY GROUP (MPCAG) evaluations, evaluation of a new family of nuts and recommendations from interested activities will form a basis for these revisions.

5. The following issued military standards cover other preferred for design standard parts:

MIL-STD-1251 - Screws and Bolts Preferred for Design, Listing of
MIL-STD-1598 - Studs, Preferred for Design, Listing of
MIL-STD-1754 - Fastening Devices, Preferred for Design, Listing of
MIL-STD-1755 - Keys and Pins, Preferred for Design, Listing of
MIL-STD-1756 - Rings, Retaining, Preferred for Design, Listing of
MIL-STD-1758 - Inserts, Screw Thread, Preferred for Design, Listing of
MIL-STD-1759 - Rivets and Rivet Type Fasteners, Preferred for Design, Listing of
MIL-STD-1762 - Bearings and Bushings, Plain, Preferred for Design, Listing of
MIL-STD-1764 - Washers, Preferred for Design, Listing of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

CONTENTS

			PAGE
Paragraph	1.	SCOPE	1
	2.	REFERENCED DOCUMENTS	1
	3.	DEFINITIONS	13
	4.	GENERAL STATEMENTS	16
	5.	DETAILED REQUIREMENTS	16
	6.	NOTES	16

SECTIONS

Section			
	100	LOCKNUT, TUBE FITTING	
	101	Locknut, Tube Fitting, Boss Connection (FSC 4730)	101.1
	200	NUT, PLAIN, BLIND RIVET	
	201	Nut, Plain, Blind Rivet, Countersunk Head	201.1
	202	Nut, Plain, Blind Rivet, Flat Head	202.1
	300	NUT, PLAIN, CAP	
	301	Nut, Plain, Cap, Low and High Crown	301.1
	400	NUT, PLAIN, CASTELLATED HEXAGON	
	401	Nut, Plain, Castellated, Hexagon	401.1
	500	NUT, PLAIN, CLINCH	
	501	Nut, Plain, Clinch	501.1
	502	Nut, Plain, Clinch (Floating, 400° F)	502.1
	503	Nut, Plain, Clinch, Floating, Knurled Collar, Miniature, 450° F and 600° F	503.1
	504	Nut, Plain, Clinch, Floating, Knurled Collar, 450° F and 600° F	504.1
	505	Nut, Plain, Clinch (Flush)	505.1
	506	Nut, Plain, Clinch (Flush)	506.1
	507	Nut, Plain, Clinch (Hexagon Shank)	507.1
	508	Nut, Plain, Clinch (Knurled Collar, 450° and 600° F)	508.1
	509	Nut, Plain, Clinch (Round)	509.1
	600	NUT, PLAIN, CONE SEAT, HEXAGON	
	601	Nut, Plain, Cone Seat, Hexagon	601.1
	700	NUT, PLAIN, HEXAGON	
	701	Nut, Plain, Hexagon	701.1
	702	Nut, Plain, Hexagon, Airframe	702.1
	703	Nut, Plain, Hexagon, Boss Connection (FSC 4730)	703.1
	704	Nut, Plain, Hexagon, Check	704.1
	705	Nut, Plain, Hexagon, Connector Mounting	705.1
	706	Nut, Plain, Hexagon, Electrical Thin	706.1
	707	Nut, Plain, Hexagon, Jam	707.1
	708	Nut, Plain, Hexagon, Machine Screw	708.1
	709	Nut, Plain, Hexagon, Plastic (Nylon)	709.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTIONS - Continued

			PAGE
Section	710	Nut, Plain, Hexagon, Small Pattern	710.1
	711	Nut, Plain, Hexagon, Zinc Coat	711.1
	800	NUT, PLAIN, KNURLED	
	801	Nut, Plain, Knurled (Round)	801.1
	900	NUT, PLAIN, ROUND	
	901	Nut, Plain, Round, Spanner	901.1
	1000	NUT, PLAIN, SLOTTED, HEXAGON	
	1001	Nut, Plain, Slotted, Hexagon	1001.1
	1002	Nut, Plain, Slotted, Hexagon, Shear	1002.1
	1100	NUT, PLAIN, SPLINE	
	1101	Nut, Plain, Spline, Round	1101.1
	1200	NUT, PLAIN, SQUARE	
	1201	Nut, Plain, Square	1201.1
	1300	NUT, PLAIN, WELDING	
	1301	Nut, Plain, Welding (with Pilot)	1301.1
	1302	Nut, Plain, Welding (without Pilot)	1302.1
	1400	NUT, PLAIN, WING	
	1401	Nut, Plain, Wing	1401.1
	1500	NUT, SELF-LOCKING, ASSEMBLED WASHER	
	1501	Nut, Self-Locking, Assembled Washer, Castellated Hexagon, Counterbored, 250° F	1501.1
	1502	Nut, Self-Locking, Assembled Washer, Slotted Hexagon, Counterbored, 450° F	1502.1
	1600	NUT, SELF-LOCKING, BARREL	
	1601	Nut, Self-Locking, Barrel (Floating)	1601.1
	1700	NUT, SELF-LOCKING, BLIND RIVET	
	1701	Nut, Self-Locking, Blind Rivet (Closed End), Elliptical Head	1701.1
	1702	Nut, Self-Locking, Blind Rivet (Open End), Elliptical Head	1702.1
	1703	Nut, Self-Locking, Blind Rivet, Open End, Countersunk Head	1703.1
	1704	Nut, Self-Locking, Blind Rivet, Open End, Flat Head	1704.1
	1705	Nut, Self-Locking, Blind Rivet, Serrated Head..	1705.1
	1800	NUT, SELF-LOCKING, CAP	
	1801	Nut, Self-Locking, Cap	1801.1
	1900	NUT, SELF-LOCKING, CLINCH	
	1901	Nut, Self-Locking, Clinch (Floating, 400° F).	1901.1
	1902	Nut, Self-Locking, Clinch (Floating, 450° F, 125 KSI Ftu).....	1902.1
	1903	Nut, Self-Locking, Clinch, Floating, Knurled Collar, 450° F and 600° F	1903.1
	1904	Nut, Self-Locking, Clinch, Floating, Knurled Collar, Miniature, 450° F and 600° F	1904.1
	1905	Nut, Self-Locking, Clinch (Hexagon Shank)	1905.1
	1906	Nut, Self-Locking, Clinch (Knurled Collar, 450° F and 600° F)	1906.1
	1907	Nut, Self-Locking, Clinch (Knurled Collar, Miniature, 450° F	1907.1
	1908	Nut, Self-Locking, Clinch (Knurled Shank, 250° F)	1908.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTIONS - Continued

Section			PAGE
	1909	Nut, Self-Locking, Clinch (Knurled Shank, Miniature, 250° F)	1909.1
	1910	Nut, Self-Locking, Clinch (Knurled Shank, Miniature, 450° F)	1910.1
	1911	Nut, Self-Locking, Clinch (Knurled Shank, Swage - Clinching, 250° F, UNJF-3B)	1911.1
	1912	Nut, Self-Locking, Clinch, Round	1912.1
	2000	NUT, SELF-LOCKING, DOUBLE HEXAGON	
	2001	Nut, Self-Locking, Double Hexagon	2001.1
	2100	NUT, SELF-LOCKING, EXTENDED WASHER, HEXAGON	
	2101	Nut, Self-Locking, Extended Washer, Hexagon, 450° F and 800° F	2101.1
	2200	NUT, SELF-LOCKING, GANG CHANNEL	
	2201	Nut, Self-Locking, Gang Channel, Floating, 250° F, 450° F, and 800° F	2201.1
	2300	NUT, SELF-LOCKING, HEXAGON	
	2301	Nut, Self-Locking, Hexagon	2301.1
	2400	NUT, SELF-LOCKING, PLATE	
	2401	Nut, Self-Locking, Plate, Corner, 125 KSI Ftu	2401.1
	2402	Nut, Self-Locking, Plate, Corner, 125 KSI Ftu (Non-Metallic Insert)	2402.1
	2403	Nut, Self-Locking, Plate, Corner, 160 KSI Ftu	2403.1
	2404	Nut, Self-Locking, Plate, Corner, Floating, 125 KSI Ftu	2404.1
	2405	Nut, Self-Locking, Plate, Corner, Floating, Replaceable Nut Element, 125 KSI Ftu	2405.1
	2406	Nut, Self-Locking, Plate, One-Lug, Floating, Replaceable Nut Element, 125 KSI Ftu	2406.1
	2407	Nut, Self-Locking, Plate, One Lug, 125 KSI Ftu	2407.1
	2408	Nut, Self-Locking, Plate, One Lug, 160 KSI Ftu	2408.1
	2409	Nut, Self-Locking, Plate, One Lug, Floating, 125 KSI Ftu, 160 KSI Ftu	2409.1
	2410	Nut, Self-Locking, Plate, One Lug, 125 KSI Ftu (Non-metallic Insert), 250° F	2410.1
	2411	Nut, Self-Locking, Plate, Right Angle	2411.1
	2412	Nut, Self-Locking, Plate, Right Angle, Floating	2412.1
	2413	Nut, Self-Locking, Plate, Side by Side, 125 KSI Ftu	2413.1
	2414	Nut, Self-Locking, Plate, Side by Side, 160 KSI Ftu	2414.1
	2415	Nut, Self-Locking, Plate, Side by Side, Floating, Low Height, 160 KSI Ftu	2415.1
	2416	Nut, Self-Locking, Plate, Two Lug, 125 KSI Ftu	2416.1
	2417	Nut, Self-Locking, Plate, Two Lug, 160 KSI Ftu	2417.1
	2418	Nut, Self-Locking, Plate, Two Lug, Cap, Floating	2418.1
	2419	Nut, Self-Locking, Plate, Two Lug, Floating, 125 KSI Ftu	2419.1
	2420	Nut, Self-Locking, Plate, Two Lug, Floating, Replaceable Nut Element, 125 KSI Ftu	2420.1
	2421	Nut, Self-Locking, Plate, Two Lug, Low-Height, Floating, 160 KSI Ftu	2421.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTIONS (Continued)

			PAGE
Section	2422	Nut, Self-Locking, Plate, Two Lug, Low-Height, Floating, Reduced Rivet Spacing, 160 KSI Ftu ..	2422.1
	2500	NUT, SELF-LOCKING, ROUND	
	2501	Nut, Self-Locking, Round, Flanged	2501.1
	2600	NUT, SELF-LOCKING, SLOTTED HEXAGON	
	2601	Nut, Self-Locking, Slotted Hexagon	2601.1
	2602	Nut, Self-Locking, Slotted Hexagon (Lightweight), 450° F	2602.1
	2700	NUT, SELF-LOCKING, SPLINE	
	2701	Nut, Self-Locking, Spline	2701.1
	2800	NUT, SHEET SPRING	
	2801	Nut, Sheet Spring (Clip-In Type)	2801.1
	2802	Nut, Sheet Spring (Flat Type)	2802.1
	2803	Nut, Sheet Spring, "J" Type	2803.1
	2804	Nut, Sheet Spring, "U" Type	2804.1
	2805	Nut, Sheet Spring, "U" Type, Self-Locking	2805.1
	2900	NUT, STAMPED	
	2901	Nut, Stamped	2901.1
	3000	PUSH ON NUT	
	3001	Push on Nut	3001.1

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the currentversion before use.

1. SCOPE

1.1 Scope. This standard provides a listing of preferred nuts encompassing the following characteristics:

a. Configuration
b. Size
c. Materials
d. Protective Coatings and Finishes

1.2 Purpose. The purpose of this standard is as follows:

a. Provide the designer with a listing of preferred nuts to promote their use in design of weapon systems and equipments.

b. Control and minimize the variety of nuts used in military equipment thereby facilitating logistic support of the equipment during its life cycle.

1.3 Application. To minimize the proliferation of nuts, only the preferred part number listed herein is authorized for use in new design. All other part numbers, even though shown on current Military Specification Sheets, Military Standards (MS), National Aerospace Standards (NAS), Aeronautical Standards (AS), and Air Force/Navy Aeronautical Standards (AN), are not approved for use in new design unless approved by the cognizant Government procuring activity.

1.4 Intended Use. Implement this standard by including one of the following options in this contract:

a. Require this standard as a supplement to an end use type standard such as MIL-STD-1515. When thus required, only the nuts listed in both the end use type and this standard are acceptable. Use of other nuts requires approval of the Government procuring activity.

b. Require this standard as a guide to be used with an end use type standard such as MIL-STD-1515. When thus required, the nuts listed in the end use type standard and this standard are acceptable. The designer must assure himself the nuts listed in both the end type standard and this standard are not adequate for his requirement before using nuts not listed herein. Use of nuts not listed in the end type standard requires approval of the Government procuring activity.

c. Require this standard and indicate exceptions to it. When thus required, only the nuts listed in this standard and not excluded by the exceptions are acceptable. Use of other nuts requires approval of the Government procuring activity.

d. Require this standard as a guide. When thus required, the designer must assure himself the nuts listed in this standard are not adequate for the requirement before using other nuts.

2. REFERENCED DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this standard to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

		SECTION
MIL-N-45938/1 -	Nut, Plain, Clinch (Self-Clinching, Round)	509
MIL-N-45938/2 -	Nut, Plain, Clinch and Nut, Self-Locking, Clinch (Swage-Clinching, Hexagon Shank)	507/1905
MIL-N-45938/3 -	Nut, Plain, Clinch and Nut, Self-Locking, Clinch (Self-Clinching, Knurled Collar, 450°F and 600°F	508/1906
MIL-N-45938/4 -	Nut, Plain, Clinch (Self-Clinching, Flush)	505
MIL-N-45938/5 -	Nut, Self-Locking, Clinch (Swage-Clinching, Knurled Shank, Miniature, 250°F)	1909
MIL-N-45938/6 -	Nut, Self-Locking, Clinch (Swage-Clinching, Knurled Shank, Miniature, 450°F)	1910
MIL-N-45938/7 -	Nut, Self-Locking, Clinch (Self-Clinching, Knurled Collar, Miniature, 450°F)	1907
MIL-N-45938/8 -	Nut, Self-Locking, Clinch (Swage-Clinching, Knurled Shank, 250°F)	1908
MIL-N-45938/9 -	Nut, Self-Locking, Clinch (Knurled Shank, Swage-Clinching, 250°F, UNJF-3B)	1911
MIL-N-45938/10 -	Nut, Plain and Self-Locking, Clinch, (Self-Clinching) Round	509/1912
MIL-N-45938/11 -	Nut, Plain and Self-Locking, Clinch (Floating, 400°F)	502/1901
MIL-N-45938/12 -	Nut, Plain, Spline, Round	1101
MIL-N-45938/13 -	Nut, Plain and Self-Locking, Clinch (Floating, Knurled Collar, Miniature 450°F and 600°F).....	503/1904
MIL-N-45938/14 -	Nut, Plain and Self-Locking, Clinch (Floating, Knurled Collar, 450°F and 600°F).....	504/1903

STANDARDS

MILITARY

MS3186	-	Nut, Plain, Hexagon, Connector Mounting	705
MS3214	-	Nut, Plain, Clinch, Flush	506

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

			SECTION
MS9099	-	Nut-Hex, Boss Connection, Aluminum	101
MS9100	-	Nut-Hex, Boss Connection, Cres.	101
MS9200	-	Nut-Plain, Hex, Boss Connection, Aluminum	703
MS9201	-	Nut-Plain, Hex, Boss Connection, Cres.	703
MS9356	-	Nut, Plain, Hexagon - A-286, MIL-S-8879	701
MS9357	-	Nut, Plain, Hexagon - A-286, Silver Plated, MIL-S-8879 .	701
MS9358	-	Nut, Castellated, Hexagon - A-286, MIL-S-8879	401
MS9359	-	Nut, Castellated, Hexagon - A-286, Silver Plated, MIL-S-8879	401
MS9360	-	Nut, Plain, Hex-Drilled - A-286, Silver Plated, MIL-S-8879	701
MS9361	-	Nut, Plain, Hexagon, Check - A-286, MIL-S-8879	704
MS9362	-	Nut, Plain, Hexagon, Check - A-286, Silver Plated, MIL-S-8879	704
MS9363	-	Nut, Slotted, Hexagon-Shear, A-286, MIL-S-8879	1001
MS9364	-	Nut, Slotted, Hexagon-Shear, A-286, Silver Plated, MIL-S-8879	1001
MS9553	-	Nut-Hex, Boss Connection, Cres.	101
MS9881	-	Nut, Plain, Hexagon-AMS6322, Cadmium Plated, MIL-S-8879 ..	701
MS9882	-	Nut, Plain, Hex-Drilled, AMS6322, Cadmium Plated, MIL-S-8879	701
MS9951	-	Nut, Spanner-End Slots, Cupwasher Locked, Steel, AMS6322, MIL-S-8879	901
MS9984	-	Nut, Spanner, End Slots, Cupwasher Locked, A-286, Silver Plated, MIL-S-8879	901

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

		SECTION
MS14144	Nut, Self-Locking, Lightweight, Castellated, 450°F	2602
MS14145	Nut, Self-Locking, Lightweight, Thin, Castellated, 450°F	2602
MS14146	Nut, Self-Locking, Castellated, Hexagon, C'Bored, Captive Washer, 450°F	1502
MS14156	Nut, Wheel, Self-Locking, Flanged, Steel, 180 KSI Ftu, 450°F Spline Drive	2501
MS14164	Nut, Wheel, Self-Locking, Flanged, Steel, 180 KSI Ftu, 450°F Spline Drive	2501
MS14182	Nut, Self-Locking, Inconel, 220 KSI, Ftu, 800°F, Flanged, MS33787 Wrenching Element	2501
MS14200	Nut, Self-Locking, Clinch, Floating, 450°F, 125 KSI Ftu	1902
MS14210	Nut, Self-Locking, Clinch, Floating, 450°F, 125 KSI Ftu	1902
MS16203	Nut, Plain, Hexagon, and Hexagon Jam, UNC-2B, Nonmagnetic	701
MS16211	Nut, Plain, Square, Regular, Unfinished, Copper-Silicon Alloy, UNC-2B, Nonmagnetic	1201
MS16228	Nut, Self-Locking, Hexagon-Thin, UNC-3B (Non-Metallic Insert) Austenitic Corrosion Resistant Steel, Nonmagnetic, 250°F	2301
MS16994	Nut, Plain, Knurled	801
MS17825	Nut, Self-Locking, Castellated, Hexagon - 250°F, Non-Metallic Insert	2601
MS17826	Nut, Self-Locking, Castellated, Hexagon - 250°F, Thin Non-Metallic Insert	2601
MS17828	Nut, Self-Locking, Hexagon, Regular-Height, (Non-Metallic Insert) 250°F, Nickel-Copper Alloy	2301
MS17829	Nut, Self-Locking, Hexagon, Regular Height, 250°F, (Nonmetallic Insert) Non-Corrosion-Resistant Steel	2301

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

		SECTION
MS17830	- Nut, Self-Locking, Hexagon-Regular Height, 250°F, (Non-Metallic Insert) 300 Series Corrosion Resistant Steel	2301
MS20500	- Nut, Self-Locking, Hexagon, 1200°F, 125 KSI Ftu	2301
MS20501	- Nut, Self-Locking, Plate, Two Lug, 1200°F, 125 KSI Ftu	2417
MS21042	- Nut, Self-Locking, 450°F, Reduced Hexagon, Reduced Height, Ring Base, Non-Corrosion Resistant Steel	2101
MS21043	- Nut, Self-Locking, 450°F, Reduced Hexagon, Reduced Height, Ring Base, Corrosion Resistant Steel	2101
MS21044	- Nut, Self-Locking, Hexagon-Regular Height, 250°F, 125 KSI Ftu and 60 KSI Ftu	2301
MS21045	- Nut, Self-Locking, Hexagon-Regular Height, 450°F, 125 KSI Ftu	2301
MS21046	- Nut, Self-Locking, Hexagon-Regular Height, 800°F, 125 KSI Ftu	2301
MS21047	- Nut, Self-Locking, Plate, Two Lug, Low Height, Steel, 125 KSI Ftu, 450°F	2416
MS21048	- Nut, Self-Locking, Plate, Two Lug, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2416
MS21049	- Nut, Self-Locking, Plate, Two Lug, 100° CSK Low Height, Steel, 125 KSI Ftu, 450°F	2416
MS21050	- Nut, Self-Locking, Plate, Two Lug, 100° CSK Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2416
MS21051	- Nut, Self-Locking, Plate, One Lug, Low Height, Alloy Steel, 125 KSI Ftu, 450°F	2407
MS21052	- Nut, Self-Locking, Plate, One Lug, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2407
MS21053	- Nut, Self-Locking, Plate, One Lug, 100° CSK Low Height, Alloy Steel, 125 KSI Ftu, 450°F	2407
MS21054	- Nut, Self-Locking, Plate, One Lug, 100° CSK Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2407

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

		SECTION
MS21055	Nut, Self-Locking, Plate, Corner, Low Height, Alloy Steel, 125 KSI Ftu, 450°F	2401
MS21056	Nut, Self-Locking, Plate, Corner, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2401
MS21057	Nut, Self-Locking, Plate, Corner, 100° CSK, Low Height, Alloy Steel, 125 KSI Ftu, 450°F	2401
MS21058	Nut, Self-Locking, Plate, Corner, 100° CSK, Low Height, Cres, 125 KSI Ftu, 450°F and 800° F	2401
MS21059	Nut, Self-Locking, Plate, Two Lug, Floating, Low Height, Alloy Steel, 125 KSI Ftu, 450°F	2419
MS21060	Nut, Self-Locking, Plate, Two Lug, Floating, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2419
MS21061	Nut, Self-Locking, Plate, One Lug, Floating, Low Height, Alloy Steel, 125 KSI Ftu, 450°F	2409
MS21062	Nut, Self-Locking, Plate, One Lug, Floating, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2409
MS21063	Nut, Self-Locking, Channel, Floating, Low Height, Steel, 125 KSI Ftu, 250°F	2201
MS21064	Nut, Self-Locking, Channel, Floating, Low Height, Steel, 125 KSI Ftu, 450°F	2201
MS21065	Nut, Self-Locking, Channel, Floating, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2201
MS21066	Nut, Self-Locking, Channel, 100° CSK, Floating, Low Height, Steel, 125 KSI Ftu, 250°F	2201
MS21067	Nut, Self-Locking, Channel, 100° CSK, Floating, Low Height, Steel, 125 KSI Ftu, 450°F	2201
MS21068	Nut, Self-Locking, Channel, 100° CSK, Floating, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2201
MS21069	Nut, Self-Locking, Plate, Two Lug, Reduced Rivet Spacing, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2416
MS21070	Nut, Self-Locking, Plate, Two Lug, Reduced Rivet Spacing, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

		SECTION
MS21071	- Nut, Self-Locking, Plate, One Lug, Reduced Rivet Spacing, Low Height, Steel, 125 KSI Ftu, 450°F	2407
MS21072	- Nut, Self-Locking, Plate, One Lug, Reduced Rivet Spacing, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2407
MS21073	- Nut, Self-Locking, Plate, Corner, Reduced Rivet Spacing, Low Height, Steel, 125 KSI Ftu, 450°F	2401
MS21074	- Nut, Self-Locking, Plate, Corner, Reduced Rivet Spacing, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2401
MS21075	- Nut, Self-Locking, Plate, Two Lug, Floating, Reduced Rivet Spacing, Low Height, Steel, 125 KSI Ftu, 450°F ..	2419
MS21076	- Nut, Self-Locking, Plate, Two Lug, Floating, Reduced Rivet Spacing, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2419
MS21077	- Nut, Self-Locking, Plate, Two Lug, Floating, Non-Metallic Insert, Steel, 125 KSI Ftu, 250°F	2419
MS21078	- Nut, Self-Locking, Plate, Two Lug, Non-Metallic Insert, 125 KSI Ftu, 250°F	2416
MS21079	- Nut, Self-Locking, Gang Channel, Non-Metallic Insert, 125 KSI Ftu, 250°F	2201
MS21080	- Nut, Self-Locking, Plate, One Lug, Non-Metallic Insert, Steel, 125 KSI Ftu, 250°F	2410
MS21081	- Nut, Self-Locking, Plate, Corner, Non-Metallic Insert, Steel, 125 KSI Ftu, 250°F	2402
MS21082	- Nut, Self-Locking, Plate, One Lug, Floating, Non-Metallic Insert, Steel, 125 KSI Ftu, 250°F	2409
MS21083	- Nut, Self-Locking, Hexagon, Non-Metallic Insert, Low Height, 250°F	2301
MS21084	- Nut, Self-Locking, Steel, 220 KSI Ftu, 450°F, Flanged, MS33787 Wrenching Element	2501
MS21085	- Nut, Self-Locking, Steel, 260 KSI Ftu, 450°F, Flanged, MS33787 Wrenching Element	2501

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

			SECTION
MS21086	-	Nut, Self-Locking, Plate, Side by Side Reduced Rivet Spacing, Low Height, Steel, 125 KSI Ftu, 450°F	2413
MS21087	-	Nut, Self-Locking, Plate, Side by Side Reduced Rivet Spacing, Low Height, Cres, 125 KSI Ftu, 450°F and 800°F	2413
MS21133	-	Nut, Self-Locking, Steel, 180 KSI Ftu, 450°F, Flanged, MS33787 Wrenching Element	2501
MS21224	-	Nut, Self-Locking, Castellated, Hexagon, Counterbored, Assembled Washer, 250°F, Non-Metallic Insert (For Self Retaining Bolts)	1501
MS21225	-	Nut, Self-Locking, Castellated, Hexagon-800°F	2601
MS21244	-	Nut, Castellated, Hexagon, Counterbored Assembled Washer, 450°F (For Self Retaining Bolts)	1501
MS21245	-	Nut, Self-Locking, Hexagon-Thin, 450°F, 80 KSI Ftu	2301
MS21304	-	Nut, Plain, Square	1201
MS21331	-	Nut, Plain, Cinch	501
MS24679	-	Nut, Plain, Cap, Low Crown, UNC-2B and UNF-2B	301
MS24680	-	Nut, Plain, Cap, High Crown, UNC-2B and UNF-2B	301
MS25082	-	Nut, Plain, Hexagon, Electrical, Thin	706
MS27040	-	Nut, Plain, Square-Steel, Cadmium Plated	1201
MS27127	-	Nut, Welding-Without Pilot	1302
MS27128	-	Nut, Welding-Pilot	1301
MS27130	-	Nut, Plain, Blind Rivet-Flat and Countersunk Head, Open End	201
MS27151	-	Nut, Stamped-Standard Type	2901
MS27952	-	Nut, Plain-Hexagon, Jam, Left Hand	707
MS27955	-	Nut, Plain-Round, Spanner	901
MS33737	-	Nuts, Self-Locking, Clip-In Type, Instrument Mounting .	2801
MS35425	-	Nut, Plain, Wing, UNC-2B	1401
MS35426	-	Nut, Plain, Wing, UNF-2B	1401

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

			SECTION
MS35649	-	Nut, Plain-Hexagon, Machine Screw, UNC-2B	708
MS35650	-	Nut, Plain-Hexagon, Machine Screw, UNF-2B	708
MS35691	-	Nut, Plain, Hexagon (Jam) UNC-2B and UNF-2B	707
MS35692	-	Nut, Slotted-Hexagon, UNC-2B and UNF-2B	1001
MS51468	-	Nut, Plain, Wing	1401
MS51469	-	Nut, Plain, Hexagon (Machine Screw) Carbon Steel, UNC-2B, Zinc Coat	711
MS51470	-	Nut, Plain, Hexagon (Machine Screw) Carbon Steel, UNC-2B, Zinc Coat	711
MS51471	-	Nut, Plain, Hexagon (Jam), Carbon Steel, UNC-2B, Zinc Coat	711
MS51472	-	Nut, Plain, Hexagon, Carbon Steel, UNC-2B, Zinc Coat ..	711
MS51473	-	Nut, Plain, Hexagon, Carbon Steel, UNF-2B, Zinc Coat ..	711
MS51857	-	Nut, Push-On Steel	3001
MS51858	-	Nut, Plain-Hexagon, Plastic (Nylon)	709
MS51865	-	Nut, Self-Locking, Cap-General Purpose, 250°F	1801
MS51866	-	Nut, Self-Locking, Spline-General Purpose, 250°F	2701
MS51922	-	Nut, Self-Locking, Hexagon-Prevailing Torque, General Purpose, 250°F, UNC-2B and UNF-2B	2301
MS51943	-	Nut, Self-Locking, Hexagon-Prevailing Torque, For Critical Installations, 250°F, UNC-3B and UNF-3B	2301
MS51967	-	Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B (in./mm)	701
MS51968	-	Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNF-2B (in./mm.)	701
MS51969	-	Nut, Plain, Hexagon-Brass, Black Chemical Finish, UNC-2B	701
MS51970	-	Nut, Plain, Hexagon-Brass, Black Chemical Finish, UNF-2B	701

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Continued)

		SECTION
MS51971	- Nut, Plain, Hexagon-Steel, Corrosion Resisting, 300 Series, Passivated, UNC-2B	701
MS51972	- Nut, Plain, Hexagon-Steel, Corrosion Resisting, 300 Series, Passivated, UNF-2B	701
MS51984	- Nut, Plain, Cone Seat, Hexagon Wheel Mounting, 1/2 Inch	601
MS51988	- Nut, Self-Locking, Flanged-Prevailing Torque, Steel, Cadmium, UNC and UNF, (in./mm.)	2101
MS90723	- Nut, Sheet Spring - "J" Type	2803
MS90724	- Nut, Sheet Spring - "U" Type	2804
MS172321 thru MS172370	- Nut-Spanner, Aeronautical	901

AIR FORCE - NAVY AERONAUTICAL

AN256	- Nut, Self-Locking, Plate, Right Angle	2411
AN310	- Nut, Plain, Castellated, Airframe	401
AN315	- Nut, Plain, Hexagon, Airframe	702
AN316	- Nut, Jam, Hexagon	707
AN320	- Nut, Plain, Castellated, Shear	1002
AN150401 thru AN150425	- Nut, Plain, Hexagon, Check	704

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. (AIA)

NATIONAL AEROSPACE STANDARDS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

NATIONAL AEROSPACE

			SECTION
NAS446	-	Nut, Sheet Spring (Flat Type)	2802
NAS509	-	Nut, Drilled Jam	707
NAS577	-	Nut, Self-Locking, Barrel-Floating	1601
NAS671	-	Nut, Plain, Hexagon, Small Pattern	710
NAS1033	-	Nut, Self-Locking, Plate, Right-Angle, Floating	2412
NAS1291	-	Nut, Self-Locking, Extended Washer, Hexagon, Low Height	2101
NAS1329	-	Nut, Blind Rivet-Flathead, Internal Thread, Non-Locking (Free Running) or Self-Locking (Prevailing Torque) ...	202/1704
NAS1330	-	Nut, Blind Rivet-Countersunk Head, Internal Thread, Non-Locking (Free Running) or Self-Locking (Prevailing Torque)	201/1703
NAS1423	-	Nut, Plain, Hexagon, Drilled Jam, Thin	707
NAS1473	-	Nut, Self-Locking, Plate, Two Lug, Cap, Floating	2418
NAS1474	-	Nut, Self-Locking, Plate, Two Lug, Cap, Floating, Reduced Rivet Spacing	2418
NAS1731	-	Nut, Blind, Serrated Head, Self-Locking, 450°F	1705
NAS1734	-	Nut, Blind, Elliptical Head, Self-Locking, 450°F	1702
NAS1735	-	Nut, Blind, Elliptical Head, Self-Locking, Closed End, 450°F	1701
NAS1766	-	Nut, Self-Locking, Plate, Corner, Floating, 125 KSI Ftu	2404
NAS1770	-	Nut, Self-Locking, Plate, Two Lug, 160 KSI Ftu	2417
NAS1771	-	Nut, Self-Locking, Plate, One Lug, 160 KSI Ftu	2408
NAS1772	-	Nut, Self-Locking, Plate, One Lug, 160 KSI Ftu	2403
NAS1773	-	Nut, Self-Locking, Plate, Two Lug, Low Height, Floating 160 KSI Ftu	2421
NAS1774	-	Nut, Self-Locking, Plate, One Lug, Floating, 125 KSI Ftu, 160 KSI Ftu	2409

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDS

NATIONAL AEROSPACE (Continued)

			SECTION
NAS1775	-	Nut, Self-Locking, Plate, Two Lug, 160 KSI Ftu	2417
NAS1776	-	Nut, Self-Locking, Plate, One Lug, 160 KSI Ftu	2408
NAS1777	-	Nut, Self-Locking, Plate, Corner, 160 KSI Ftu	2403
NAS1778	-	Nut, Self-Locking, Plate, Side by Side, 160 KSI Ftu ...	2414
NAS1779	-	Nut, Self-Locking, Plate, Two Lug, Low Height, Floating Reduced Rivet Spacing, 160 KSI Ftu	2422
NAS1780	-	Nut, Self-Locking, Plate, Two Lug, 160 KSI Ftu	2417
NAS1781	-	Nut, Self-Locking, Plate, One Lug, 160 KSI Ftu	2408
NAS1782	-	Nut, Self-Locking, Plate, Corner, 160 KSI Ftu	2403
NAS1789	-	Nut, Self-Locking, Plate, Side by Side, Floating, Low Height, 160 KSI Ftu	2415
NAS1791	-	Nut, Self-Locking, Plate, Two Lug, Floating, Replaceable Nut Element, 125 KSI Ftu	2420
NAS1792	-	Nut, Self-Locking, Plate, One Lug, Floating, Replaceable Nut Element, 125 KSI Ftu	2406
NAS1793	-	Nut, Self-Locking, Plate, Corner, Floating, Replaceable Nut Element, 125 KSI Ftu	2405

(Application for copies should be addressed to the Aerospace Industries Association of America, Inc., 1725 De Sales Street N.W., Washington, D.C. 20036).

Society of Automotive Engineers (SAE) Aerospace Standards

AEROSPACE STANDARDS

AS3163	-	Nut, Plain, Round, Spanner, O.D. Slots	901
AS3261	-	Nut, Sheet, Spring "U" Type, Self-Locking	2805

(Application for copies should be addressed to the Society of Automotive Engineers, Inc. 400 Commonwealth Drive, Warrendale, PA 15096).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Adopted Industry Standards. Any Industry Specifications or Standard which is listed in the Department of Defense Index of Specifications and Standards (DODISS).

3.2 Commodity Type Document. A document which lists preferred parts within a Federal Supply Classification class or Item Name. This document is to be used for selecting preferred parts for a new design when the document is invoked as a contractual requirement in conjunction with a parts control requirement.

3.3 End Use Type Document. A document that lists preferred documents and establishes parts requirements which are contractually binding for the design and construction/manufacture of a weapon system or an established equipment category such as MIL-STD-1515.

3.4 Military Parts Control Advisory Group (MPCAG). A Department of Defense organization which provides advice to the Military Departments and military contractors on the selection of parts assigned commodity classes, and collects data on nonstandard parts for developing or updating military specifications and standards.

3.5 Approved Item Names. Approved item names used in this standard are defined in the following paragraphs corresponding to the section numbers:

a. NUT. A fastening device of various shapes having internal thread or an aperture of lugs or prongs designed to mate with an external thread for the purpose of securely holding threaded members brought into engagement therewith.

(100) LOCKNUT, TUBE FITTING. An item with internal machine threads designed to fit the external machine threads of a tube fitting. It has flat faces, one of which has a counterbored recess to accomoodate packing, packing or sealing ring(s), gasket(s), and the like. The item, when installed, provides a method of locking and sealing the connection.

(200) NUT, PLAIN, BLIND RIVET. A metallic headed fastener having internal threads for a portion of the full length. It may have a smooth, hexagon or splined shank with an open or closed end. Is designed to be expanded tightly against the material it is being installed in by means of a special tool. The item must have a specified grip range. The grip range is the thickness of the material into which the item is being installed.

(300) NUT, PLAIN, CAP. An item internally threaded from one end, and completely enclosed on the opposite end. The outer periphery parallel to the threaded axis may be square, cylindrical, hexagonal, octagonal, or dodecagonal and taper to a cone or dome shape on the closed end.

(400) NUT, PLAIN, CASTELLATED, HEXAGON. A nut having 6 flat sides, flat on the bottom and having a slotted cylindrical or dome shaped upper portion.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the currentversion before use.

DEFINITIONS (Continued)

(500) NUT, PLAIN, CLINCH. A nut having a sleeve portion on its under side, which can be crimped or clinched to hold the item in place when inserted in a hole.

(600) NUT, PLAIN, CONE SEAT, HEXAGON. A nut having 6 flat sides and a cone seat bearing surface. Items may have a removable collar.

(700) NUT, PLAIN, HEXAGON. A nut, flat on top and bottom having 6 flat sides.

(800) NUT, PLAIN, KNURLED. A nut, round in shape, having all or part of its outer surface knurled. It may have provisions for external wrenching.

(900) NUT, PLAIN, ROUND. A nut, circular in shape, that may have wrench flats on its periphery or may have holding or tightening features, such as slots, holes or protrusions in the periphery or in the face opposite the bearing surface.

(1000) NUT, PLAIN, SLOTTED, HEXAGON. A nut having a flat bearing surface and 6 flat sides with slots in its upper portion.

(1100) NUT, PLAIN, SPLINE. A nut having an externally splined sleeve which holds it in position when forced into a hole of slightly smaller diameter.

(1200) NUT, PLAIN, SQUARE. A nut, flat on top and bottom, having 4 flat sides.

(1300) NUT, PLAIN, WELDING. A nut with projection(s) that is designed to localized heating, during welding, at predetermined points and to fuse with the metal to which the nut is mounted.

(1400) NUT, PLAIN, WING. A nut having wings designed for manual turning without driver or wrench.

(1500) NUT, SELF-LOCKING, ASSEMBLED WASHER. A nut on which has been assembled a non-removable washer. An integral feature is incorporated for locking on the threads of a mating member.

(1600) NUT, SELF-LOCKING, BARREL. A semicylindrical nut with internal threads perpendicular to the center of the flat. An integral feature is incorporated for locking on the threads of a mating member.

(1700) NUT, SELF-LOCKING, BLIND RIVET. A metallic headed fastener having internal threads for a portion of the full length. It may have a smooth, hexagon or splined shank with an open or closed end. It is designed to be expanded tightly against the material it is being installed in by means of a special tool. The item must have a specified grip range. The grip range is the thickness of the material the item is being installed in. An integral feature is incorporated for locking on the threads of a mating member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

DEFINITIONS (Continued)

(1800) NUT, SELF-LOCKING CAP. A nut flat on the bottom and having 6 flat sides, the top is extended and closed over to protect the end of the bolt when assembled. An integral feature is incorporated for locking on the threads of a mating member.

(1900) NUT, SELF-LOCKING, CLINCH. A nut having a sleeve portion on its under side, which can be crimped or clinched to hold the item in place when inserted in a hole. An integral feature is incorporated for locking.

(2000) NUT, SELF-LOCKING, DOUBLE HEXAGON. A nut having 12 drive points and 24 sides. The bearing surface may be washer faced. An integral locking feature is incorporated in the design of the heads or in the threads.

(2100) NUT, SELF-LOCKING, EXTENDED WASHER, HEXAGON. A nut having 6 flat sides and an integral washer which extends beyond the flats or periphery. An integral feature is incorporated for locking on the threads of a mating member.

(2200) NUT, SELF-LOCKING, GANG CHANNEL. A nut having ears or lugs designed to hold it in position after its installation in a specially designed channel. An integral feature is incorporated for locking on the threads of a mating member.

(2300) NUT, SELF-LOCKING, HEXAGON. A nut having a flat bottom and 6 sides. An integral feature is incorporated for locking on the threads of a mating member.

(2400) NUT, SELF-LOCKING, PLATE. A nut with a flanged base of varied shapes which may be plain or mounted rivets, bolts, welding or integral prongs. An integral feature is incorporated for locking on the threads of mating member.

(2500) NUT, SELF-LOCKING, ROUND. A nut circular in shape, which may have holding or tightening features, such as slots, holes, protrusions in the periphery or flats. An integral feature is incorporated for locking on the threads of a mating member.

(2600) NUT, SELF-LOCKING, SLOTTED, HEXAGON. A nut having a flat bearing surface and 6 flat sides, with slots in its upper portion. An integral feature is incorporated for locking on the threads of a mating member.

(2700) NUT, SELF-LOCKING, SPLINE. A nut having an externally splined sleeve, which holds it in position when forced into a hole of slightly smaller diameter. An integral feature is incorporated for locking.

(2800) NUT, SHEET SPRING. A nut formed from sheet spring material, usually steel, into varying flat, concave, bent or curved designs, having apertures with suitable boss or bosses usually on the upper side capable of securely gripping a mating threaded member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

DEFINITIONS (Continued)

(2900) NUT, STAMPED. A nut formed from sheet spring material, usually steel, into various shapes, having the external appearance of a solid nut, and having an aperture with suitable bosses, lugs, notches, and/or slits capable of securely gripping a mating threaded member.

(3000) PUSH ON NUT. An item formed from sheet spring material into varying flat, concave, curved or nutlike design. It has an aperture with an elliptical-shaped hole or suitable lugs or prongs designed to retain threaded or unthreaded stud like projecting members. When pushed on, it grips by imbedding into the material of the projecting members, and does not mate with a thread helix.

4. GENERAL STATEMENTS

4.1 Selection Procedure

4.1.1 Document Selection. The applicable section shall be selected after reviewing the table of contents.

4.1.2 Part Number Selection (Preliminary). A preliminary selection of the applicable part number shall be made after reviewing the nominal parameters (sizes, materials, finishes) listed in the sections.

4.1.3 Part Number Selection (Final). A final selection of the applicable part number shall be made after viewing the detailed requirements specified in the referenced nut documents for suitability in the particular military equipment being designed (considering the application and environmental conditions).

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for preferred nuts are contained in the applicable nut document and associated procurement specification. If there is disagreement between the nominal parameters listed in this standard and the parameters specified in the applicable nut document or associated procurement specification, the parameters specified in the applicable nut document or associated procurement specification shall prevail.

6. NOTES

6.1 Dimensions. Dimensions shown in the sections contained herein are in inches.

6.2 Unified standard screw threads used in this standard are listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE I. UNIFIED STANDARD SCREW THREADS

NOMINAL SIZE (inches) - (threads per inch)		
.060-80 UNF	.625-11 UNC	1.500-6 UNC
.073-64 UNC	-18 UNF	-12 UNF
.086-56 UNC	-24 UNEF	-18 UNEF
-64 UNF		
	.750-10 UNC	1.625-12 UNF
.112-40 UNC	-16 UNF	-18 UNEF
-48 UNF	-20 UNEF	
		1.750-5 UNC
.138-32 UNC	.875-9 UNC	-12 UNF
-40 UNF	-14 UNF	-16 UNEF
	-20 UNEF	
.164-32 UNC		1.875-12 UNF
-36 UNF	1.000-8 UNC	
	-12 UNF	2.000-4.5 UNC
.190-24 UNC	-20 UNEF	-12 UNF
-32 UNF		-16 UNEF
	1.0625-12 UNF	
.250-20 UNC		2.125-16 UNEF
-28 UNF	1.125-7 UNC	
	-12 UNF	2.250-4.5 UNC
.3125-18 UNC	-18 UNEF	-12 UNF
-24 UNF		-16 UNEF
	1.1875-12 UNF	
.375-16 UNC		2.500-4 UNC
-24 UNF	1.250-7 UNC	-12 UNF
	-12 UNF	-16 UNEF
.4375-14 UNC	-18 UNEF	
-20 UNF		2.750-4 UNC
	1.3125-12 UNF	-16 UNEF
.500-13 UNC		
-20 UNF	1.375-6 UNC	3.000-4 UNC
-28 UNEF	-12 UNF	-16 UNEF
	-18 UNEF	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

6.3 Decimal equivalents rounded to three decimal places used in this standard to specify dimensions.

TABLE II. DECIMAL EQUIVALENTS (except for thread sizes).

1/64---.016	33/64---.516
1/32----------.031	17/32----------.531
3/64---.047	35/64---.547
1/16----------.062	9/16----------.562
5/64---.078	37/64---.578
3/32----------.094	19/32----------.594
7/64---.109	39/64---.609
1/8----------.125	5/8----------.625
9/64---.141	41/64---.641
5/32----------.156	21/32----------.656
11/64---.172	43/64---.672
3/16----------.188	11/16----------.688
13/64---.203	45/64---.703
7/32----------.219	23/32----------.719
15/64---.234	47/64---.734
1/4----------.250	3/4----------.750
17/64---.266	49/64---.766
9/32----------.281	25/32----------.781
19/64---.297	51/64---.797
5/16----------.312	13/16----------.812
21/64---.328	53/64---.828
11/32----------.344	27/32----------.844
23/64---.359	55/64---.859
3/8----------.375	7/8----------.875
25/64---.391	57/64---.891
13/32----------.406	29/32----------.906
27/64---.422	59/64---.922
7/16----------.438	15/16----------.938
29/64---.453	61/64---.953
15/32----------.469	31/32----------.969
31/64---.484	63/64---.984
1/2----------.500	

6.4 Code Letters. Generally, code letters used in this standard to indicate material, are placed as prefix of dash number (in place of first dash), and all other codes are placed as suffix of dash numbers.

6.4.1 When multiple code letters are used as suffix, they are arranged in alphabetical order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

CUSTODIANS:

Army - AR
Air Force - 99

PREPARING ACTIVITY:

Army - AR

REVIEW ACTIVITIES:

Army - AT, AV, GL
Navy - AS, SH
Air Force - 11, 17
DLA-IS
Other - FSS

AGENT:

DLA - IS

(Project 5310-1519)

USER ACTIVITIES:

Army - ME
Navy - SH, MC
Other - NS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 101

LOCKNUT, TUBE FITTING, BOSS CONNECTION

APPLICABLE DOCUMENTS: MS9099, MS9100, MS9553

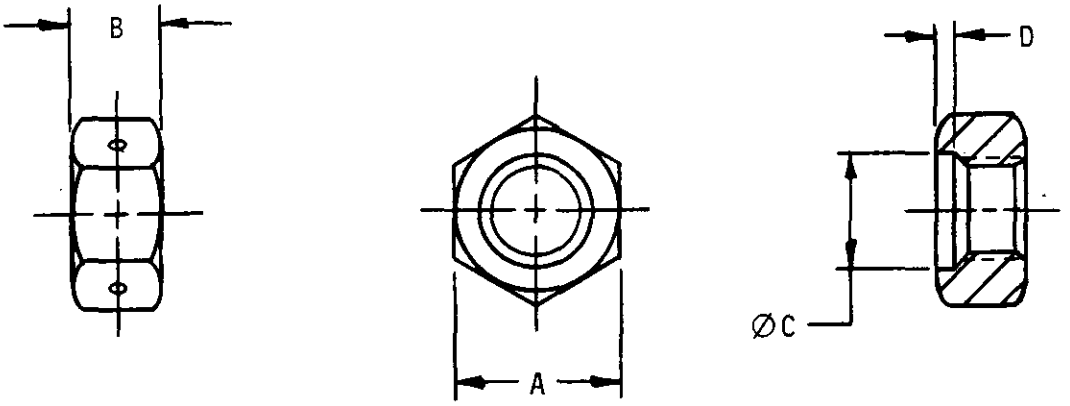


TABLE I.


Material					CRES		Aluminum alloy
Protective finish					Not specified		Anodize
Drilled/Not Drilled					Not drilled	Drilled	
Thread	A Nom	B Nom	ØC Nom	D Nom	MS9553 + Dash no.	MS9100 + Dash no.	MS9099 + Dash no.
.3125-24UNJF-3B	.562	.250	.483	.037	-02	-02	-02
.375-24UNJF-3B	.625	.250	.546	.037	-03	-03	-03
.4375-20UNJF-3B	.688	.281	.608	.042	-04	-04	-04
.500-20UNJF-3B	.750	.281	.670	.042	-05	-05	-05
.625-18UNJF-3B	.875	.297	.795	.042	-07	-07	-07
.750-16UNJF-3B	1.000	.344	.920	.042	-08	-08	-08
.875-14UNJF-3B	1.125	.391	1.045	.054	-10	-10	-10
1.000-12UNJ-3B	1.312	.438	1.210	.054	-11	-11	-11
1.0625-12UNJ-3B	1.375	.438	1.295	.054	-12	-12	-12
1.1875-12UNJ-3B	1.500	.438	1.417	.054	-14	-14	-14
1.3125-12UNJ-3B	1.625	.438	1.541	.054	-16	-16	-16
1.500-12UNJ-3B	1.812	.438	1.729	.054	-18	-18	-18
1.625-12UNJ-3B	1.938	.438	1.854	.054	-20	-20	-20
1.875-12UNJ-3B	2.188	.438	2.104	.054	-24	-24	-24
2.250-12UNJ-3B	2.562	.438	2.478	.054	-28	-28	-28
2.500-12UNJ-3B	2.812	.438	2.728	.054	-32	-32	-32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 201

NUT, PLAIN, BLIND RIVET, COUNTERSUNK HEAD

APPLICABLE DOCUMENTS: MS27130, NAS 1330

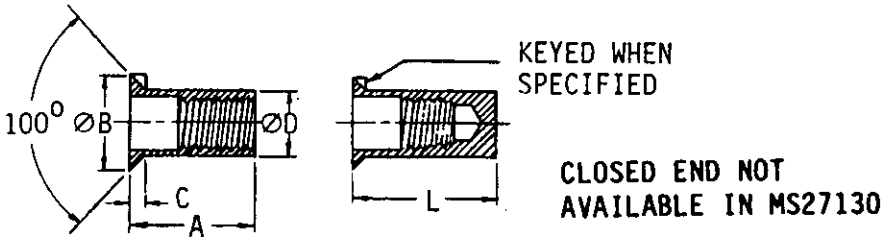

OPEN END TYPE CLOSED END TYPE

TABLE I.

Material / Protective finish									Aluminum alloy / Anodize		Carbon steel / Cadmium Plate		Alloy steel / Cadmium Plate	CRES / Passivate	
Thread		ØB Nom	C Max	ØD Nom	Grip range	A Nom Open End Keyless and Keyed	L Nom Closed End Keyless	L Nom Closed End Keyed	NAS 1330 +Dash no.	MS27130 +Dash no.	NAS 1330 +Dash no.	MS27130 +Dash no.	NAS 1330 +Dash no.	MS27130 +Dash no.	
.112	40UNC-3B	.263	.051	.155	.050-.081	.370	.525	.525	A04-81	-A81	S04-81	-S81	H04-81	C04-81	-CR81
					.081-.106	.395	.550	.550	A04-106	-A82	A04-106	-S82	H04-106	C04-106	-CR82
					.106-.131	.420	.575	.575	A04-131	-A83	S04-131	-S83	H04-131	C04-131	-CR83
					.131-.156	.450	.600	.600	A04-156	-A84	S04-156	-S84	H04-156	C04-156	-CR84
					.156-.181	.475	.625	.625	A04-181	-A85	S04-181	-S85	H04-181	C04-181	-CR85
					.181-.206	.500	--	--	--	-A86	--	-S86	--	--	-CR86
.138	32UNC-3B	.323	.063	.189	.065-.106	.500	.687	.812	A06-106	-A87	S06-106	-S87	H06-106	C06-106	-CR87
					.106-.161	.500	.687	.812	A06-161	-A88	S06-161	-S83	H06-161	C06-161	-CR88
					.161-.201	.562	.687	.812	A06-201	-A89	S06-201	-S89	H06-201	C06-201	-CR89
					.201-.241	.625	.812	.812	A06-241	-A90	S06-241	-S90	H06-241	C06-241	-CR90
					.241-.281	.625	.812	.812	A06-281	-A91	S06-281	-S91	H06-281	C06-281	-CR91
					.281-.321	.687	--	--	--	-A92	--	-S92	--	--	-CR92
.164	32UNC-3B	.355	.063	.221	.065-.106	.500	.687	.812	A08-106	-A93	S08-106	-S93	H08-106	C08-106	-CR93
					.106-.161	.500	.687	.812	A08-161	-A94	S08-161	-S94	H08-161	C08-161	-CR94
					.161-.201	.562	.687	.812	A08-201	-A95	S08-201	-S95	H08-201	C08-201	-CR95
					.201-.241	.625	.875	.875	A08-241	-A96	S08-241	-S96	H08-241	C08-241	-CR96
					.241-.281	.687	.875	.875	A08-281	-A97	S08-281	-S97	H08-281	C08-281	-CR97
					.281-.321	.687	--	--	--	-A98	--	-S98	--	--	-CR98
.190	24UNC-3B	.391	.065	.250	.065-.116	.578	.828	.828	--	-A127	--	-S127	--	--	-CR127
	32UNF-3B								A3-116	-A99	S3-116	-S99	H3-116	C3-116	-CR99
	24UNC-3B				.116-.166	.625	.875	.875	--	-A128	--	-S128	--	--	-CR128
	32UNF-3B								A3-166	-A100	S3-166	-S100	H3-166	C3-166	-CR100
	24UNC-3B				.166-.216	.687	.938	.938	--	-A129	--	-S129	--	--	-CR129
	32UNF-3B								A3-216	-A101	S3-216	-S101	H3-216	C3-216	-CR101
	24UNC-3B				.216-.266	.734	.984	.984	--	-A130	--	-S130	--	--	-CR130
	32UNF-3B								A3-266	-A102	S3-266	-S102	H3-266	C3-266	-CR102
	24UNC-3B				.266-.316	.781	1.031	1.031	--	-A131	--	-S131	--	--	-CR131
	32UNF-3B								A3-316	-A103	S3-316	-S103	H3-316	C3-316	-CR103
	24UNC-3B				.316-.366	.844	--	--	--	-A132	--	-S132	--	--	-CR132
	32UNF-3B								--	-A104	--	-S104	--	--	-CR104
.250	20UNC-3B	.529	.089	.332	.089-.151	.687	1.000	1.000	--	-A133	--	-S133	--	--	-CR133
	28UNF-3B								A4-151	-A105	S4-151	-S105	H4-151	C4-151	-CR105
	20UNC-3B				.151-.211	.750	1.062	1.062	--	-A134	--	-S134	--	--	-CR134
	28UNF-3B								A4-211	-A106	S4-211	-S106	H4-211	C4-211	-CR106
	20UNC-3B				.211-.271	.812	1.125	1.125	--	-A135	--	-S135	--	--	-CR135
	28UNF-3B								A4-271	-A107	S4-271	-S107	H4-271	C4-271	-CR107
	20UNC-3B				.271-.331	.875	1.187	1.187	--	-A136	--	-S136	--	--	-CR136
	28UNF-3B								A4-331	-A108	S4-331	-S108	H4-331	C4-331	-CR108
	20UNC-3B				.331-.391	.937	1.250	1.250	--	-A137	--	-S137	--	--	-CR137
	28UNF-3B								A4-391	-A109	S4-391	-S109	H4-391	C4-391	-CR109
	20UNC-3B				.391-.451	1.000	--	--	--	-A138	--	-S138	--	--	-CR138
	28UNF-3B								--	-A110	--	-S110	--	--	-CR110

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE I (CONT.)

Material / Protective finish	Thread	ØB Nom	C Max	ØD Nom	Grip range	A Nom Open End Keyless and Keyed	L Nom Closed End Keyless	L Nom Closed End Keyed	Aluminum alloy Anodize NAS 1330 +Dash no.	Aluminum alloy Anodize MS27130 +Dash no.	Carbon steel Alloy steel Cadmium plate NAS 1330 +Dash no.	Carbon steel Alloy steel Cadmium plate MS27130 +Dash no.	CRES Passivate NAS 1330 +Dash no.	CRES Passivate MS27130 +Dash no.
.3125	18UNC-3B	.656	.104	.413	.106-.181	.844	1.218	1.218	--	-A139	--	-S139	--	--	-CR139
	24UNF-3B								A5-181	-A111	S5-181	-S111	H5-181	C5-181	-CR111
	18UNC-3B				.181-.256	.937	1.312	1.312	--	-A140	--	-S140	--	--	-CR140
	24UNF-3B								A5-256	-A112	S5-256	-S112	H5-256	C5-256	-CR112
	18UNC-3B				.256-.331	1.000	1.406	1.406	--	-A141	--	-S141	--	--	-CR141
	24UNF-3B								A5-331	-A113	S5-331	-S113	H5-331	C5-331	-CR113
	18UNC-3B				.331-.406	1.093	1.468	1.468	--	-A142	--	-S142	--	--	-CR142
	24UNF-3B								A5-406	-A114	S5-406	-S114	H5-406	C5-406	-CR114
	18UNC-3B				.406-.481	1.156	--	--	--	-A143	--	-S143	--	--	-CR143
	24UNF-3B								--	-A115	--	-S115	--	--	-CR115
	18UNC-3B				.481-.556	1.250	--	--	--	-A144	--	-S144	--	--	-CR144
	24UNF-3B								--	-A116	--	-S116	--	--	-CR116
.375	16UNC-3B	.770	.124	.490	.125-.211	.938	1.375	1.375	--	-A145	--	-S145	--	--	-CR145
	24UNF-3B								A6-211	-A117	S6-211	-S117	H6-211	C6-211	-CR117
	16UNC-3B				.211-.296	1.031	1.468	1.468	--	-A146	--	-S146	--	--	-CR146
	24UNF-3B								A6-296	-A118	S6-296	-S118	H6-296	C6-296	-CR118
	16UNC-3B				.296-.381	1.125	1.562	1.562	--	-A147	--	-S147	--	--	-CR147
	24UNF-3B								A6-381	-A119	S6-381	-S119	H6-381	C6-381	-CR119
	16UNC-3B				.381-.466	1.219	1.656	1.656	--	-A148	--	-S148	--	--	-CR148
	24UNF-3B								A6-466	-A120	S6-466	-S120	H6-466	C6-466	-CR120
	16UNC-3B				.466-.551	1.312	--	--	--	-A149	--	-S149	--	--	-CR149
	24UNF-3B								--	-A121	--	-S121	--	--	-CR121
	16UNC-3B				.551-.636	1.422	--	--	--	-A150	--	-S150	--	--	-CR150
	24UNF-3B								--	-A122	--	-S122	--	--	-CR122
.500	13UNC-3B	.906	.124	.625	.125-.226	.984	--	--	--	-A151	--	-S151	--	--	-CR151
	20UNF-3B								--	-A123	--	-S123	--	--	-CR123
	13UNC-3B				.226-.326	1.094	--	--	--	-A152	--	-S152	--	--	-CR152
	20UNF-3B								--	-A124	--	-S124	--	--	-CR124
	13UNC-3B				.326-.426	1.218	--	--	--	-A153	--	-S153	--	--	-CR153
	20UNF-3B								--	-A125	--	-S125	--	--	-CR125
	13UNC-3B				.426-.526	1.312	--	--	--	-A154	--	-S154	--	--	-CR154
	20UNF-3B								--	-A126	--	-S126	--	--	-CR126
.500	20UNF-3B	.990	.154	.640	.156-.276	1.188	1.781	1.781	A8-276	--	S8-276	--	H8-276	C8-276	--
					.276-.396	1.312	1.906	1.906	A8-396	--	S8-396	--	H8-396	C8-396	--
					.396-.516	1.438	2.031	2.031	A8-516	--	S8-516	--	H8-516	C8-516	--
					.516-.636	1.578	2.172	2.172	A8-636	--	S8-636	--	H8-636	C8-636	--

NOTE:

NAS 1330

Letter between dash numbers indicates type:

"-" Keyless open end
"K" Keyed open end
"B" Keyless closed end
"KB" Keyed closed end

MS 27130

"K" After dash number for a keyed nut

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 202

NUT, PLAIN, BLIND RIVET, FLAT HEAD

APPLICABLE DOCUMENTS: MS27130, NAS1329

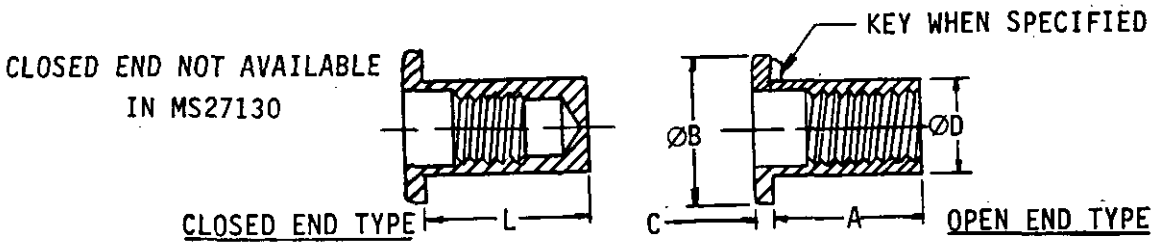


TABLE I

Material								Aluminum alloy	
Protective finish								Anodize	
Thread		ØB Nom	C Nom	ØD Max	Grip range	A Nom Open end	L Nom Closed and		NAS 1329 + Dash no.	MS27130 + Dash no.
						Keyless and keyed	Keyless	Keyed		
.112	40UNC-3B	.270	.025	.155	.010 - .060 .060 - .085 .085 - .110 .110 - .135 .135 - .160 .160 - .185	.345 .370 .400 .425 .450 .480	.500 .525 .555 .580 .605 --	.500 .525 .555 .580 .605 --	A04-60 A04-85 A04-110 A04-135 A04-160 --	-A1 -A2 -A3 -A4 -A5 -A6
.138	32UNC-3B	.325	.032	.189	.010 - .075 .075 - .120 .120 - .160 .160 - .200 .200 - .240 .240 - .280	.438 .500 .500 .562 .625 .687	.625 .625 .750 .750 .750 --	.750 .750 .750 .750 .750 --	A06-75 A06-120 A06-160 A06-200 A06-240 --	-A7 -A8 -A9 -A10 -A11 -A12
.164	32UNC-3B	.357	.032	.221	.010 - .075 .075 - .120 .120 - .160 .160 - .200 .200 - .240 .240 - .280	.438 .500 .500 .625 .625 .687	.625 .625 .750 .750 .875 --	.750 .750 .750 .750 .875 --	A08-75 A08-120 A08-160 A08-200 A08-240 --	-A13 -A14 -A15 -A16 -A17 -A18

Carbon steel		Alloy steel	CRES		Brass
Cadmium plate			Passivate		None
NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.
S04-60 S04-85 S04-110 S04-135 S04-160 --	-S1 -S2 -S3 -S4 -S5 -S6	H04-60 H04-85 H04-110 H04-135 H04-160 --	-CR1 -CR2 -CR3 -CR4 -CR5 -CR6	C04-60 C04-85 C04-110 C04-135 C04-160 --	-B1 -B2 -B3 -B4 -B5 -B6
S06-75 S06-120 S06-160 S06-200 S06-240 --	-S7 -S8 -S9 -S10 -S11 -S12	H06-75 H06-120 H06-160 H06-200 H06-240 --	-CR7 -CR8 -CR9 -CR10 -CR11 -CR12	C06-75 C06-120 C06-160 C06-200 C06-240 --	-B7 -B8 -B9 -B10 -B11 -B12
S08-75 S08-120 S08-160 S08-200 S08-240 --	-S13 -S14 -S15 -S16 -S17 -S18	H08-75 H08-120 H08-160 H08-200 H08-240 --	-CR13 -CR14 -CR15 -CR16 -CR17 -CR18	C08-75 C08-120 C08-160 C08-200 C08-240 --	-B13 -B14 -B15 -B16 -B17 -B18

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE I (CONT.)

Material								Aluminum alloy	
Protective finish								Anodize	
Thread		ØB Nom	C Nom	ØD Max	Grip range	A Nom Open end Keyless and keyed	L Nom Closed and Keyless	L Nom Closed and Keyed	NAS 1329 + Dash no.	MS27130 + Dash no.
.190	24UNC-3B	.406	.038	.250	.010 - .080	.531	--	--	--	-A19
					.080 - .130	.594	--	--	--	-A20
					.130 - .180	.641	--	--	--	-A21
					.180 - .230	.703	--	--	--	-A22
					.230 - .280	.750	--	--	--	-A23
					.280 - .330	.797	--	--	--	-A24
	32UNC-3B	.406	.038	.250	.010 - .080	.531	.781	.781	A3-80	-A25
					.080 - .130	.594	.843	.843	A3-130	-A26
					.130 - .180	.641	.891	.891	A3-180	-A27
					.180 - .230	.703	.953	.953	A3-230	-A28
					.230 - .280	.750	1.000	1.000	A3-280	-A29
					.280 - .330	.797	--	--	--	-A30
.250	20UNC-3B	.475	.058	.332	.020 - .080	.625	--	--	--	-A31
					.080 - .140	.687	--	--	--	-A32
					.140 - .200	.750	--	--	--	-A33
					.200 - .260	.812	--	--	--	-A34
					.260 - .320	.875	--	--	--	-A35
					.320 - .380	.937	--	--	--	-A36
	28UNF-3B	.475	.058	.332	.020 - .080	.625	.937	.937	A4-80	-A37
					.080 - .140	.687	1.000	1.000	A4-140	-A38
					.140 - .200	.750	1.062	1.062	A4-200	-A39
					.200 - .260	.812	1.125	1.125	A4-260	-A40
					.260 - .320	.875	1.187	1.187	A4-320	-A41
					.320 - .380	.937	--	--	--	-A42

Carbon steel		Alloy steel	CRES		Brass
Cadmium plate			Passivate		None
NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.
--	-S19	--	-CR19	--	-B19
--	-S20	--	-CR20	--	-B20
--	-S21	--	-CR21	--	-B21
--	-S22	--	-CR22	--	-B22
--	-S23	--	-CR23	--	-B23
--	-S24	--	-CR24	--	-B24
S3-80	-S25	H3-80	-CR25	C3-80	-B25
S3-130	-S26	H3-130	-CR26	C3-130	-B26
S3-180	-S27	H3-180	-CR27	C3-180	-B27
S3-230	-S28	H3-230	-CR28	C3-230	-B28
S3-280	-S29	H3-280	-CR29	C3-280	-B29
--	-S30	--	-CR30	--	-B30
--	-S31	--	-CR31	--	-B31
--	-S32	--	-CR32	--	-B32
--	-S33	--	-CR33	--	-B33
--	-S34	--	-CR34	--	-B34
--	-S35	--	-CR35	--	-B35
--	-S36	--	-CR36	--	-B36
S4-80	-S37	H4-80	-CR37	C4-80	-B37
S4-140	-S38	H4-140	-CR38	C4-140	-B38
S4-200	-S39	H4-200	-CR39	C4-200	-B39
S4-260	-S40	H4-260	-CR40	C4-260	-B40
S4-320	-S41	H4-320	-CR41	C4-320	-B41
--	-S42	--	-CR42	--	-B42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE II

Material ----------								
Protective finish ----------								
Thread		ØB Nom	C Nom	ØD Max	Grip range	A Nom Open end Keyless and keyed	L Nom Closed end Keyless	L Nom Closed end Keyed
.3125	18UNC-3B	.665	.062	.413	.030 - .125	.750	--	--
					.125 - .200	.875	--	--
					.200 - .275	.937	--	--
					.275 - .350	1.032	--	--
					.350 - .425	1.125	--	--
					.425 - .500	1.187	--	--
	24UNF-3B	.665	.062	.413	.030 - .125	.750	1.187	1.187
					.125 - .200	.875	1.281	1.281
					.200 - .275	.937	1.343	1.343
					.275 - .350	1.032	1.437	1.437
					.350 - .425	1.125	--	--
					.425 - .500	1.187	--	--

Aluminum alloy		Carbon steel		Alloy steel	CRES		Brass
Anodize		Cadmium plate			Passivate		None
NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.
--	-A43	--	-S43	--	-CR43	--	-B43
--	-A44	--	-S44	--	-CR44	--	-B44
--	-A45	--	-S45	--	-CR45	--	-B45
--	-A46	--	-S46	--	-CR46	--	-B46
--	-A47	--	-S47	--	-CR47	--	-B47
--	-A48	--	-S48	--	-CR48	--	-B48
A5-125	-A49	S5-125	-S49	H5-125	-CR49	C5-125	-B49
A5-200	-A50	S5-200	-S50	H5-200	-CR50	C5-200	-B50
A5-275	-A51	S5-275	-S51	H5-275	-CR51	C5-275	-B51
A5-350	-A52	S5-350	-S52	H5-350	-CR52	C5-350	-B52
--	-A53	--	-S53	--	-CR53	--	-B53
--	-A54	--	-S54	--	-CR54	--	-B54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE II (CONT.)

Material								Aluminum alloy	
Protective finish								Anodize	
Thread		ØB Nom	C Nom	ØD Max	Grip range	A Nom Open end Keyless and keyed	L Nom Closed end Keyless	L Nom Closed end Keyed	NAS 1329 + Dash no.	MS27130 + Dash no.
.375	16UNC-3B	.781	.088	.490	.030 - .115	.844	--	--	--	-A55
					.115 - .200	.938	--	--	--	-A56
					.200 - .285	1.031	--	--	--	-A57
					.285 - .370	1.125	--	--	--	-A58
					.370 - .455	1.218	--	--	--	-A59
					.455 - .540	1.312	--	--	--	-A60
	24UNF-3B	.781	.088	.490	.030 - .115	.844	1.281	1.281	A6-115	-A61
					.115 - .200	.938	1.375	1.375	A6-200	-A62
					.200 - .285	1.031	1.468	1.468	A6-285	-A63
					.285 - .370	1.125	1.562	1.562	A6-370	-A64
					.370 - .455	1.218	--	--	--	-A65
					.455 - .540	1.312	--	--	--	-A66
.500	13UNC-3B	.906	.085	.625	.050 - .150	.906	--	--	--	-A67
					.150 - .250	1.031	--	--	--	-A68
					.250 - .350	1.141	--	--	--	-A69
					.350 - .450	1.250	--	--	--	-A70
	20UNF-3B	.906	.085	.625	.050 - .150	.906	--	--	--	-A71
					.150 - .250	1.031	--	--	--	-A72
					.250 - .350	1.141	--	--	--	-A73
					.350 - .450	1.250	--	--	--	-A74
		1.000	.125	.640	.025 - .145	1.062	1.656	1.656	A8-145	--
					.145 - .265	1.188	1.781	1.781	A8-265	--
					.265 - .385	1.312	1.906	1.906	A8-385	--
					.385 - .505	1.453	2.156	2.156	A8-505	--

Carbon steel		Alloy steel	CRES		Brass
Cadmium plate			Passivate		None
NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.	NAS 1329 + Dash no.	MS27130 + Dash no.
--	-S55	--	-CR55	--	-B55
--	-S56	--	-CR56	--	-B56
--	-S57	--	-CR57	--	-B57
--	-S58	--	-CR58	--	-B58
--	-S59	--	-CR59	--	-B59
--	-S60	--	-CR60	--	-B60
S6-115	-S61	H6-115	-CR61	C6-115	-B61
S6-200	-S62	H6-200	-CR62	C6-200	-B62
S6-285	-S63	H6-285	-CR63	C6-285	-B63
S6-370	-S64	H6-370	-CR64	C6-370	-B64
--	-S65	--	-CR65	--	-B65
--	-S66	--	-CR66	--	-B66
--	-S67	--	-CR67	--	-B67
--	-S68	--	-CR68	--	-B68
--	-S69	--	-CR69	--	-B69
--	-S70	--	-CR70	--	-B70
--	-S71	--	-CR71	--	-B71
--	-S72	--	-CR72	--	-B72
--	-S73	--	-CR73	--	-B73
--	-S74	--	-CR74	--	-B74
S8-145	--	H8-145	--	C8-145	--
S8-265	--	H8-265	--	C8-265	--
S8-385	--	H8-385	--	C8-385	--
S8-505	--	H8-505	--	C8-505	--

NOTE:

NAS 1329

Letter between dash numbers indicates type.
"-" Keyless open end
"K" Keyed open end
"B" Keyless closed end
"KB" Keyed closed end

MS 27130

"K" after dash number for a keyed nut

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 301
NUT, PLAIN, CAP, LOW AND HIGH CROWN
APPLICABLE DOCUMENTS: MS24679, MS24680

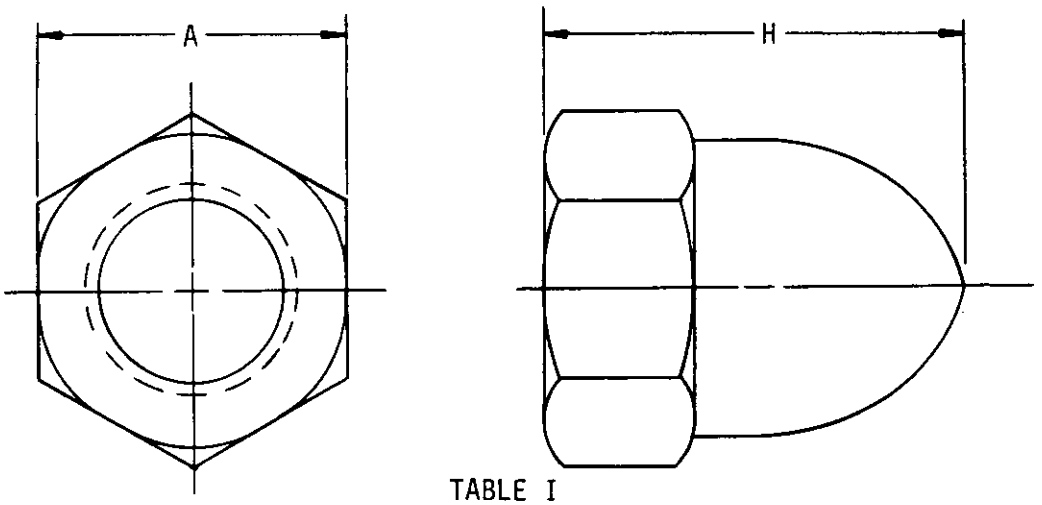



TABLE I


Material ----------				Low Crown			High Crown		
				Carbon steel	CRES	Brass	Carbon steel	CRES	Brass
Protective finish ----------				Cadmium plate	Passivate	Black oxide	Cadmium plate	Passivate	Black oxide
Thread (-2B)		A Nom	H Nom	1/ MS24679 + Dash no.			2/ MS24680 + Dash no.		
.138	32UNC	.312	.34	-1	-21	-411	--	--	--
			.42	--	--	--	-1	-21	-411
	40UNF		.34	-61	-81	-201	--	--	--
			.42	--	--	--	-61	-81	-201
.164	32UNC	.312	.34	-2	-22	-412	--	--	--
			.42	--	--	--	-2	-22	-412
	36UNF		.34	-62	-82	-202	--	--	--
			.42	--	--	--	-62	-82	-202
.190	24UNC	.375	.41	-3	-23	-413	--	--	--
			.52	--	--	--	-3	-23	-413
	32UNF		.41	-63	-83	-203	--	--	--
			.52	--	--	--	-63	-83	-203
.250	20UNC	.438	.47	-5	-25	-415	--	--	--
			.59	--	--	--	-5	-25	-415
	28UNF		.47	-65	-85	-205	--	--	--
			.59	--	--	--	-65	-85	-205
.3125	18UNC	.500	.53	-6	-26	-416	--	--	--
			.69	--	--	--	-6	-26	-416
	24UNF		.53	-66	-86	-206	--	--	--
			.69	--	--	--	-66	-86	-206
.375	16UNC	.562	.62	-7	-27	-417	--	--	--
			.78	--	--	--	-7	-27	-417
	24UNF		.62	-67	-87	-207	--	--	--
			.78	--	--	--	-67	-87	-207
.500	13UNC	.750	.81	-9	-29	-419	--	--	--
			1.03	--	--	--	-9	-29	-419
	20UNF		.81	-69	-89	-209	--	--	--
			1.03	--	--	--	-69	-89	-209
.625	11UNC	.938	1.00	-11	-31	-421	--	--	--
			1.28	--	--	--	-11	-31	-421
	18UNF		1.00	-71	-91	-211	--	--	--
			1.28	--	--	--	-71	-91	-211
.750	10UNC	1.062	1.16	-12	-32	-422	--	--	--
			1.45	--	--	--	-12	-32	-422
	16UNF		1.16	-72	-92	-212	--	--	--
			1.45	--	--	--	-72	-92	-212
1.000	8UNC	1.438	1.55	-14	-34	-424	--	--	--
			1.97	--	--	--	-14	-34	-424
	12UNF		1.55	-74	-94	-212	--	--	--
			1.97	--	--	--	-74	-94	-214
1.250	7UNC	1.312	1.95	-16	-36	-426	--	--	--
			2.47	--	--	--	-16	-36	-426
	12UNF		1.95	-76	-96	-216	--	--	--
			2.47	--	--	--	-76	-96	-216

1/ - Low crown
2/ - High crown


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 401
NUT, PLAIN, CASTELLATED, HEXAGON
APPLICABLE DOCUMENTS: MS59358, MS9359, AN310

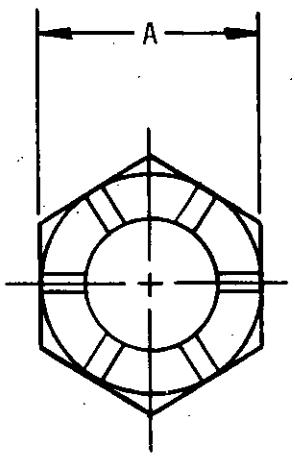

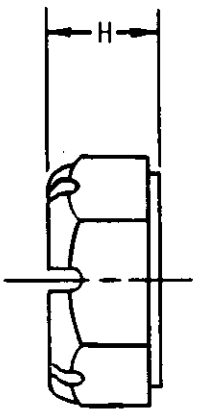

CONFIGURATION OF AN310

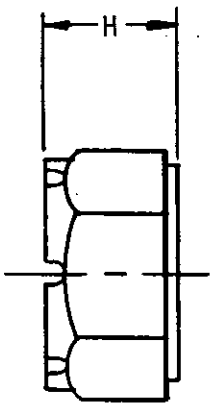

CONFIGURATION OF MS9358 & MS9359

TABLE I

Material						Aluminum alloy	Steel	CRES		
Protective finish						Anodize	Cadmium plate	Passivate	None	Silverplate
Thread		A Nom	H Nom	Tensile Strength min(lbs.) Steel	Tensile Strength min(lbs.) Al alloy	AN310 + Dash no.	AN310 + Dash no.	AN310 + Dash no.	MS9358 + Dash no.	MS9359 + Dash no.
.164	36UNJF-3B	.344	.219	--	--	--	--	--	-08	-08
.190	32UNF-3B	.375	.250	2210	1100	D3	-3	C-3	--	--
	32UNJF-3B			--	--	--	--	--	-09	-09
.250	28UNF-3B	.438	.282	4080	2030	D4	-4	C-4	--	--
	28UNJF-3B			--	--	--	--	--	-10	-10
.3125	24UNF-3B	.500	.328	6500	2220	D5	-5	C5	--	--
	24UNJF-3B			--	--	--	--	--	-11	-11
.375	24UNJF-3B	.563	.406	10100	5020	D6	-6	C6	--	--
	24UNJF-3B			--	--	--	--	--	-12	-12
.4375	20UNF-3B	.625	.454	13600	6750	D7	-7	C7	--	--
	20UNJF-3B	.684		--	--	--	--	--	-13	-13
.500	20UNF-3B	.750	.562	18500	9180	D8	-8	C8	--	--
	20UNJF-3B			--	--	--	--	--	-14	-14
.625	18UNF-3B	1.000	.718	30100	14900	D10	-10	C10	--	--
	[illegible]	.934		--	--	--	--	--	-16	-16
.750	16UNF-3B	1.125	.812	44000	21800	D12	-12	C12	--	--
	16UNJF-3B	1.062		--	--	--	--	--	-17	-17
.875	14UNF-3B	1.313	.906	60000	29800	D14	-14	C14	--	--
	14UNJF-3B	1.250		--	--	--	--	--	-18	-18
1.000	12UNF-3B	1.500	1.000	80000	40000	D15	-15	C15	--	--
	12UNJF-3B	1.433		--	--	--	--	--	-19	-19
1.125	12UNF-3B	1.688	1.156	101800	50500	D18	-18	C18	--	--
1.250	12UNF-3B	1.875	1.250	130200	64400	D20	-20	C20	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 501

NUT, PLAIN, CLINCH

APPLICABLE DOCUMENT: MS21331

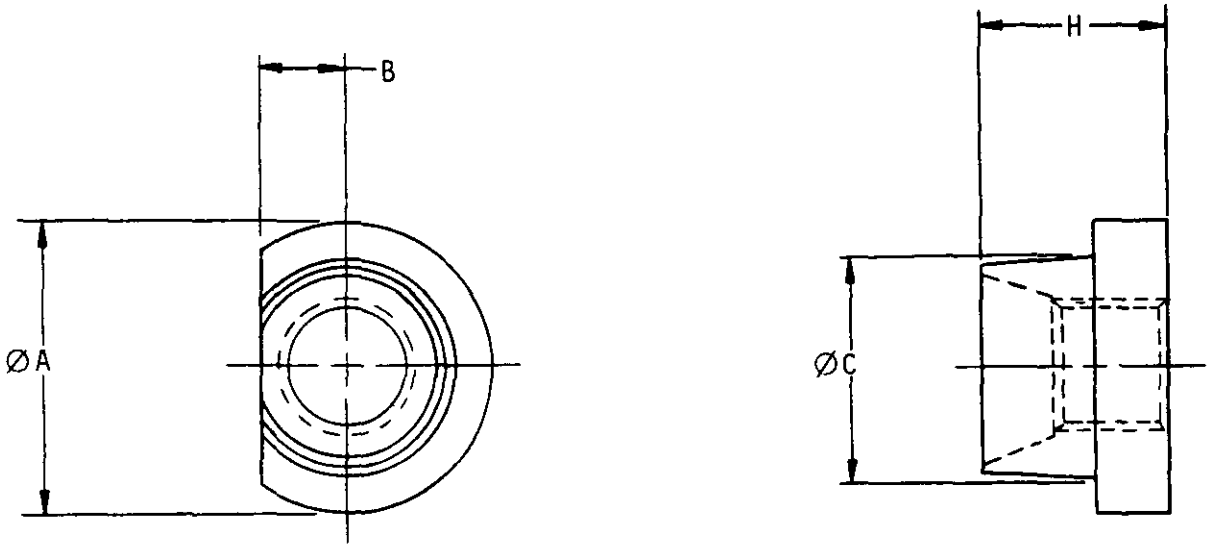



TABLE I

Material ----------						Carbon Steel
Protective finish ----------						Cadmium plate
Thread		ØA Nom	B Max	ØC Max	H Max	MS21331 +Dash no.
.190	24UNC-2B	.562	.152	.437	.270	-1
	32UNF-2B					-2
.250	20UNC-2B					-3
	28UNF-2B					-4
	20UNC-2B	.625	.182	.500	.364	-5
	28UNF-2B					-6
.3125	18UNC-2B					-7
	24UNF-2B					-8
	18UNC-2B	.688	.215	.562	.473	-9
	24UNF-2B					-10
.375	16UNC-2B					-11
	24UNF-2B					-12
.3125	18UNC-2B	.750	.250	.625	.505	-13
	24UNF-2B					-14
.375	16UNC-2B					-15
	24UNF-2B					-16
.4375	14UNC-2B	.875	.277	.750	.505	-17
	20UNF-2B					-18
	14UNC-2B	.938	.344	.812	.599	-19
	20UNF-2B					-20
.500	13UNC-2B					-21
	20UNF-2B					-22
	13UNC-2B	1.000	.375	.875	.630	-23
	20UNF-2B					-24
.625	11UNC-2B	1.125	.438	1.000	.693	-27
	18UNF-2B					-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 502
NUT, PLAIN, CLINCH (FLOATING, 400°F)

APPLICABLE DOCUMENT: MIL-N-45938/11

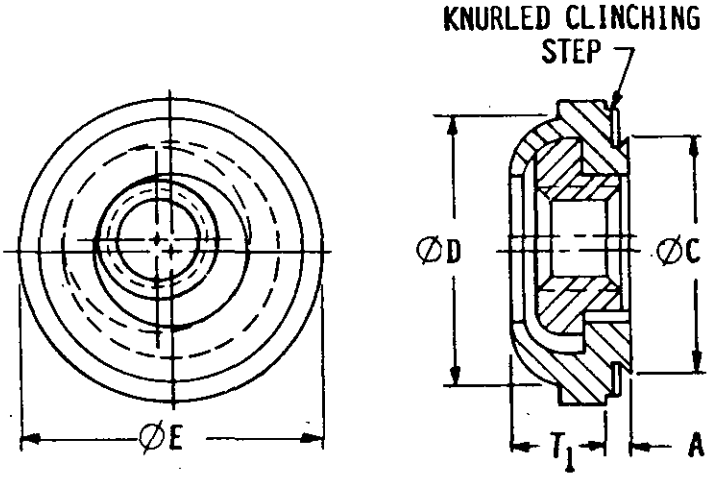

PLAIN

TABLE I

Material	Carbon Steel	CRES
Protective Finish	Cadmium Plate	Passivate

Thread (-2B)	Panel Thickness Min	A Max	ØC Max	ØD Max	ØE Max	T_1 Max	M45938/11 + Dash No.	
.112-40UNC	.040 / .056	.038 / .054	.289	.290	.36	.13	-1 / -2	-1C / -2C
.138-32UNC	.040 / .056	.038 / .054	.327	.330	.39	.13	-3 / -4	-3C / -4C
.164-32UNC	.040 / .056	.038 / .054	.367	.365	.44	.13	-5 / -6	-5C / -6C
.190-24UNC	.040 / .056	.038 / .054	.405	.405	.47	.16	-7 / -8	-7C / -8C
.190-32UNF	.040 / .056	.038 / .054	.405	.405	.47	.16	-9 / -10	-9C / -10C
.250-20UNC / .250-28UNF	.056	.054	.514	.510	.60	.20	-11 / -12	-11C / -12C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 503

NUT, PLAIN, CLINCH, FLOATING, KNURLED COLLAR, MINIATURE, 450°F AND 600°F

APPLICABLE DOCUMENT: MIL-N-45938/13

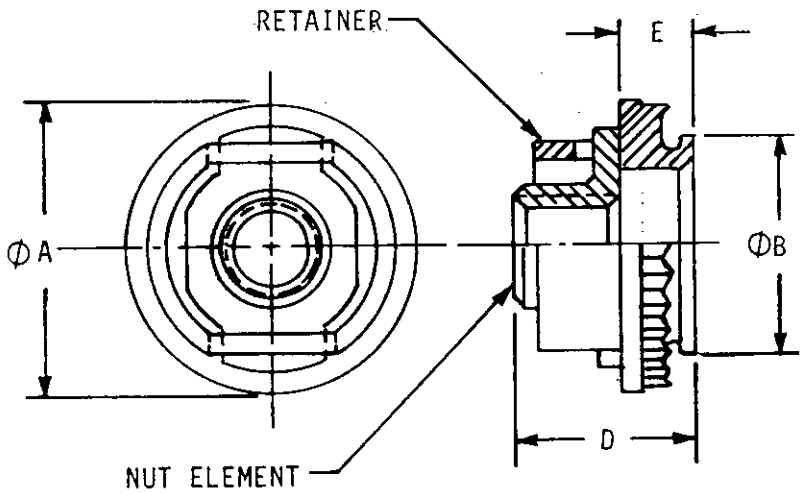


TABLE I

Material						Alloy Steel	Cres
Protective Finish						Cadmium Plate & Dry Film	Silver Plate & Dry Film
Performance Temperature						450°F	600°F
Thread (-3B)	Panel Thickness Min	ØA Nom	ØB Max	D Max	E Nom	M45938/13 + Dash No.	
.1120-40 UNJC	.040	.320	.249	.224	.077	-2	-2C
.1380-32 UNJC						-3	-3C
.1640-32 UNJC	.040	.410	.311	.265	.097	-4	-4C
.1900-32 UNJF				.285		-5	-5C
.2500-20 UNJC	.074	.500	.374	.360	.145	-6	-6C
.2500-28 UNJF						-7	-7C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 504

NUT, PLAIN, CLINCH, FLOATING, KNURLED COLLAR, 450°F AND 600°F

APPLICABLE DOCUMENT: MIL-N-45938/14

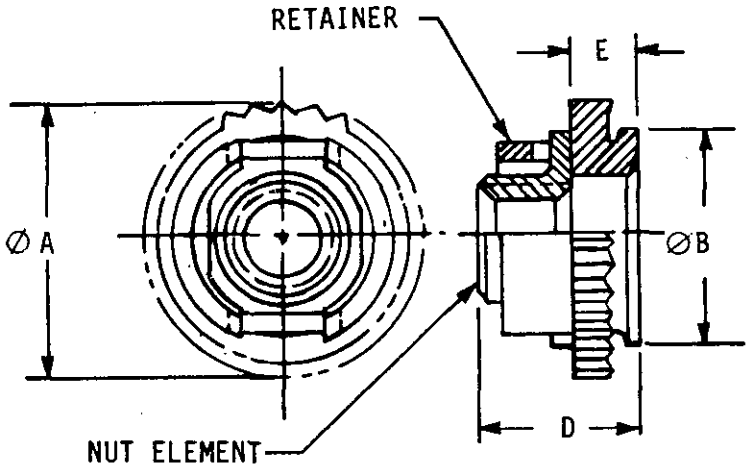


TABLE I

Material						Alloy Steel	Cres
Protective Finish						Cadmium Plate & Dry Film	Silver Plate & Dry Film
Performance Temperature						450°F	600°F
Thread (-3B)	Panel Thick-ness Min	∅A Nom	∅B Max	D Max	E Nom	M45938/14 + Dash No.	
.1120-40 UNJC	.045	.350	.280	.225	.088	-2	-2C
.1380-32 UNJC						-3	-3C
.1640-32 UNJC	.060	.450	.374	.275	.115	-4	-4C
.1900-32 UNJF				.295		-5	-5C
.2500-20 UNJC	.090	.560	.499	.365	.141	-6	-6C
.2500-28 UNJF						-7	-7C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 505
NUT, PLAIN, CLINCH (FLUSH)

APPLICABLE DOCUMENT: MIL-N-45938/4

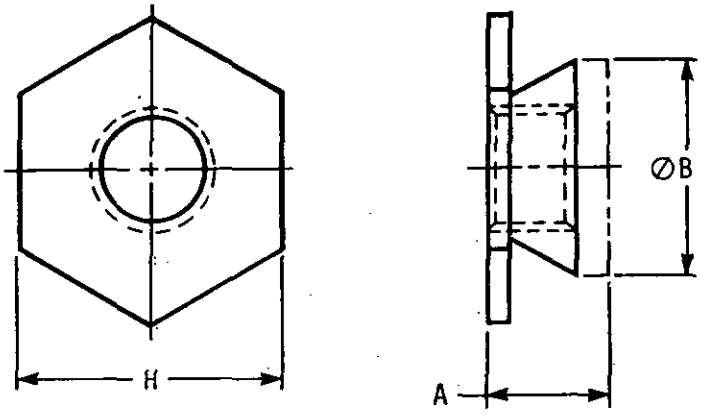


TABLE I

Material				Carbon Steel
Protective finish				Passivate
Thread	A Max	H Nom	∅B Max	M45938/4 + Dash no.
.086-56UNC-2B	.060	.188	.171	-1
	.090			-2
.112-40UNC-2B	.060	.188	.171	-3
	.090			-4
.138-32UNC-2B	.060	.250	.212	-5
	.090			-6
.164-32UNC-2B	.060	.312	.289	-7
	.090			-8
.190-24UNC-2B	.060	.344	.311	-14
	.090			-15
.190-32UNF-2B	.060	.344	.311	-9
	.090			-10
.250-28UNF-2B	.120	.375	.343	-11
	.151			-12
	.182			-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 506

NUT, PLAIN, CLINCH (FLUSH)

APPLICABLE DOCUMENT: MS 3214

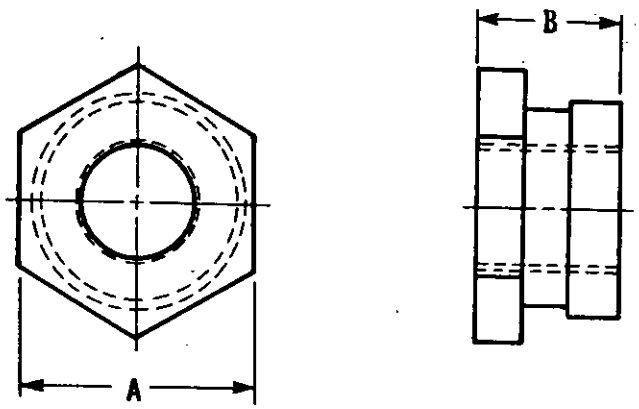


TABLE I

Material				CRES
Protective finish				Passivate
Thread		A Nom	B Nom	MS3214 + Dash no.
.086	-56 UNC-2B	3/16	.058	1
		1/4		2
.112	-40 UNC-2B	3/16		3
		1/4		4
.112	-40 UNC-2B	3/16	.085	5
		1/4		6
.138	-32 UNC-2B	1/4		7
		5/16		8
.164	-32 UNC-2B	5/16		9
.190	-32 UNF-2B	5/16		10
.112	-40 UNC-2B	3/16	.117	11
		1/4		12
.138	-32 UNC-2B	1/4		13
		5/16		14
.164	-32 UNC-2B	5/16		15
.190	-32 UNF-2B	5/16		16
.250	-20 UNC-2B	7/16		17
	-28 UNF-2B	7/16		18
.138	-32 UNC-2B	1/4	.147	19
		5/16		20
.164	-32 UNC-2B	5/16		21
.190	-32 UNF-2B	5/16		22
.250	-20 UNC-2B	7/16		23
	-28 UNF-2B	7/16		24
.138	-32 UNC-2B	1/4	.177	25
		5/16		26
.164	-32 UNC-2B	5/16		27
.190	-32 UNF-2B	5/16		28
.250	-20 UNC-2B	7/16		29
	-28 UNF-2B	7/16		30
.138	-32 UNC-2B	1/4	.236	31
		5/16		32
.164	-32 UNC-2B	5/16		33
.190	-32 UNF-2B	5/16		34
.250	-20 UNC-2B	7/16		35
	-28 UNF-2B	7/16		36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 507

NUT, PLAIN, CLINCH (HEXAGON SHANK)

APPLICABLE DOCUMENT: MIL-N-45938/2

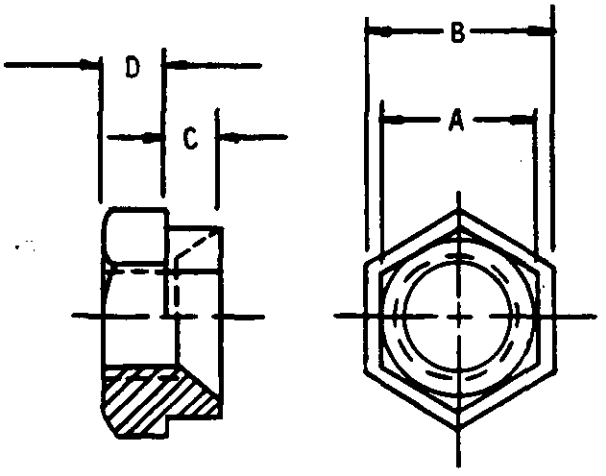


TABLE I

Material ----------						Carbon steel
Protective finish ----------						Cadmium plate
Thread	A Nom	B Nom	C Nom	D Nom	Sheet thk max	M45938/2 +Dash no.
.138-32UNC-2B	.244	.297	.078	.109	.036	-1
.164-32UNC-2B	.305	.368	.094	.125	.047	-2
.190-32UNF-2B	.305	.368	.094	.125	.047	-3
.250-28UNF-2B	.429	.521	.125	.172	.062	-4
.3125-24UNF-2B	.491	.584	.156	.203	.078	-5
.375-24UNF-2B	.551	.670	.188	.234	.094	-6
.500-20UNF-2B	.742	.860	.250	.297	.125	-7

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 508

NUT, PLAIN, CLINCH (KNURLED COLLAR, 450°F AND 600°F)

APPLICABLE DOCUMENT: MIL-N-45938/3

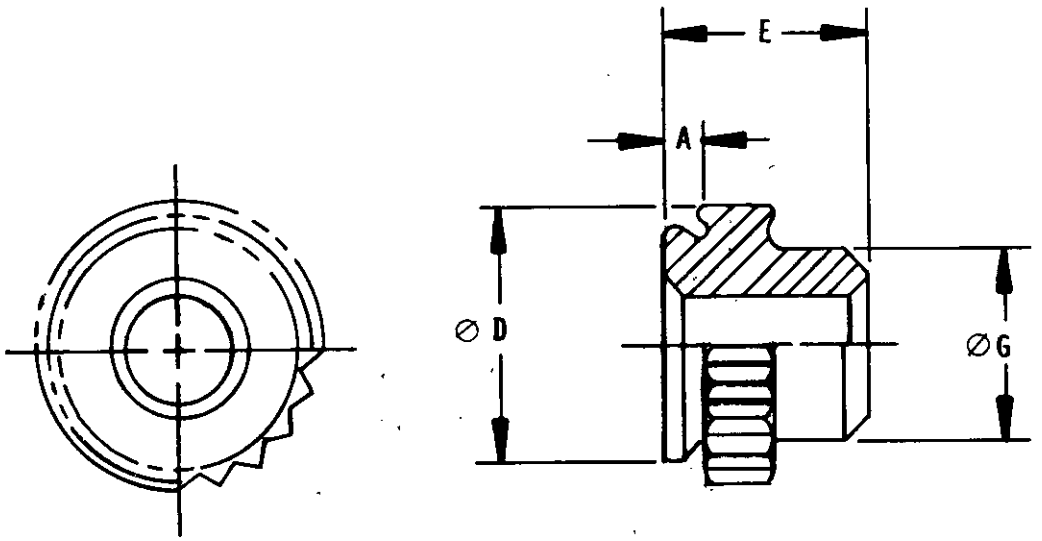


TABLE I

Material						Steel alloy (450°F)	CRES 303 (450°F)	CRES A-286 (600°F)
Protective finish						Cadmium Plate	Passivate	Silver Plate
Thread (-3B)	Sheet Thk Min	A Nom	∅ D Nom	E Nom	∅ G Nom	M45938/3 + Dash No.		
.086-56UNJC	.040	.030	.260	.178	.125	-1	-1C	--
			.190	.140	.106	-2	--	-2C
.112-40UNJC	.040	.030	.260	.178	.160	-3	-3C	--
			.220	.160	.135	-4	--	-4C
.138-32UNJC	.040	.030	.290	.178	.175	-5	-5C	--
			.250		.161	-6	--	-6C
.164-32UNJC	.050	.040	.350	.188	.215	-7	-7C	--
			.280		.200	-8	--	-8C
.190-24UNJC/32UNJF	.050	.040	.350	.188	.240	-13	-13C	-
						-9	-9C	-
.250-20UNJC/28UNJF	.060	.050	.450	.250	.313	-14	-14C	-
						-10	-10C	-
.3125-18UNJC/24UNJF	.080	.063	.490	.312	.386	-15	-15C	-
						-11	-11C	-
.375-16UNJC/24UNJF	.125	.094	.560	.375	.448	-16	-16C	-
						-12	-12C	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 509
NUT, PLAIN, CLINCH (ROUND)
APPLICABLE DOCUMENT: MIL-N-45938/1, MIL-N-45938/10

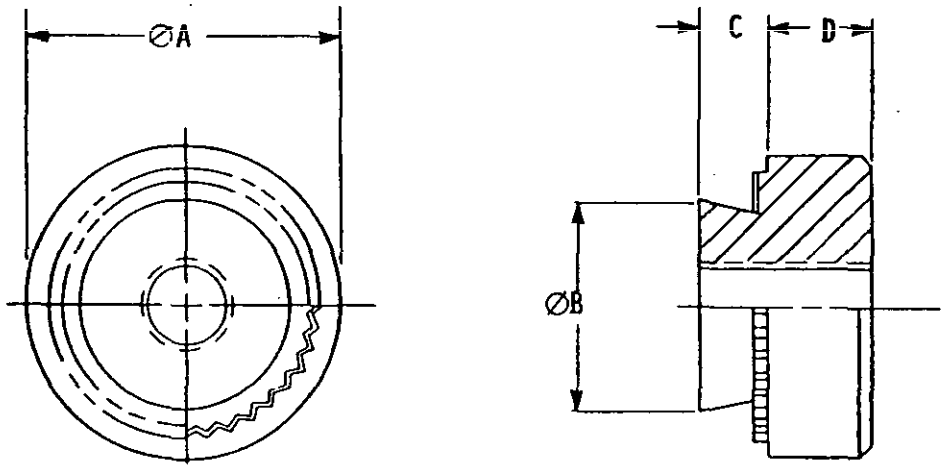


TABLE I

Material					Al Alloy	Carbon Steel	CRES	Carbon Steel
Protective Finish					Plain	Cadmium Plate	Passivate	Cadmium Plate
Rockwell Hardness					--	C-35	--	--
Thread (-28)	ØA Nom	ØB Max	C Max	D Nom	M45938/1 + Dash Number			M45938/10 + Dash Number
.086-56UNC	.250	.165	.030	.062	-1A	-1	-1C	--
			.038		-2A	-2	-2C	--
.112-40UNC			.030		--	-3	-3C	--
			.038		--	-4	-4C	--
			.054		--	-5	-5C	--
		.187	.038	.094	-6A	--	--	--
			.054		-7A	--	--	--
.138-32UNC	.281		.038	.062	--	-8	-8C	--
			.054		--	-9	-9C	--
		.212	.038	.094	-10A	--	--	--
			.054		-11A	--	--	--
.164-32UNC	.312		.038		--	-12	-12C	--
			.054		--	-13	-13C	--
		.233	.038	.125	-14A	--	--	--
			.054		-15A	--	--	--
.190-32UNF	.344	.249	.054	.094	--	-16	-16C	--
			.087		--	-17	-17C	--
	.375	.295	.054	.156	-18A	--	--	
.250-20UNC	.438	.343	.054	.172	-27A	-27	-27C	--
			.087		-28A	-28	-28C	--
			.120		-29A	-29	-29C	--
	.500		.058	.189	--	--	--	-1
.250-28UNF	.438	.343	.087	.172	-19A	-19	-19C	--
			.120		-20A	-20	-20C	--
.3125-18UNC	.575	.412	.058	.240	--	--	--	-2
.3125-24UNF	.500	.411	.087	.234	-21A	-21	-21C	--
			.120		-22A	-22	-22C	--
.375-16UNC	.650	.499	.058	.300	--	--	--	-3
.375-24UNF	.562	.498	.120	.266	-23A	-23	-23C	--
			.235		-24A	-24	-24C	--
			.120		-25A	-25	-25C	--
.500-20UNF	.812	.654	.235	.359	-26A	-26	-26C	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 601

NUT, PLAIN, CONE SEAT, HEXAGON

APPLICABLE DOCUMENT: MS51984

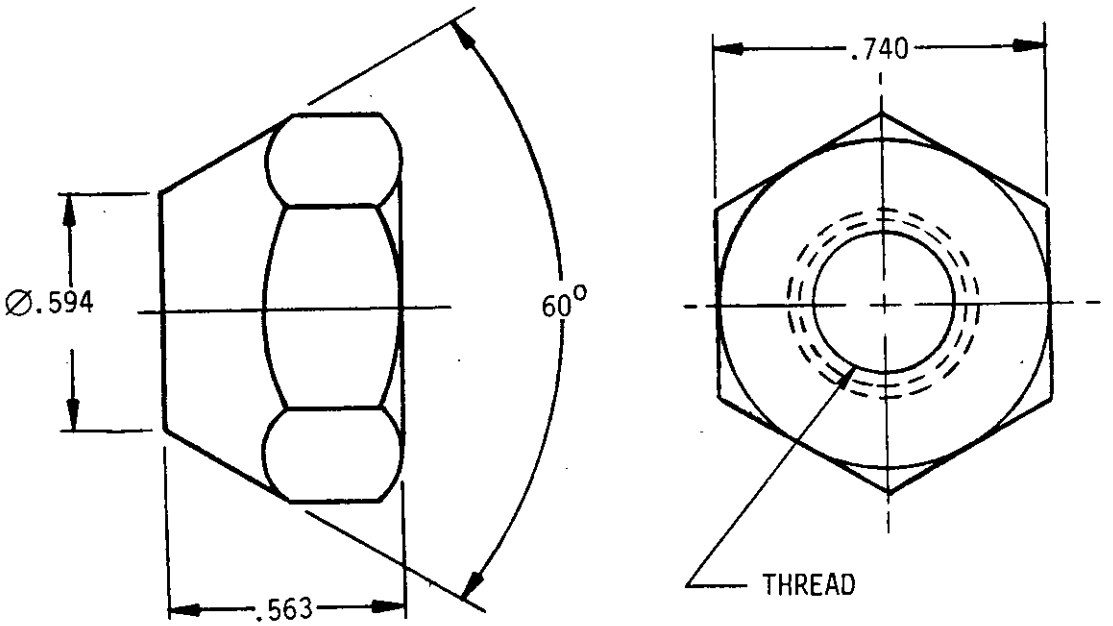


TABLE I

Material	Protective finish	Rockwell hardness
Carbon steel	Zinc plate	15-N, 89-92

TABLE II


Thread .500-20UNF-3B	MS51984 +Dash no.
Left hand thread	-1
Right hand thread	-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 701

NUT, PLAIN, HEXAGON

APPLICABLE DOCUMENTS: MS16203, MS51967 thru MS51972, MS9356, MS9357, MS9360, MS9881, MS9882

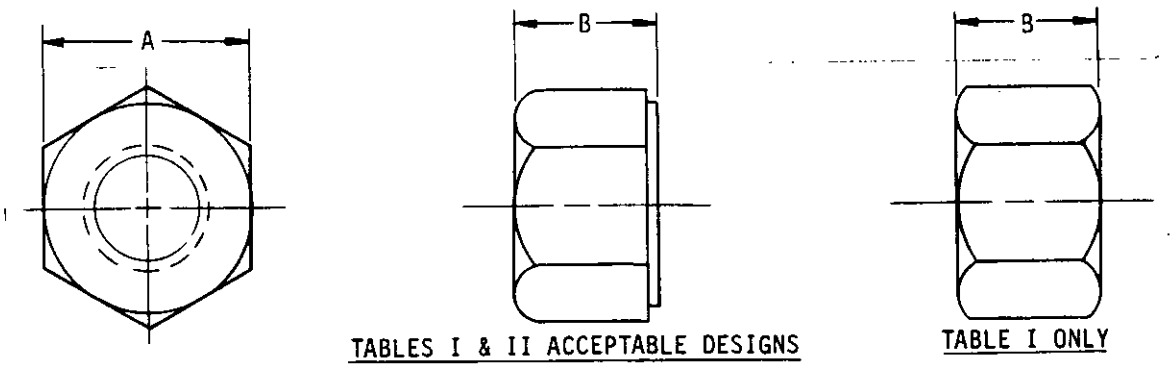

TABLES I & II ACCEPTABLE DESIGNS

TABLE I ONLY

TABLE I

Material				Brass		Carbon steel				CRES		Cu-Si	Aluminum	Phos-bronze
Protective finish				Black chemical		Cadmium plate				Passivate		--	Anodize	--
Carbon steel grade				--	--	Grade B	Grade C	Grade B	Grade C	--	--	--	--	--
Thread		A Nom	B Nom	MS51969 +Dash no.	MS51970 +Dash no.	MS51968 +Dash no.		MS51967 +Dash no.		MS51971 +Dash no.	MS51972 +Dash no.	MS16203 + DASH NO.		
.250	20UNC-2B	.438	.219	-1	--	-2	-3	--	--	-1	--	-25	-49	-63
	28UNF-2B			--	-1	--	--	-2	-3	--	-1	--	--	--
.3125	18UNC-2B	.500	.266	-2	--	-5	-6	--	--	-2	--	-26	-50	-64
	24UNF-2B			--	-2	--	--	-5	-6	--	-2	--	--	--
.375	16UNC-2B	.562	.328	-3	--	-8	-9	--	--	-3	--	-27	-51	-65
	24UNF-2B			--	-3	--	--	-8	-9	--	-3	--	--	--
.4375	14UNC-2B	.688	.375	-4	--	-11	-12	--	--	-4	--	-28	-52	-66
	20UNF-2B			--	-4	--	--	-11	-12	--	-4	--	--	--
.500	13UNC-2B	.750	.438	-5	--	-14	-15	--	--	-5	--	-29	-53	-67
	20UNF-2B			--	-5	--	--	-14	-15	--	-5	--	--	--
.625	11UNC-2B	.938	.549	-7	--	-20	-21	--	--	-7	--	-30	-54	-68
	18UNF-2B			--	-7	--	--	-20	-21	--	-7	--	--	--
.750	10UNC-2B	1.125	.641	-8	--	-23	-24	--	--	-8	--	-31	-55	-69
	16UNF-2B			--	-8	--	--	-23	-24	--	-8	--	--	--
.875	9UNC-2B	1.312	.750	-9	--	-26	-27	--	--	-9	--	-32	--	-70
	14UNF-2B			--	-9	--	--	-26	-27	--	-9	--	--	--
1.000	8UNC-2B	1.500	.859	-10	--	-29	-30	--	--	-10	--	-33	--	-71
	12UNF-2B			--	-10	--	--	-29	-30	--	-10	--	--	--
1.125	7UNC-2B	1.688	.969	-11	--	-32	-33	--	--	-11	--	-34	--	-72
	12UNF-2B			--	-11	--	--	-32	-33	--	-11	--	--	--
1.250	7UNC-2B	1.875	1.063	-12	--	-35	-36	--	--	-12	--	-35	--	-73
	12UNF-2B			--	-12	--	--	-35	-36	--	-12	--	--	--
1.375	6UNC-2B	2.062	1.172	-13	--	-38	-39	--	--	-13	--	-36	--	-74
	12UNF-2B			--	-13	--	--	-38	-39	--	-13	--	--	--
1.500	6UNC-2B	2.250	1.281	-14	--	-41	-42	--	--	-14	--	--	--	--
	12UNF-2B			--	-14	--	--	-41	-42	--	-14	--	--	--
1.750	5UNC-2B	2.625	1.500	-15	--	-44	-45	--	--	-15	--	--	--	--
2.000	4½UNC-2B	3.000	1.719	-16	--	-47	-48	--	--	-16	--	--	--	--
2.250	4½UNC-2B	3.375	1.922	-17	--	-50	-51	--	--	-17	--	--	--	--
2.500	4UNC-2B	3.750	2.140	-18	--	-53	-54	--	--	-18	--	--	--	--
2.750	4UNC-2B	4.125	2.359	-19	--	-56	-57	--	--	-19	--	--	--	--
3.000	4UNC-2B	4.500	2.578	-20	--	-59	-60	--	--	-20	--	--	--	--

TABLE II

Material			Corrosion and heat resistant steel			AMS-6322 (RC26-32)	
Protective finish			--	Silver plate		Cadmium plate	
Thread (UNJF-3B)	A Nom	B Nom	MS9356 +Dash no.	MS9357 +Dash no.	MS9360 +Dash no. (Drilled hex)	MS9881 +Dash no.	MS9882 +Dash no. (Drilled hex)
.112-48	.251	--	-04	-04	-04	-04	-04
.138-40	.313	.136	-06	-05	-06	-06	-06
.164-36	.345	--	-08	-08	-08	-08	-08
.190-32	.376	.156	-09	-09	-09	-09	-09
.250-28	.439	.219	-10	-10	-10	-10	-10
.3125-24	.502	.266	-11	-11	-11	-11	-11
.375-24	.564	.328	-12	-12	-12	-12	-12
.4375-20	.690	.375	-13	-13	-13	-13	-13
.500-20	.752	.438	-14	-14	-14	-14	-14
.625-18	.940	.547	-16	--	-16	-16	-16
.750-16	1.064	.656	-17	-17	-17	-17	-17
.875-14	1.252	.766	-18	-18	-18	-18	-18
1.000-12	1.440	.875	-19	-19	-19	-19	-19

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 702

NUT, PLAIN, HEXAGON, AIRFRAME

APPLICABLE DOCUMENT: AN315

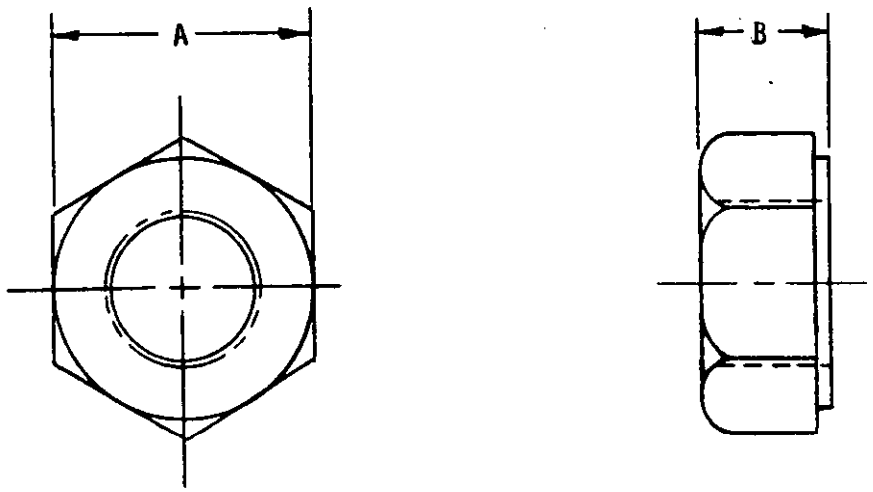


TABLE I

Material ----------			CRES	Steel	Aluminum Alloy
Protective Finish ----------			Passivate	Cadmium Plate	Anodize
Thread	A nom	B nom	AN315 + Dash No. -1/		
.138-40UNF-3B .190-32UNF-3B .250-28UNF-3B	.312 .375 .488	.109 .141 .188	-C640 -C3 -C4	-640 -3 -4	-D640 -D3 -D4
.3125-24UNF-3B .375-24UNF-3B .4375-20UNF-3B	.500 .562 .625	.234 .281 .328	-C5 -C6 -C7	-5 -6 -7	-D5 -D6 -D7
.500-20UNF-3B .5625-18UNF-3B .625-18UNF-3B .750-16UNF-3B	.750 .875 1.000 1.125	.375 .422 .469 .625	-C8 -C9 -C10 -C12	-8 -9 -10 -12	-D8 -D9 -D10 -D12
.875-14UNF-3B 1.000-12UNF-3B 1.125-12UNF-3B 1.250-12UNF-3B	1.312 1.500 1.688 1.875	.656 .750 .813 .875	-C14 -C15 -C18 -C20	-14 -15 -18 -20	-D14 -D15 -D18 -D20

1/ Add "R' after dash number for right-hand thread and "L" for left-hand thread.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 703
NUT, PLAIN, HEXAGON, BOSS CONNECTION

APPLICABLE DOCUMENTS: MS9200, MS9201

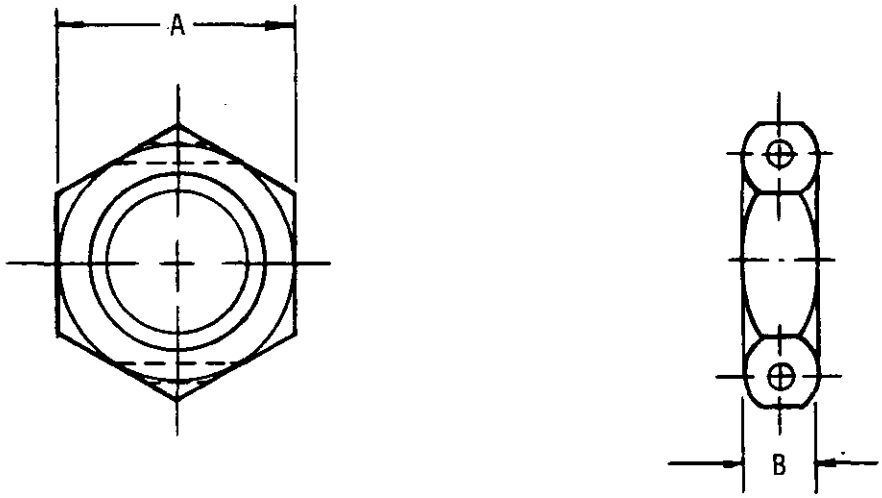


TABLE I

Material				Aluminum	CRES
Protective finish				Anodize	Silver plate
Thread	Tube OD Nom	A Nom	B Nom	MS9200 + Dash no.	MS9201 + Dash no.
.3125-24UNJF-3B	.125	.562	.219	-02	-02
.375-24UNJF-3B	.188	.625	.219	-03	-03
.4375-20UNJF-3B	.250	.688	.250	-04	-04
.500-20UNJF-3B	.312	.750	.250	-05	-05
.625-18UNJF-3B	.438	.875	.266	-07	-07
.750-16UNJF-3B	.500	1.000	.312	-08	-08
.875-14UNJF-3B	.625	1.125	.359	-10	-10
1.000-12UNJF-3B	.688	1.312	.406	-11	-11
1.1875-12UNJ-3B	.875	1.500	.406	-14	-14
1.3125-12UNJ-3B	1.000	1.625	.406	-16	-16
1.500-12UNJF-3B	1.125	1.812	.406	-18	-18
1.625-12UNJ-3B	1.250	1.938	.406	-20	-20
1.875-12UNJ-3B	1.500	2.188	.406	-24	-24
2.250-12UNJ-3B	1.750	2.562	.406	-28	-28
2.500-12UNJ-3B	2.000	2.812	.406	-32	-32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 704

NUT, PLAIN, HEXAGON, CHECK

APPLICABLE DOCUMENTS: MS9361, MS9362
AN150401 THRU AN150425

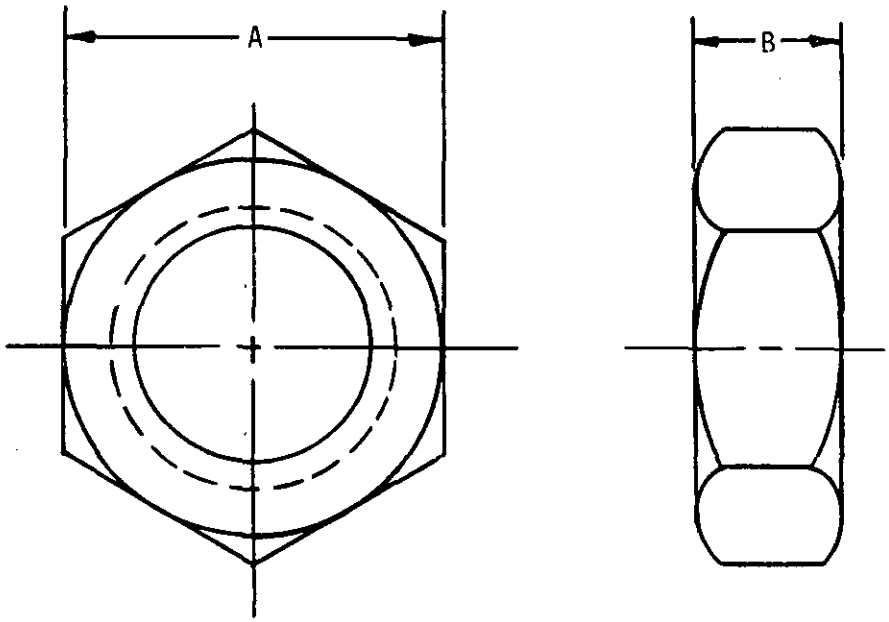


TABLE I

Material ----------			Corrosion & Heat Resistant Steel		Alloy Steel
Protective finish ----------			--	Silver plate	Cadmium Plate
Thread (UNJF-3B)	A Nom	B Nom	MS9361 + Dash no.	MS9362 + Dash no.	Part No.
.164-36	.344	.109	-08	-08	---
.190-32	.375	.125	-09	-09	AN150407
.250-28	.438	.125	-10	-10	AN150408
.3125-24	.500	.156	-11	-11	AN150409
.375-24	.562	.188	-12	-12	AN150410
.4375-20	.688	.219	-13	-13	AN150411
.500-20	.750	.250	-14	-14	AN150412
.625-18	.938	.312	-16	-16	AN150414
.750-16	1.062	.375	-17	-17	AN150415
.875-14	1.250	.438	-18	-18	---
1.000-12	1.438	.500	-19	-19	---

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 705
NUT, PLAIN, HEXAGON, CONNECTOR MOUNTING
APPLICABLE DOCUMENT: MS3186

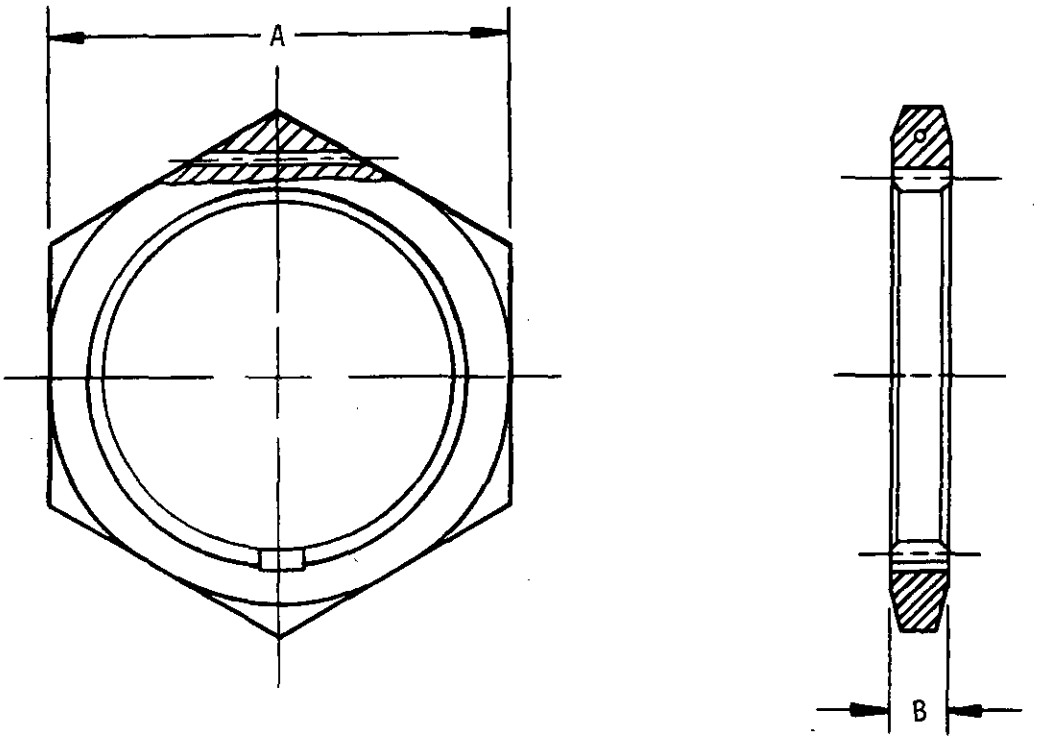


TABLE I.

Material ----------			Aluminum	Steel	CRES	For connector shell size	
Color ----------			Olive Drab		Black		
Protective finish ----------			Cadmium Plate				
Thread	A Nom	B Nom	MS3186 + Dash no.			MIL-C-5015	MIL-C-26482
.500-28UNEF-2B	.687	.125	-25	-26	-27	8S	--
.625-24UNEF-2B	.812	.125	-31	-32	-33	10S, 10SL	--
.750-20UNEF-2B	.937	.125	-37	-38	-39	12S, 12	--
.875-20UNEF-2B	1.062	.125	-40	-41	-42	14S, 14	12
1.000-20UNEF-2B	1.188	.125	-43	-44	-45	16S, 16	14
1.125-18UNEF-2B	1.312	.125	-46	-47	-48	18	16
1.250-18UNEF-2B	1.438	.125	-49	-50	-51	20	18
1.375-18UNEF-2B	1.562	.125	-52	-53	-54	22	20
1.500-18UNEF-2B	1.688	.125	-55	-56	-57	24	22
1.625-18UNEF-2B	1.812	.125	-58	-59	-60	--	24

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 706
NUT, PLAIN, HEXAGON, ELECTRICAL THIN

APPLICABLE DOCUMENTS: MS25082

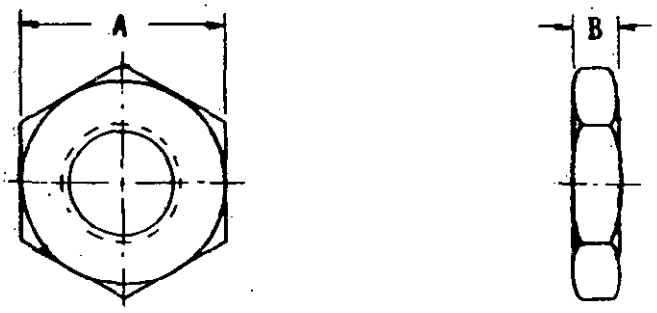


TABLE I

Material ----------		Steel	CRES	BRASS	BRASS
Protective Finish ----------		Cadmium	Passivate	Black Ozide	Silver Plate
Thread	A / B	MS 25082 + Dash No.			
.138 32UNC-2B	.309 .078	-1	-C1	-B1	-S1
.164 32UNC-2B	.340 .078	-2	-C2	-B2	-S2
.190 32UNF-2B	.372 .078	-3	-C3	-B3	-S3
	.247	-12	-C12	-B12	-S12
.250 28UNF-2B	.434 .089	-4	-C4	-B4	-S4
32UNEF-2B	.309 .078	-13	-C13	-B13	-S13
40UNS-2B	.063	-14	-C14	-B14	-S14
.3125 24UNF-2B	.558 .104	-5	-C5	-B5	-S5
.375 24UNF-2B	.616 .104	-6	-C6	-B6	-S6
32UNEF-2B	.558 .078	-7	-C7	-B7	-S7
	.093	-20	-C20	-B20	-S20
.4375 32NS-2B	.500 .093	-18	-C18	-B18	-S18
.4687 32NS-2B	.558 .078	-8	-C8	-B8	-S8
	.093	-21	-C21	-B21	-S21
.500 28UNEF-2B	.624 .109	-19	-C19	-B19	-S19
32UN-2B	.558 .078	-15	-C15	-B15	-S15
	.093	-22	-C22	-B22	-S22
18UNF-2B	.818 .139	-10	-C10	-B10	-S10
.625 24UNEF-2B	.752 .104	-11	-C11	-B11	-S11
.6875 27NS-2B	.812 .093	-16	-C16	-B16	-S16
1.000 27UNS-2B	1.124 .093	-17	-C17	-B17	-S17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE I

Material				CRES			STEEL					ALLOY STEEL	BRASS	COPPER-SILICON ALLOY	AL-ALLOY	PHOSPHOR-BRONZE
Protective finish				Passivate			Cadmium plate	Cadmium plate	Phosphate	Cadmium plate	Zinc coat	Cadmium Plate	Black Oxide		Anodize	
Carbon steel grade				— —			— —	Grade B		Grade C	— —	4130/4340, Rc34-38	— —		— —	
Thread		A Nom	B Nom	AN316 +Dash no.	MAS1423 +Dash no.	MS35691 +Dash no.	AN316 +Dash no.	MS35691 +Dash no.			MS27952 1/ + Dash no.	MAS1423 + Dash no.	MS35691 +Dash no.	MS16203 + Dash no.		
.138	32UNJC-3B	.312	.100	—	C06	—	—	—	—	—	—	-06	—	—	—	—
.164	32UNJC-3B	.344	.112	—	C08	—	—	—	—	—	—	-08	—	—	—	—
.190	32UNJF-3B	.375	.125	—	C3	—	—	—	—	—	—	-3	—	—	—	—
.250	28UNJF-3B	.438	.125	--	C4	--	--	--	--	--	--	-4	--	--	--	--
	28UNF-3B		.125	C4	--	--	-4	--	--	--	--		--	--	--	--
	28UNF-2B		.156	--	--	-7	--	-5	-426	-6	-30		--	--	--	--
	20UNC-2B		.156	--	--	-3	--	-1	-406	-2	-1		-4	-37	-56	-75
.3125	24UNJF-3B	.500	.125	--	C5	--	--	--	--	--	--	-5	--	--	--	--
	24UNF-3B		.156	C5	--	--	-5	--	--	--	--		--	--	--	--
	24UNF-2B		.188	--	--	-15	--	-13	-526	-14	-31		-16	--	--	--
	18UNC-2B		.188	--	--	-11	--	-9	-506	-10	-3		-12	-38	-57	-76
.375	24UNJF-3B	.562	.125	--	C6	--	--	--	--	--	--	-6	--	--	--	--
	24UNF-3B		.188	C6	--	--	-6	--	--	--	--		--	--	--	--
	24UNF-2B		.219	--	--	-23	--	-24	-626	-22	-32		-24	--	--	--
	16UNC-2B		.219	--	--	-19	--	-17	-606	-18	-5		-20	-39	-58	-77
.4375	20UNJF-3B	.625	.156	--	C7	--	--	--	--	--	--	-7	--	--	--	--
	20UNF-3B	.625	.219	C7	--	--	-7	--	--	--	--		--	--	--	--
	20UNF-2B	.625	.250	--	--	--	--	--	--	--	-33		--	--	--	--
	20UNF-2A	.688	.250	--	--	-31	--	-29	-726	-30	--		-32	--	--	--
	14UNC-2B	.688	.250	--	--	-27	--	-25	-706	-26	--		-28	-40	-59	-78
.500	20UNJF-3B	.750	.156	--	C8	--	--	--	--	--	--	-8	--	--	--	--
	20UNF-3B		.250	C8	--	--	-8	--	--	--	--		--	--	--	--
	20UNF-2B		.313	--	--	-39	--	-37	-826	-38	-34		-40	--	--	--
	13UNC-2B		.313	--	--	-35	--	-33	-806	-34	-7		-36	-41	-60	-79
.625	18UNJF-3B	1.000	.203	--	C10	--	--	--	--	--	--	-10	--	--	--	--
	18UNF-3B	1.000	.312	C10	--	--	-10	--	--	--	--		--	--	--	--
	18UNF-2B	.938	.375	--	--	-55	--	-53	-1026	-54	-35		-56	--	--	--
	11UNC-2B	.938	.375	--	--	-51	--	-49	-1006	-50	-9		-52	-42	-61	-80
.750	16UNJF-3B	1.125	.250	--	C12	--	--	--	--	--	--	-12	--	--	--	--
	16UNF-3B		.375	C12	--	--	-12	--	--	--	--		--	--	--	--
	16UNF-2B		.422	--	--	-63	--	-61	-1226	-62	--		-64	--	--	--
	10UNC-2B		.422	--	--	-59	--	-57	-1206	-58	-11		-60	-43	-62	-81
.875	14UNJF-3B	1.312	.250	--	C14	--	--	--	--	--	--	-14	--	--	--	--
	14UNF-3B		.438	C14	--	--	-14	--	--	--	--		--	--	--	--
	14UNF-2B		.484	--	--	-71	--	-69	--	-70	--		-72	--	--	--
	9UNC-2B		.484	--	--	-67	--	-65	--	-66	-13		-68	-44	--	-82
1.000	12UNJF-3B	1.500	.250	--	C16	--	--	--	--	--	--	-16	--	--	--	--
	12UNF-3B		.500	C16	--	--	-16	--	--	--	--		--	--	--	--
	12UNF-2B		.547	--	--	-79	--	-77	--	-78	-36		-80	--	--	--
	8UNC-2B		.547	--	--	-75	--	-73	--	-74	-15		-76	-45	--	-83
1.125	12UNJF-3B	1.688	.265	--	C18	--	--	--	--	--	--	-18	--	--	--	--
	12UNF-2B	1.688	.609	--	--	-87	--	-85	--	-86	--		-88	--	--	--
	7UNC-2B	1.688	.609	--	--	-83	--	-81	--	-82	-17		-84	-46	--	-84
1.250	12UNJF-3B	1.875	.281	--	C20	--	--	--	--	--	--	-20	--	--	--	--
	12UNF-2B	1.875	.719	--	--	-95	--	-93	--	-94	-37		-96	--	--	--
	7UNC-2B	1.875	.719	--	--	-91	--	-89	--	-90	-19		-92	-47	--	-85
1.375	12UNJF-3B	2.062	.312	--	C22	--	--	--	--	--	--	-22	--	--	--	--
	12UNF-2B	2.062	.781	--	--	-103	--	-101	--	-102	--		-104	--	--	--
	6UNC-2B	2.062	.781	--	--	-99	--	-97	--	-98	--		-100	--	--	--
1.500	12UNJF-3B	2.250	.312	--	C24	--	--	--	--	--	--	-24	--	--	--	--
	12UNF-2B	2.250	.844	--	--	-111	--	-109	--	-110	--		-112	--	--	--
	6UNC-2B	2.250	.844	--	--	-107	--	-105	--	-106	-21		-108	-48	--	-86
1.625	12UNJF-3B	2.125	.312	--	C26	--	--	--	--	--	--	-26	--	--	--	--
1.750	12UNJF-3B	2.250	.358	--	C28	--	--	--	--	--	--	-28	--	--	--	--
	5UNC-2B	2.625	.969	--	--	-115	--	-113	--	-114	-23		-116	--	--	--
1.875	12UNJF-3B	2.375	.358	--	C30	--	--	--	--	--	--	-30	--	--	--	--
2.000	12UNJF-3B	2.625	.375	--	C32	--	--	--	--	--	--	-32	--	--	--	--
	4½UNC-2B	3.000	1.094	--	--	-119	--	-117	--	-118	-25		-120	--	--	--
2.125	12UNJF-3B	2.750	.406	--	C34	--	--	--	--	--	--	-34	--	--	--	--
2.250	12UNJF-3B	2.875	.406	--	C36	--	--	--	--	--	--	-36	--	--	--	--
	4½UNC-2B	3.375	1.203	--	--	-123	--	-121	--	-122	--		-124	--	--	--
2.500	12UNJF-3B	3.125	.406	--	C40	--	--	--	--	--	--	-40	--	--	--	--
2.500	4UNC-2B	3.750	1.453	--	--	-127	--	-125	--	-126	-27	--	-128	--	--	--
2.750	4UNC-2B	4.125	1.578	--	--	-131	--	-129	--	-130	--	--	-132	--	--	--
3.000	4UNC-2B	4.500	1.703	--	--	-135	--	-133	--	-134	--	--	-136	--	--	--

1/ All threads under this standard are left-handed.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 708

NUT, PLAIN, HEXAGON, MACHINE SCREW

APPLICABLE DOCUMENTS: MS35649, MS35650

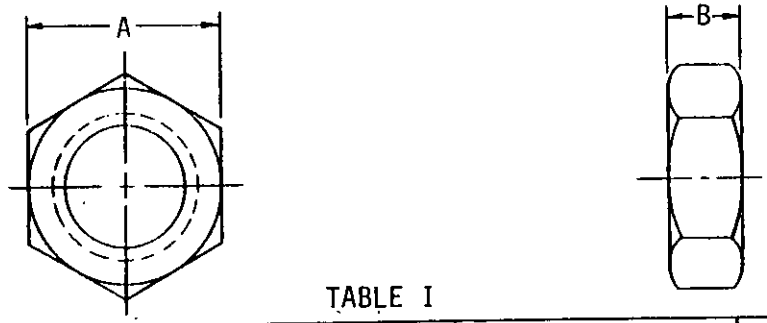


TABLE I

Material ----------				CARBON STEEL				CRES		BRASS		COPPER SILICON ALLOY
Protective finish.-------				Cadmium plate		Phosphate coating		Passivate 1/		Black oxide 2/		--
Threads (-2B)		A Max	B Nom	MS35649 + Dash no.	MS35650 + Dash no.	MS35649 + Dash no.	MS35650 + Dash no.	MS35649 + Dash no.	MS35650 + Dash no.	MS35649 + Dash no.	MS35650 + Dash no.	MS35649 + Dash no.
.060	80UNF	.156	.047	--	-312	--	-13	--	-314	--	-315	--
.086	64UNF	.188	.063	--	-322	--	-23	--	-324	--	-325	--
	56UNC			-222	--	-23	--	-224	--	-225	--	-226
.112	48UNF	.250	.094	--	-342	--	-43	--	-344	--	-345	--
	40UNC			-242	--	-43	--	-244	--	-245	--	-246
.138	40UNF	.312	.109	--	-362	--	-63	--	-364	--	-365	--
	32UNC			-262	--	-63	--	-264	--	-265	--	-266
.164	36UNF	.344	.125	--	-382	--	-83	--	-384	--	-386	--
	32UNC			-282	--	-83	--	-284	--	-286	--	-287
.190	32UNF	.375	.125	--	-302	--	-103	--	-304	--	-305	--
	24UNC			-202	--	-103	--	-204	--	-205	--	-206
.250	28UNF	.438	.188	--	-3252	--	--	--	-3254	--	-3255	--
	20UNC			-2252	--	--	--	-2254	--	-2255	--	-2256
.3125	24UNF	.562	.219	--	-3312	--	--	--	-3314	--	-3315	--
	18UNC			-2312	--	--	--	-2314	--	-2315	--	-2316
.375	24UNF	.625	.250	--	-3382	--	--	--	-3384	--	-3385	--
	16UNC			-2382	--	--	--	-2384	--	-2385	--	-2386
.500	20UNF	.813	.438	--	-3392	--	--	--	-3394	--	-3395	--
.625	18UNF	1.000	.531	--	-3402	--	--	--	-3404	--	-3405	--


1/ If black oxide is required, add "B" after dash number.
2/ If tin plating is required, add "T" after dash number; if silver plating is required, add "S" after dash number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 709

NUT, PLAIN, HEXAGON, PLASTIC (NYLON)

APPLICABLE DOCUMENT: MS51858

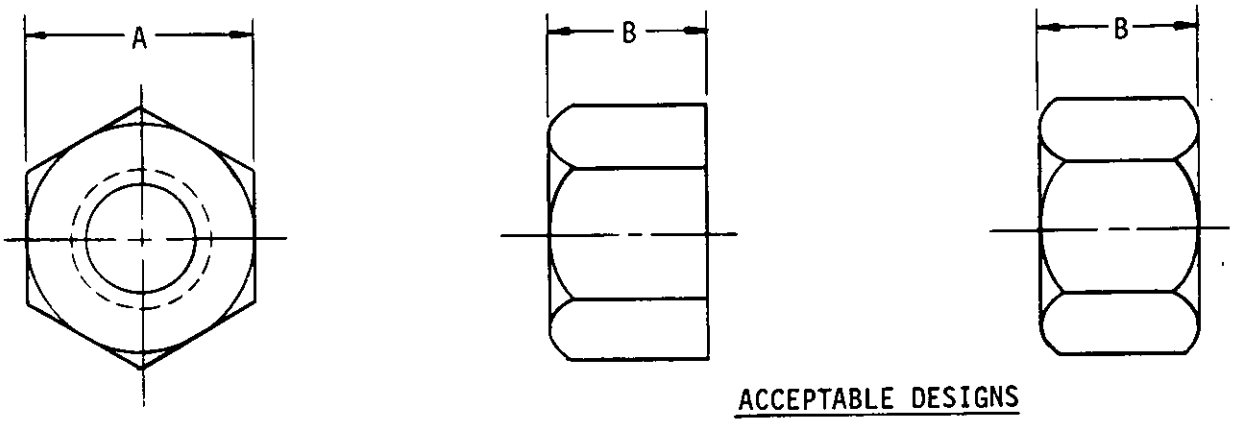

ACCEPTABLE DESIGNS

TABLE I

Material ----------			Nylon
Thread	A Nom	B Nom	MS51858 +Dash no.
.086-56UNC-2B	.188	.063	-1
.112-40UNC-2B	.250	.094	-2
.138-32UNC-2B	.312	.109	-3
.164-32UNC-2B	.344	.125	-4
.190-24UNC-2B	.375	.125	-5
.190-32UNF-2B			-6
.250-20UNC-2B	.438	.219	-7
.250-28UNF-2B			-8
.3125-18UNC-2B	.500	.266	-9
.375-16UNC-2B	.562	.328	-10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 710
NUT, PLAIN, HEXAGON, SMALL PATTERN

APPLICABLE DOCUMENT: NAS 671



TABLE I

Material			Steel	CRES	Brass
Protective Finish			Cadmium Plate	Passivate	Cadmium Plate
Thread	A Max	B Max	NAS 671 + Dash No.		
.0600-80 UNJF-3B	.125	.050	-0	-C0	-B0
.0730-64 UNJC-3B	.125	.050	-1	-C1	-B1
.0860-56 UNJC-3B	.156	.066	-2	-C2	-B2
.0990-48 UNJC-3B	.156	.066	-3	-C3	-B3
.1120-40 UNJC-3B	.188	.066	-4	-C4	-B4
.1380-32 UNJC-3B	.250	.098	-6	-C6	-B6
.1640-32 UNJC-3B	.313	.114	-8	-C8	-B8
.1900-32 UNJF-3B	.344	.130	-10	-C10	-B10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 711

NUT, PLAIN, HEXAGON, ZINC COAT

APPLICABLE DOCUMENTS: MS51469, MS51470, MS51471, MS51472
MS51473

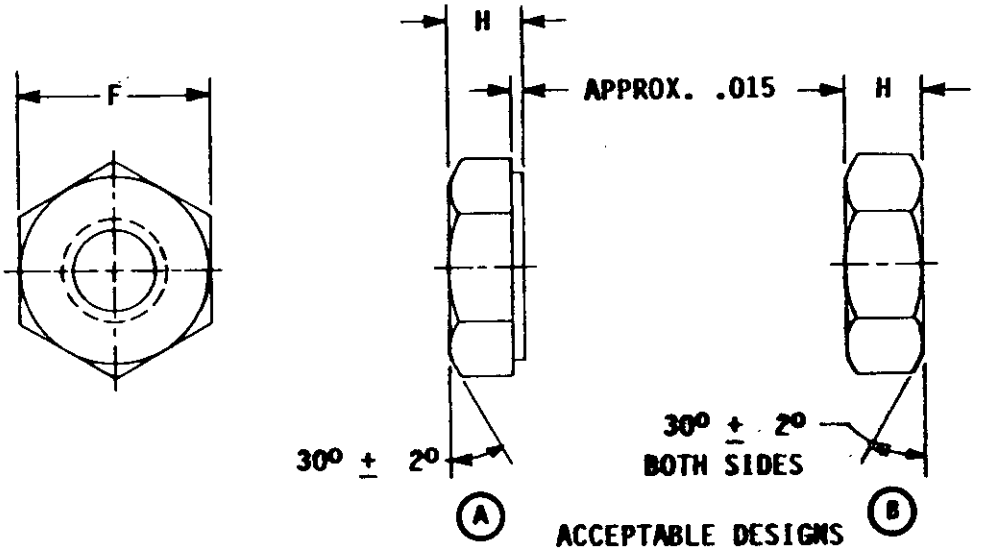


TABLE I

Material					Steel, Carbon
Protective Finish					Zinc Coat
Document	Thread (-2B)	F Max	H Nom	Design	Dash No.
MS51469	.086-56 UNC	.187	.062	B	-01
	.138-32 UNC	.312	.109		-02
	.164-32 UNC	.343	.125		-03
MS51470	.112-48 UNF	.250	.094	B	-01
	.138-40 UNF	.312	.109		-02
	.190-32 UNF	.375	.125		-03
MS51471	.500-13 UNC	.750	.312	A or B	-01
MS51472	.500-13 UNC	.750	.438	A or B	-01
	1.000-8 UNC	1.500	.859		-02
MS51473	.250-28 UNF	.4375	.219	A or B	-01
	.3125-24 UNF	.5000	.266		-02
	.4375-20 UNF	.6875	.375		-03
	.500-20 UNF	.7500	.438		-04
	.5625-18 UNF	.8750	.484		-05
	.750-16 UNF	1.1250	.641		-06
	.875-14 UNF	1.3125	.750		-07

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 801
NUT, PLAIN, KNURLED (ROUND)
APPLICABLE DOCUMENT: MS16994

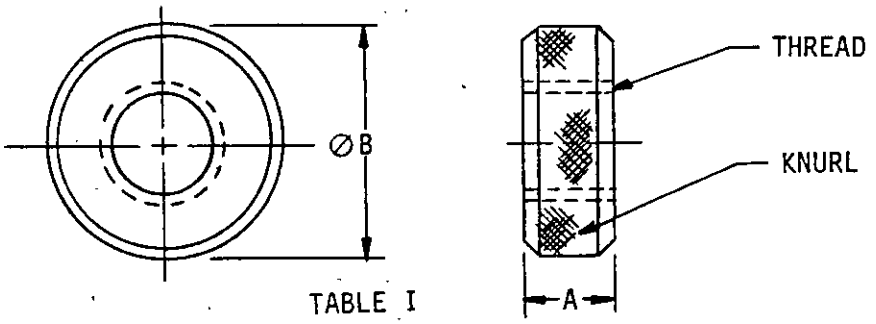


TABLE I


Material ----------		Brass (1/2 Hard)	CRES (300)	Carbon Steel	Aluminum alloy (T-4)
Protective finish ----------		Black chemical	Passivate	Cadmium plate	Anodize
Thread	A Nom / ⌀B Nom	MS16994 +Dash no.			
.112 40UNC-2B	.09 / .88	-2B	-2C	-2S	-2A
	.25 / .38	-5B	-5C	-5S	-5A
	.50 / .38	-6B	-6C	-6S	-6A
.138 32UNC-2B	.19 / .50	-10B	-10C	-10S	-10A
	.25 / .38	-12B	-12C	-12S	-12A
	.34 / .50	-15B	-15C	-15S	-15A
	.94 / .88	-17B	-17C	-17S	-17A
.164 32UNC-2B	.19 / .50	-19B	-19C	-19S	-19A
	.25 / .75	-21B	-21C	-21S	-21A
	.28 / .50	-22B	-22C	-22S	-22A
	.38 / .68	-25B	-25C	-25S	-25A
	.47 / .38	-27B	-27C	-27S	-27A
	.50 / .50	-28B	-28C	-28S	-28A
	.62 / .75	-30B	-30C	-30S	-30A
.190 32UNF-2B	.25 / 1.00	-33B	-33C	-33S	-33A
	.31 / .50	-35B	-35C	-35S	-35A
	.33 / .52	-36B	-36C	-36S	-36A
	.50 / .50	-40B	-40C	-40S	-40A
	.56 / .76	-41B	-41C	-41S	-41A
.190 24UNC-2B	.23 / .50	-43B	-43C	-43S	-43A
	.25 / .75	-44B	-44C	-44S	-44A
	.44 / .75	-48B	-48C	-48S	-48A
	.69 / 1.00	-49B	-49C	-49S	-49A
.250 20UNC-2B	.12 / .88	-50B	-50C	-50S	-50A
	.38 / 1.00	-52B	-52C	-52S	-52A
	.50 / .50	-54B	-54C	-54S	-54A
	.55 / 1.25	-55B	-55C	-55S	-55A
.250 28UNF-2B	.19 / .62	-58B	-58C	-58S	-58A
	.25 / .75	-59B	-59C	-59S	-59A
	.50 / .75	-61B	-61C	-61S	-61A
	.56 / 1.50	-62B	-62C	-62S	-62A
	.65 / .88	-63B	-63C	-63S	-63A
.3125 18UNC-2B	.25 / .88	-66B	-66C	-66S	-66A
	.38 / 1.25	-67B	-67C	-67S	-67A
	.56 / .88	-69B	-69C	-69S	-69A
.3125 24UNF-2B	.25 / .88	-71B	-71C	-71S	-71A
	.31 / 1.00	-72B	-72C	-72S	-72A
	.50 / .75	-75B	-75C	-75S	-75A
	.94 / 1.25	-77B	-77C	-77S	-77A
.375 16UNC-2B	.50 / 1.25	--	-122C	--	--
.375 32UNEF-2B	.12 / .50	-79B	-79C	-79S	-79A
	.16 / .94	-81B	-81C	-81S	-81A
	.25 / .69	-83B	-83C	-83S	-83A
	.31 / 1.00	-84B	-84C	-84S	-84A
	.75 / .75	-86B	-86C	-86S	-86A
.375 24UNF-2B	.12 / .69	-89B	-89C	-89S	-89A
	.25 / 1.25	-92B	-92C	-92S	-92A
	.50 / .75	-94B	-94C	-94S	-94A
.500 20UNF-2B	.12 / 1.12	-105B	-105C	-105S	-105A
	.25 / .75	-107B	-107C	-107S	-107A
	.38 / 1.00	-108B	-108C	-108S	-108A
	.47 / 1.50	-110B	-110C	-110S	-110A
	.75 / 1.50	-112B	-112C	-112S	-112A
	.88 / 2.50	-113B	-113C	-113S	-113A
.750 20UNEF-2B	.12 / 1.72	-116B	-116C	-116S	-116A
	.39 / 1.25	-119B	-119C	-119S	-119A
	.44 / 1.88	-120B	-120C	-120S	-120A
	.75 / 1.50	-121B	-121C	-121S	-121A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 901

NUT, PLAIN, ROUND, SPANNER

APPLICABLE DOCUMENTS: MS9951, MS9984, MS27955, MS172321 thru MS172370, AS3163

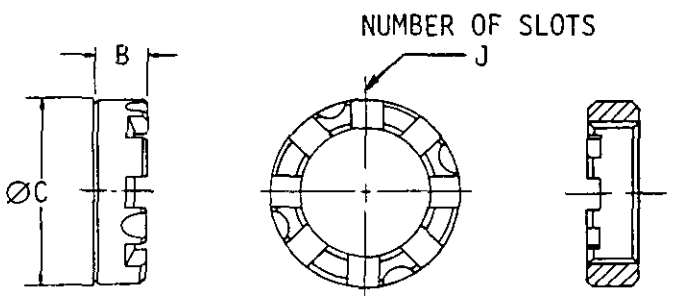

MS9951 AND MS9984

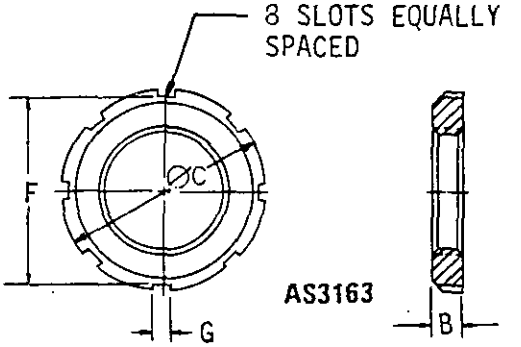


TABLE I MS27955 AND MS172321 THRU MS 172370

Material							CRES	Alloy steel	Steel	
Protective finish							Silver plate	Phosphate coating	None	Phosphate coating
Rockwell hardness							C32-38	C26-32		
Thread		B	ØC	J (slots)	F Nom	G Min	MS9984 + Dash no.	MS27955 + Dash no.	MS9951 + Dash no.	MS172321 thru MS172353 Part no.
.375	32UNJEF-3B	.300	.598	4	--	--	-02	--	-02	--
.4375	28UNJEF-3B	.300	.748	6	--	--	-03	--	-03	--
.500	28UNJEF-3B	.300	.798	6	--	--	-04	--	-04	--
	28UNEF-3B	.188	1.047	8	.922	.120	--	-1	--	MS172321
.625	24UNJEF-3B	.300	.923	6	--	--	-06	--	-06	--
	24NEF-3B	.219	1.172	8	1.047	.120	--	-3	--	MS172323
.750	20UNJEF-3B	.300	1.073	6	--	--	-08	--	-08	--
	20UNEF-3B	.250	1.391	8	1.266	.178	--	-5	--	MS172325
.875	20UNJEF-3B	.300	1.198	8	--	--	-10	--	-10	--
	20UNEF-3B	.250	1.531	8	1.406	.178	--	-7	--	MS172327
1.000	20UNJEF-3B	.300	1.348	8	--	--	-12	--	-12	--
	20UNEF-3B	.281	1.719	8	1.531	.178	--	-9	--	MS172329
1.125	18UNJEF-3B	.325	1.473	8	--	--	-14	--	-14	--
	18NEF-3B	.281	1.875	8	1.688	.178	--	-11	--	MS172331
1.250	18UNJEF-3B	.325	1.623	8	--	--	-16	--	-16	--
	18NEF-3B	.281	2.000	8	1.812	.178	--	-13	--	MS172333
1.375	18UNJEF-3B	.325	1.748	8	--	--	-18	--	-18	--
	18NEF-3B	.281	2.125	8	1.938	.178	--	-15	--	MS172335
1.500	18UNJEF-3B	.325	1.898	10	--	--	-20	--	-20	--
	18NEF-3B	.281	2.250	8	2.062	.240	--	-17	--	MS172337
1.625	16UNJ-3B	.325	2.023	10	--	--	-22	--	-22	--
	16NEF-3B	.312	2.375	8	2.188	.240	--	-18	--	MS172339
1.750	16UNJ-3B	.325	2.173	10	--	--	-24	--	-24	--
	16UN-3B	.312	2.531	8	2.344	.240	--	-19	--	MS172341
1.875	16UNJ-3B	.325	2.298	10	--	--	-26	--	-26	--
	16N-3B	.312	2.656	8	2.469	.240	--	-20	--	MS172343
2.000	16UNJ-3B	.325	2.448	10	--	--	-28	--	-28	--
	16UN-3B	.312	2.781	8	2.594	.240	--	-21	--	MS172345
2.125	16UNJ-3B	.375	2.545	10	--	--	-30	--	-30	--
	16N-3B	.312	2.906	8	2.719	.240	--	-22	--	MS172347
2.250	16UNJ-3B	.375	2.695	10	--	--	-32	--	-32	--
	16UN-3B	.312	3.031	8	2.844	.240	--	-23	--	MS172349
2.375	16UNJ-3B	.375	2.820	10	--	--	-34	--	-34	--
	16N-3B	.312	3.156	8	2.969	.240	--	-24	--	MS172351
2.500	16UNJ-3B	.375	2.970	10	--	--	-36	--	-36	--
	16UN-3B	.312	3.281	8	3.094	.240	--	-25	--	MS172353
2.750	16UNJ-3B	.375	3.245	10	--	--	-39	--	-39	--
3.000	16UNJ-3B	.375	3.520	10	--	--	-41	--	-41	--

NOTE: To be used with MS9952 cupwashers

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE II

Material	Alloy Steel
Protective Finish	None
Rockwell Hardness	C26-32

Thread		B Nom	ØC Nom	J (slots)	F Nom	G Min	AS3163 + Dash No.
.500	28UNJEF-3B	.188	1.042	8	.922	.120	-04
.625	24UNJEF-3B	.219	1.167	8	1.047	.120	-06
.750	20UNJEF-3B	.250	1.387	8	1.266	.178	-08
.875	20UNJEF-3B	.250	1.526	8	1.406	.178	-10
1.000	20UNJEF-3B	.281	1.714	8	1.531	.178	-12
1.125	18UNJEF-3B	.281	1.870	8	1.688	.178	-14
1.250	18UNJEF-3B	.281	1.995	8	1.812	.178	-16
1.375	18UNJEF-3B	.281	2.120	8	1.938	.178	-18
1.500	18UNJEF-3B	.281	2.245	8	2.062	.240	-20
1.625	18UNJEF-3B	.312	2.370	8	2.188	.240	-22
1.750	16UNJ-3B	.312	2.526	8	2.344	.240	-24
1.875	16UNJ-3B	.312	2.651	8	2.469	.240	-26
2.000	16UNJ-3B	.312	2.776	8	2.594	.240	-28
2.125	16UNJ-3B	.312	2.901	8	2.719	.240	-30
2.250	16UNJ-3B	.312	3.026	8	2.844	.240	-32
2.375	16UNJ-3B	.312	3.151	8	2.969	.240	-34
2.500	16UNJ-3B	.312	3.276	8	3.094	.240	-36

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1001
NUT, PLAIN, SLOTTED, HEXAGON
APPLICABLE DOCUMENTS: MS9363, MS9364, MS35692

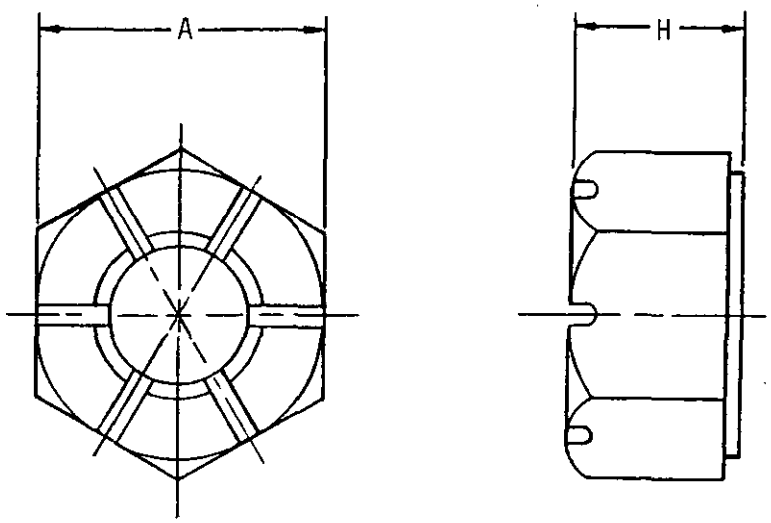


TABLE I

Material				Brass	Carbon steel		CRES		
					Grade B	Grade C			
Protective finish				Black oxide	Cadmium plate		Passivate	None	Silver plate
Thread		A Nom	H Nom	MS35692 + Dash no.				MS9363 + Dash no.	MS9364 + Dash no.
.164	36UNJF-3B	.344	.156	--	--	--	--	-08	-08
.190	32UNJF-3B	.375	.188	--	--	--	--	-09	-09
.250	20UNC-2B	.438	.218	-4	-1	-2	-3	--	--
	28UNF-2B			-8	-5	-6	-7	--	--
	28UNJF-3B		.188	--	--	--	--	-10	-10
.3125	18UNC-2B	.500	.265	-12	-9	-10	-11	--	--
	24UNF-2B			-16	-13	-14	-15	--	--
	24UNJF-3B		.188	--	--	--	--	-11	-11
.375	16UNC-2B	.562	.328	-20	-17	-18	-19	--	--
	24UNF-2B			-24	-21	-22	-23	--	--
	24UNJF-3B		.219	--	--	--	--	-12	-12
.4375	14UNC-2B	.688	.375	-28	-25	-26	-27	--	--
	20UNF-2B			-32	-29	-30	-31	--	--
	20UNJF-3B		.219	--	--	--	--	-13	-13
.500	13UNC-2B	.750	.438	-36	-33	-34	-35	--	--
	20UNF-2B			-40	-37	-38	-39	--	--
	20UNJF-3B		.250	--	--	--	--	-14	-14
.625	11UNC-2B	.938	.546	-52	-49	-50	-51	--	--
	18UNF-2B			-56	-53	-54	-55	--	--
	18UNJF-3B		.312	--	--	--	--	-16	-16
.750	10UNC-2B	1.125	.640	-60	-57	-58	-59	--	--
	16UNF-2B			-64	-61	-62	-63	--	--
	16UNJF-3B	1.062	.375	--	--	--	--	-17	-17
.875	9UNC-2B	1.312	.750	-68	-65	-66	-67	--	--
	14UNF-2B			-72	-69	-70	-71	--	--
	14UNJF-3B	1.250	.438	--	--	--	--	-18	-18
1.000	8UNC-2B	1.500	.859	-76	-73	-74	-75	--	--
	12UNF-2B			-80	-77	-78	-79	--	--
	12UNJF-3B	1.438	.500	--	--	--	--	-19	-19
1.125	7UNC-2B	1.688	.969	-84	-81	-82	-83	--	--
	12UNF-2B			-88	-85	-86	-87	--	--
1.250	7UNC-2B	1.875	1.016	-92	-89	-90	-91	--	--
	12UNF-2B			-96	-93	-94	-95	--	--
1.375	6UNC-2B	2.062	1.171	-100	-97	-98	-99	--	--
	12UNF-2B			-104	-101	-102	-103	--	--
1.500	6UNC-2B	2.250	1.281	-108	-105	-106	-107	--	--
	12UNF-2B			-112	-109	-110	-111	--	--

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1002

NUT, PLAIN, SLOTTED, HEXAGON, SHEAR

APPLICABLE DOCUMENT: AN320

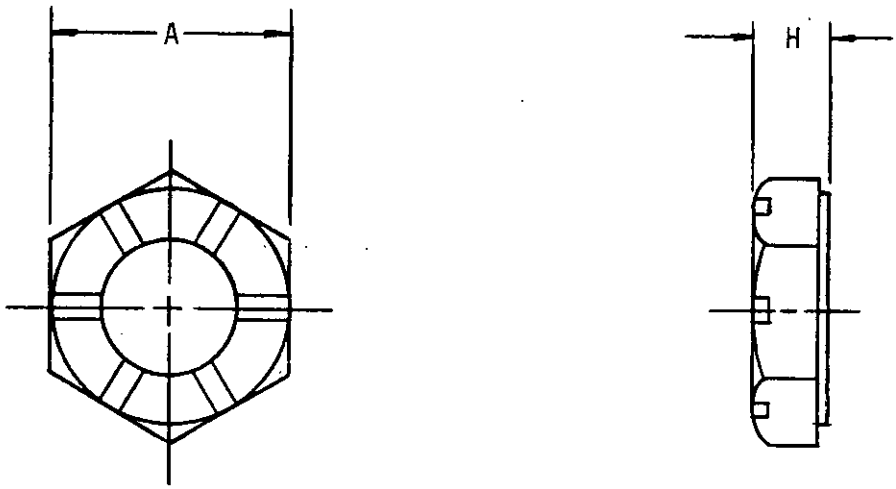


TABLE I

Material					Aluminum alloy	Steel	CRES
Protective finish					Anodize	Cadmium plate	Passivate
Thread	A Nom.	H Nom.	Tensile strength min (lbs) Steel	Tensile strength min (lbs) Al. alloy	AN320 +Dash no.	AN320 +Dash no.	AN320 +Dash no.
.138-40UNF-3B	.312	.156	— —	— —	D1	-1	C1
.164-36UNF-3B	.344	.156	— —	— —	D2	-2	C2
.190-32UNF-3B	.375	.188	1,105	550	D3	-3	C3
.250-28UNF-3B	.438	.188	2,040	1,015	D4	-4	C4
.3125-24UNF-3B	.500	.188	3,250	1,610	D5	-5	C5
.375-24UNF-3B	.562	.219	5,050	2,510	D6	-6	C6
.4375-20UNF-3B	.625	.219	6,800	3,375	D7	-7	C7
.500-20UNF-3B	.750	.250	9,250	4,590	D8	-8	C8
.625-18UNF-3B	1.000	.312	15,050	7,450	D10	-10	C10
.750-16UNF-3B	1.125	.375	22,000	10,900	D12	-12	C12
.875-14UNF-3B	1.312	.438	30,000	14,900	D14	-14	C14
1.000-12UNF-3B	1.500	.500	40,350	20,000	D15	-15	C15
1.125-12UNF-3B	1.688	.562	50,900	25,250	D18	-18	C18
1.250-12UNF-3B	1.875	.625	65,100	32,200	D20	-20	C20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1101

NUT, PLAIN, SPLINE, ROUND

APPLICABLE DOCUMENT: MIL-N-45938/12

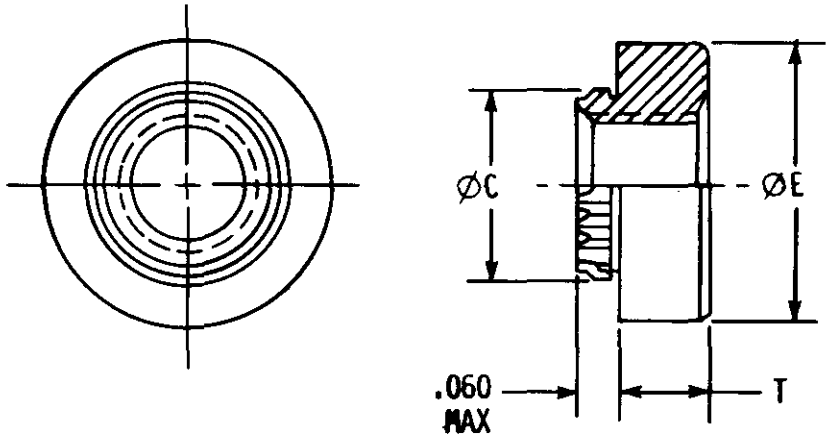


TABLE I

Material				Steel	Cres
Protective Finish				Tin Plate	Passivate
Thread (-2B)	ØC Min	ØE Min	T Min	M45938/12 + Dash No.	
.086-56UNC	.160	.219	.065	1	1C
.112-40UNC	.179	.219	.065	2	2C
.138-32UNC	.226	.281	.065	3	3C
.164-32UNC	.263	.344	.096	4	4C
.190-32UNC	.285	.375	.127	5	5C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1201

NUT, PLAIN, SQUARE

APPLICABLE DOCUMENTS: MS16211, MS21304, MS27040

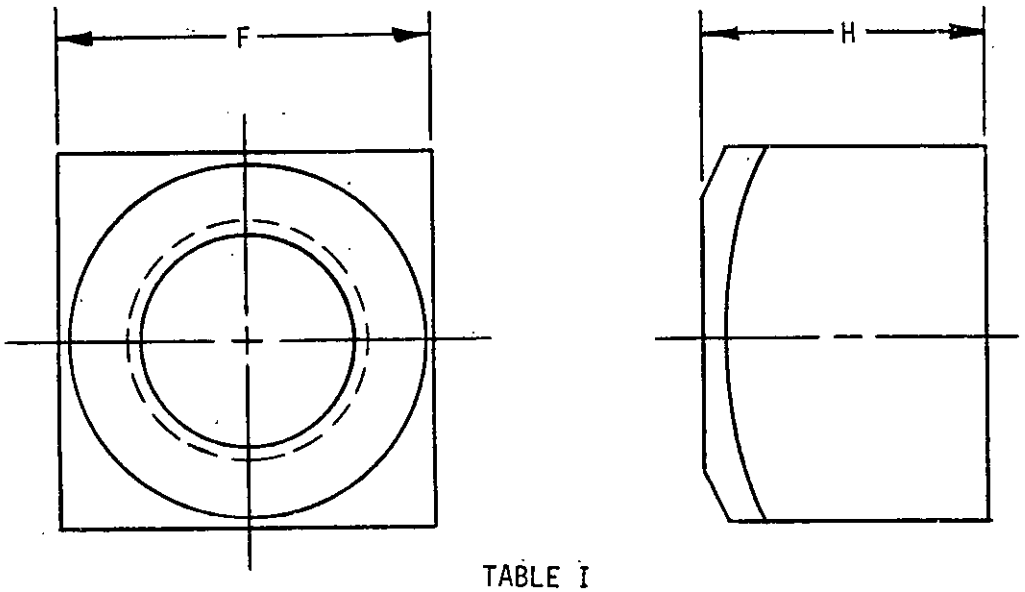


TABLE I

Material ----------			Carbon Steel	Steel	Copper Silicon Alloy 1/
Protective finish ----------			Cadmium plate	Galvanize	None specified
Thread	F Max	H Max	MS27040 +Dash no.	MS21304 +Dash no.	MS16211 +Dash no.
.086-56UNC-2B	.188	.066	-2	--	--
.112-40UNC-2B	.250	.098	-4	--	--
.138-32UNC-2B	.312	.114	-6	--	--
.164-32UNC-2B	.344	.130	-7	--	--
.190-24UNC-2B	.375	.130	-8	--	--
.250-20UNC-2B	.438	.235	-10	-1	-1
.3125-18UNC-2B	.562	.283	-11	-2	-2
.375-16UNC-2B	.625	.346	-12	-3	-3
.4375-14UNC-2B	.750	.394	-13	-4	-4
.500-13UNC-2B	.812	.458	-14	-5	-5
.625-11UNC-2B	1.000	.569	-15	-6	-6
.750-10UNC-2B	1.125	.680	-16	-7	-7
.875-9UNC-2B	1.312	.792	-17	--	-8
1.000-8UNC-2B	1.500	.903	-18	-8	-9
1.125-7UNC-2B	1.688	1.030	-19	--	-10
1.250-7UNC-2B	1.875	1.126	-20	--	-11
1.375-6UNC-2B	2.062	1.237	-21	--	-12
1.500-6UNC-2B	2.250	1.348	-22	--	-13

1/ Non magnetic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1301

NUT, PLAIN, WELDING (WITH PILOT)

APPLICABLE DOCUMENT: MS27128


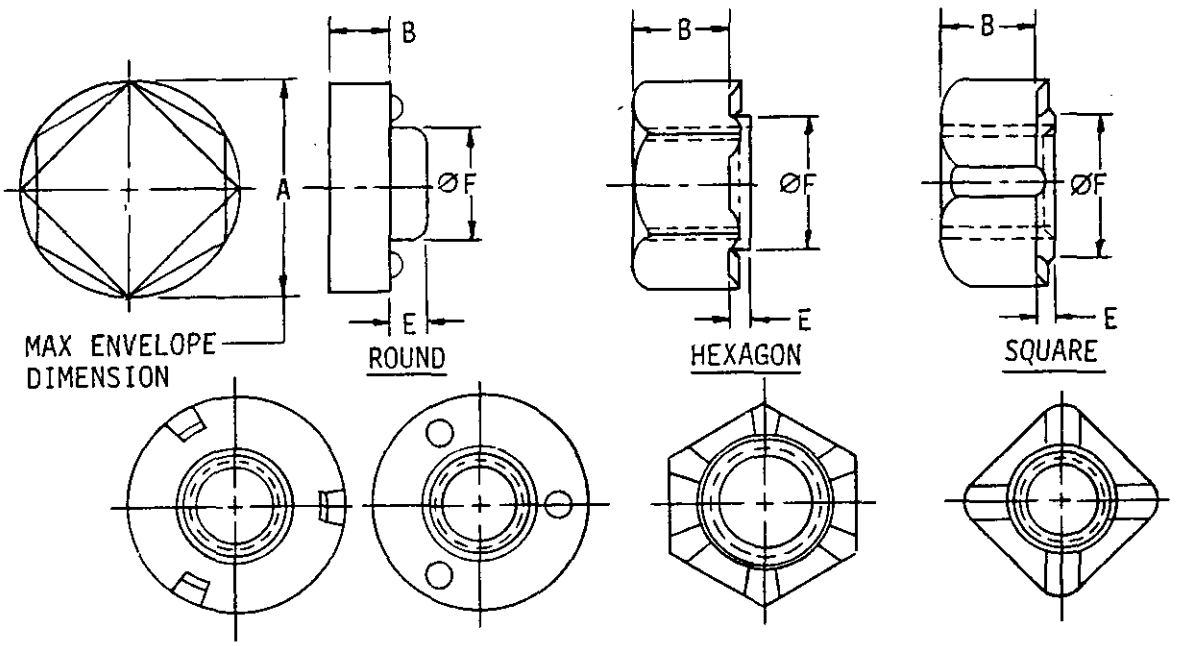


TABLE I

Material	Carbon Steel						
Protective finish	Uncoated						
Thread	Ø or points A Max	B Max	E Max	ØF Max	MS27128 + Dash no. Hex	Square	Round
.164 -32UNC-2B	.707	.197	.067	.406	-1	-19	-37
			.099		-2	-20	-38
.190 -24UNC-2B	.750	.260	.067	.406	-3	-21	-39
			.099		-4	-22	-40
.250 -20UNC-2B	.750	.260	.067	.406	-5	-23	-41
			.099		-6	-24	-42
.312 -18UNC-2B	.795	.229	.070	.469	-7	-25	-43
			.099		-8	-26	-44
.375 -16UNC-2B	.884	.330	.070	.531	-9	-27	-45
			.099		-10	-28	-46
.500 -13UNC-2B	1.149	.385	.070	.719	-13	-31	-49
			.099		-14	-32	-50
.625 -11UNC-2B	1.237	.570	.070	.781	-17	-35	-53
			.099		-18	-36	-54

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1302
NUT, PLAIN, WELDING (WITHOUT PILOT)
APPLICABLE DOCUMENT: MS27127

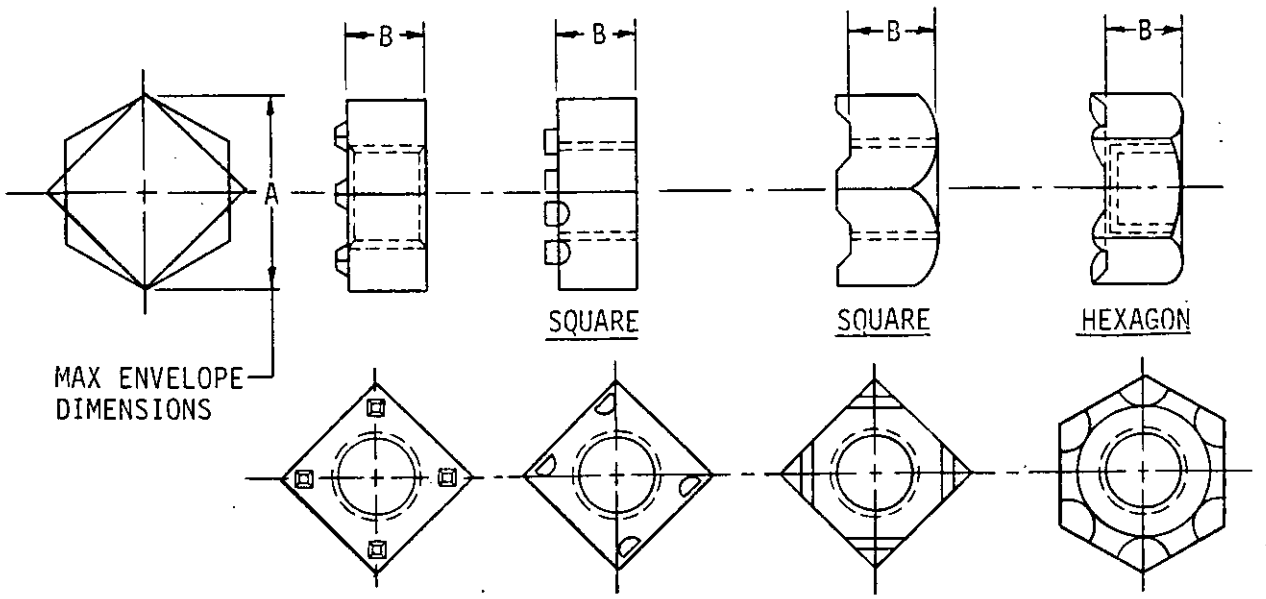

ACCEPTABLE LUG DESIGNS

TABLE I

Material ----------			Carbon steel	
Protective finish ----------			Uncoated	
Thread	Ø or points A Max	B Max	MS27127 +Dash no.	
			Square	Hex
.138-32UNC-2B	.642	.126	-10	-12
.164-32UNC-2B	.642	.204	-1	-13
.190-24UNC-2B	.642	.204	-2	-14
.250-20UNC-2B	.810	.255	-3	-16
.312-18UNC-2B	.900	.313	-4	-17
.375-16UNC-2B	.990	.365	-5	-18
.500-13UNC-2B	1.350	.495	-7	-20
.625-11UNC-2B	1.414	.635	-9	-22

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1401

NUT, PLAIN, WING

APPLICABLE DOCUMENTS: MS35425 MS35426 MS51468

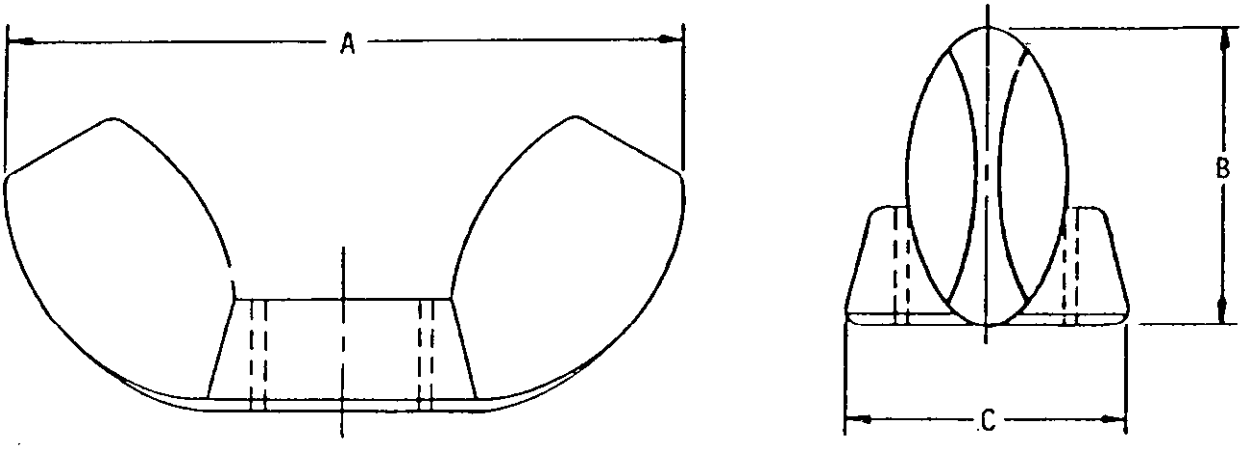


TABLE I

Material					Brass		Carbon Steel		
Protective finish					None specified		Cadmium plate		Zinc Coat
Thread		A Nom	B Nom	C Nom	MS35425 + Dash no.	MS35426 + Dash no.	MS35425 + Dash no.	MS35426 + Dash no.	MS51468 + Dash no.
.138	32UNC-2B	.84	.41	.41	-51	--	-50	--	--
.164	32UNC-2B	.84	.41	.41	-53	--	-52	--	-01
.190	24UNC-2B	.84	.41	.41	-38	--	-37	--	--
	32UNF-2B				--	-26	--	-25	--
.250	20UNC-2B	1.03	.50	.47	-40	--	-39	--	-02
	28UNF-2B				--	-28	--	-27	--
.3125	18UNC-2B	1.18	.59	.54	-24	--	-41	--	-03
	24UNF-2B				--	-30	--	-29	--
.375	16UNC-2B	1.38	.72	.67	-28	--	-42	--	-04
	24UNF-2B				--	-32	--	-31	--
.500	13UNC-2B	1.87	.93	.89	-36	--	-44	--	-05
	20UNF-2B				--	-36	--	-35	--

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1501

NUT,PLAIN AND SELF-LOCKING, ASSEMBLED WASHER, CASTELLATED. HEXAGON, COUNTERBORED, 250°F, 450°F

APPLICABLE DOCUMENTS: MS21224, MS21244

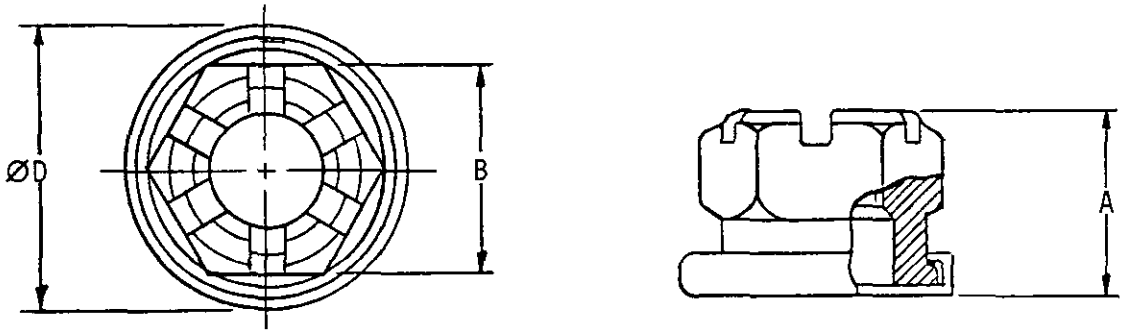


TABLE I

Material ----------	Nut - - - - -			Steel	CRES
	Washer - - - -			Aluminum alloy	Aluminum alloy
Protective finish ---------	Nut - - - - -			Cadmium plate	Cadmium plate
	Washer - - -			Alodine	Alodine
Thread	A Max	B Nom	ØD Max	MS21224 + Dash no.	
.190-32UNJF-3B	.374	.375	.490	-3	-3C
.250-28UNJF-3B	.405	.438	.560	-4	-4C
.3125-24UNJF-3B	.436	.500	.640	-5	-5C
.375-24UNJF-3B	.482	.562	.710	-6	-6C
.4375-20UNJF-3B	.513	.625	.785	-7	-7C
.500-20UNJF-3B	.576	.750	.925	-8	-8C
.625-18UNJF-3B	.822	1.000	1.224	-10	-10C
.750-16UNJF-3B	.951	1.062	1.283	-12	-12C
.875-14UNJF-3B	1.058	1.250	1.495	-14	-14C
1.000-12UNJF-3B	1.202	1.438	1.707	-16	-16C

NOTE: Self-locking feature is insert, nylon or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1502

NUT, SELF-LOCKING, ASSEMBLED WASHER, SLOTTED HEXAGON, COUNTERBORED, 450°F

APPLICABLE DOCUMENT: MS14146

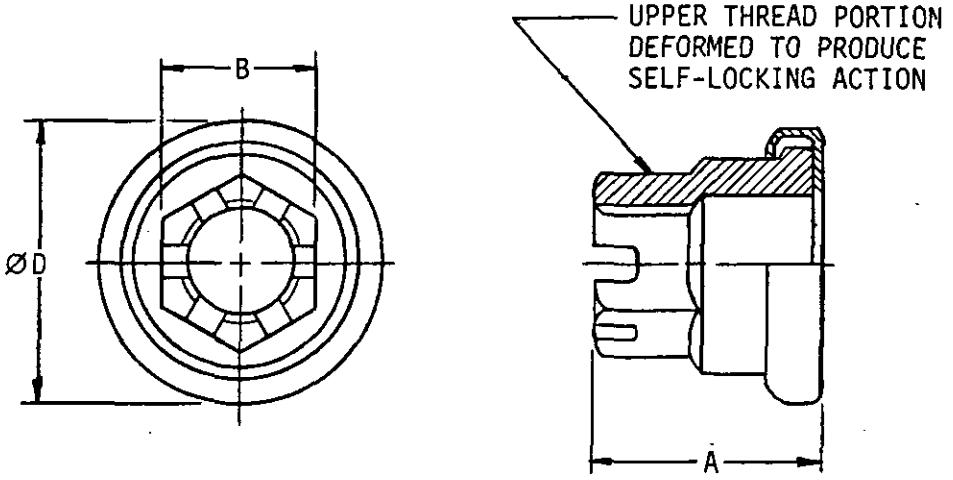


TABLE I

Material	Nut	Carbon steel
	Washer	CRES
Protective finish	Nut 1/	Cadmium plate
	Washer	Passivate

Thread	A Max	B Nom	Ø D Nom	MS14146 + Dash no
.190-32UNJF-3B	.374	.250	.475	-3
.250-28UNJF-3B	.405	.312	.545	-4
.312-24UNJF-3B	.436	.375	.625	-5
.375-24UNJF-3B	.482	.438	.695	-6
.437-20UNJF-3B	.513	.500	.770	-7
.500-20UNJF-3B	.576	.562	.910	-8
.625-18UNJF-3B	.819	.750	1.128	-10
.750-16UNJF-3B	.951	.875	1.268	-12
.875-14UNJF-3B	1.058	1.000	1.480	-14
1.000-12UNJF-3B	1.202	1.125	1.692	-16

1/ Finish: Plus molybdenum disulfide dry film lubricant.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1601

NUT, SELF-LOCKING, BARREL (FLOATING)

APPLICABLE DOCUMENT: NAS577

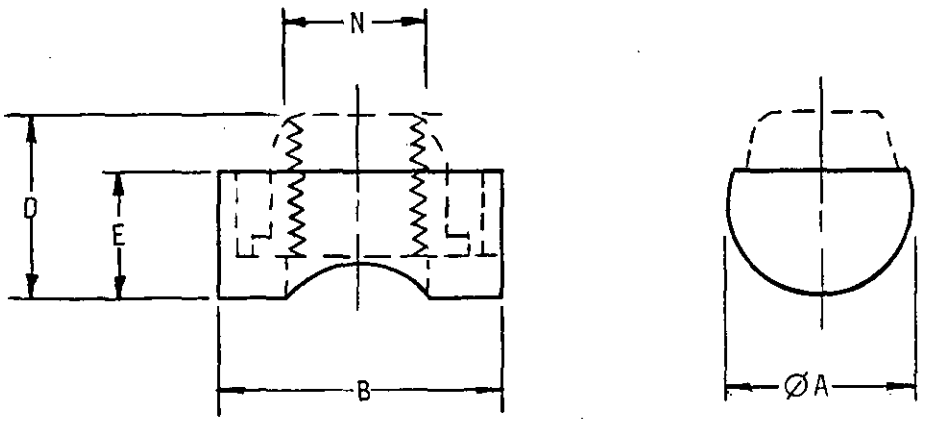


TABLE I

Material						Non Corrosion Resistant Steel	
Protective finish						Cadmium plate	Cadmium 1/ *fluoroborate*
Thread UNJF or UNF-3B	Ø A Max	B Nom	D Max	E Max	N Max	NAS577 + Dash no.	
.250-28	.528	.625	.406	.320	.375	B-4A	B-4F
.3125-24	.590	.688	.468	.360	.406	B-5A	B-5F
.375-24	.684	.750	.531	.420	.500	B-6A	B-6F
.4375-20	.778	.875	.625	.470	.563	B-7A	B-7F
.500-20	.872	1.000	.703	.540	.625	B-8A	B-8F
.625-18	1.060	1.125	.844	.650	.750	B-10A	B-10F
.750-16	1.278	1.500	1.062	.750	.875	B-12A	B-12F
.875-14	1.433	1.531	1.156	.850	1.000	B-14A	B-14F
1.000-12	1.559	1.728	1.281	.880	1.125	B-16A	B-16F
1.125-12	1.872	2.063	1.562	1.230	1.250	B-18A	B-18F
1.250-12	2.122	2.352	1.813	1.320	1.375	B-20A	B-20F
1.375-12	2.372	2.646	2.000	1.460	1.500	B-22A	B-22F
1.500-12	2.622	3.000	2.187	1.520	1.625	B-24A	B-24F

1/ Add "X" in addition to "A" or "F" for plated steel nuts without lubricant.

Note:


Total Float: Transverse: .028 minimum
Longitudinal: Permissable but not required
Vertical: .016 maximum


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1701


NUT, SELF-LOCKING, BLIND RIVET (CLOSED END) ELLIPICAL HEAD

APPLICABLE DOCUMENT: NAS1735

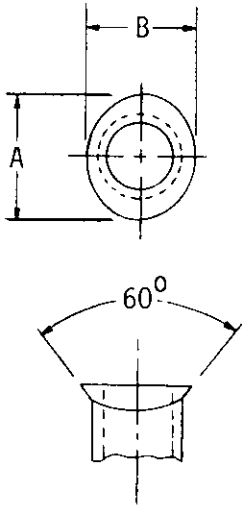

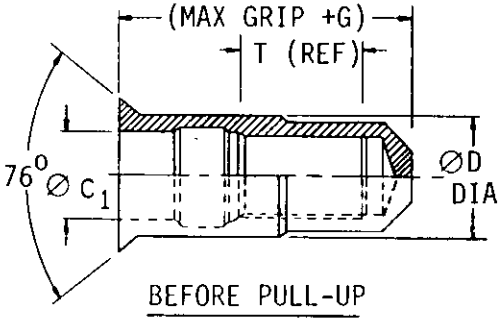

BEFORE PULL-UP

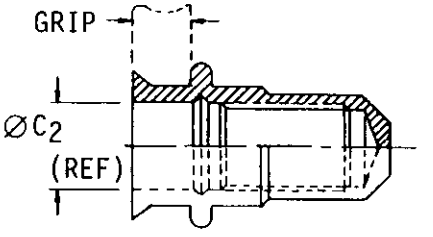

AFTER PULL-UP

TABLE I

Material	CRES
Protective finish	Passivate 2/

Thread	A Nom	B Nom	ØC1 Max	ØC2 Max	ØD Max	G Nom	T Min (Ref)	NAS 1735 +Dash No. 1/
.190 -32UNJF-3B	.331	.280	.196	.195	.241	.701	.468	-3-( )
.250 -28UNJF-3B	.438	.372	.258	.255	.327	.837	.544	-4-( )
.3125 -24UNJF-3B	.520	.446	.320	.318	.396	.958	.614	-5-( )
.375 -24UNJF-3B	.623	.526	.383	.380	.471	1.119	.724	-6-( )
.4375 -20UNJF-3B	.706	.600	.445	.442	.539	1.274	.834	-7-( )
.500 -20UNJF-3B	.794	.680	.508	.505	.614	1.404	.946	-8-( )
.625 -18UNJF-3B	.978	.848	.633	.630	.769	1.710	1.192	-10-( )

1/ "( )" Indicates second dash number, Grip range.

2/ Add "P" after second dash number for Cadmium plate.

TABLE II

Grip range	Dash no.	Grip range	Dash no.
3/.080 - .130	-1	.880 - .940	-15
.100 - .160	-2	.940 - 1.000	-16
.160 - .220	-3	1.000 - 1.060	-17
.220 - .280	-4	1.060 - 1.120	-18
.280 - .340	-5	1.120 - 1.180	-19
.340 - .400	-6	1.180 - 1.240	-20
.400 - .460	-7	1.240 - 1.300	-21
.460 - .520	-8	1.300 - 1.360	-22
.520 - .580	-9	1.360 - 1.420	-23
.580 - .640	-10	1.420 - 1.480	-24
.640 - .700	-11	1.480 - 1.540	-25
.700 - .760	-12	1.540 - 1.600	-26
.760 - .820	-13	1.600 - 1.660	-27
.820 - .880	-14		

3/ Special Grip range for -1 only.

TABLE III

Thread/Grip range combinations	
.190 (-1 through -9)	.4375 (-3 through -24)
.250 (-2 through -14)	.500 (-3 through -27)
.3125 (-2 through -17)	.625 (-3 through -27)
.375 (-3 through -20)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1702

NUT, SELF-LOCKING, BLIND RIVET (OPEN END), ELLIPTICAL HEAD

APPLICABLE DOCUMENT: NAS1734

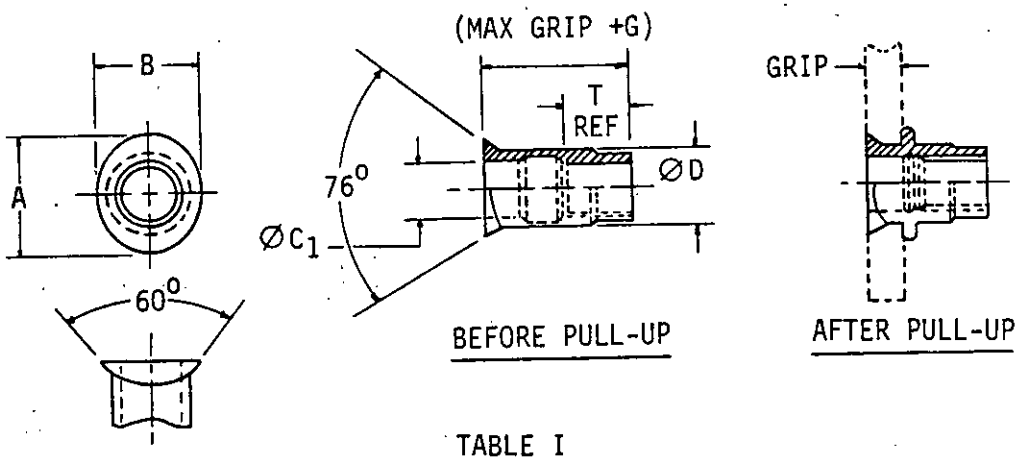


TABLE I

Material								CRES
Protective finish								Passivate 2/
Thread		A Nom	B Nom	ØC1 Max	ØD Max.	G Nom	T Min (Ref)	NAS 1734 +Dash no. 1/
.190	-32UNJF-3B	.331	.280	.196	.241	.335	.260	-3-( )
.250	-28UNJF-3B	.438	.372	.258	.327	.387	.278	-4-( )
.3125	-24UNJF-3B	.520	.446	.320	.396	.468	.340	-5-( )
.375	-24UNJF-3B	.623	.526	.383	.471	.577	.416	-6-( )
.4375	-20UNJF-3B	.706	.600	.445	.539	.678	.508	-7-( )
.500	-20UNJF-3B	.794	.680	.508	.614	.789	.619	-8-( )
.625	-18UNJF-3B	.978	.848	.633	.769	1.041	.862	-10-( )

1/ "( )" Indicates second dash number, "Grip range".

2/ Add "P" after second dash number for Cadmium plating.

TABLE II

Grip range	Dash no.	Grip range	Dash no.
3/.080 - .130	-1	.640 - .700	-11
.100 - .160	-2	.700 - .760	-12
.160 - .220	-3	.760 - .820	-13
.220 - .280	-4	.820 - .880	-14
.280 - .340	-5	.880 .940	-15
.340 - .400	-6	.940 1.000	-16
.400 - .460	-7	1.000 - 1.060	-17
.460 - .520	-8	1.060 - 1.120	-18
.520 - .580	-9	1.120 - 1.180	-19
.580 - .640	-10	1.180 - 1.240	-20

3/ Special Grip range for -1 only.

TABLE III

The following are thread sizes and the applicable grip range dash number	
.190 (-1 through -9)	.4375 (-3 through -20)
.250 (-2 through -14)	.500 (-3 through -20)
.3125 (-2 through -17)	.625 (-3 through -20)
.375 (-3 through -20)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1703

NUT, SELF-LOCKING, BLIND RIVET, OPEN END, COUNTERSUNK HEAD

APPLICABLE DOCUMENT: NAS1330

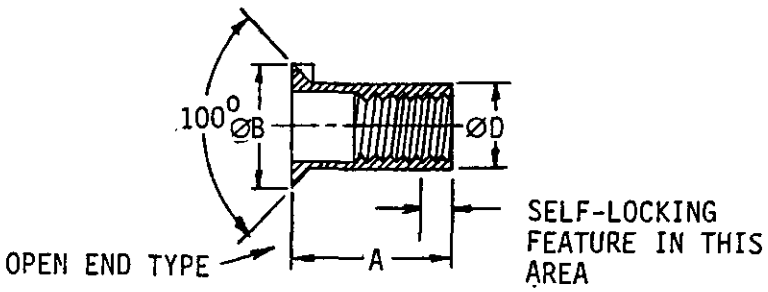


TABLE I

Material ----------	Alloy steel
Protective finish ----------	Cadmium plate


Thread	ØB Nom	ØD Nom	Grip range	A Open End	A Keyed	NAS1330 + Dash no.
.112-40UNC-3B	.263	.155	.050 - .081		.370	H04K81L
			.081 - .106		.395	H04K106L
			.106 - .131		.420	H04K131L
			.131 - .156		.450	H04K156L
			.156 - .181		.475	H04K181L
.138-32UNC-3B	.323	.189	.065 - .106		.500	H06K106L
			.106 - .161		.500	H06K161L
			.161 - .201		.562	H06K201L
			.201 - .241		.625	H06K241L
			.241 - .281		.625	H06K281L
.164-32UNC-3B	.355	.221	.065 - .106		.500	H08K106L
			.106 - .161		.500	H08K161L
			.161 - .201		.562	H08K201L
			.201 - .241		.625	H08K241L
			.241 - .281		.687	H08K281L
.190-32UNF-3B	.391	.250	.065 - .116		.578	H3K116L
			.116 - .166		.625	H3K166L
			.161 - .216		.687	H3K216L
			.216 - .266		.734	H3K266L
			.266 - .316		.781	H3K316L
.250-28UNF-3B	.529	.332	.089 - .151		.687	H4K151L
			.151 - .211		.750	H4K211L
			.211 - .271		.812	H4K271L
			.271 - .331		.875	H4K331L
			.331 - .391		.937	H4K391L
.3125-24UNF-3B	.656	.413	.106 - .181		.844	H5K181L
			.181 - .256		.937	H5K256L
			.256 - .331		1.000	H5K331L
			.331 - .406		1.093	H5K406L
.375-24UNF-3B	.770	.490	.125 - .211		.938	H6K211L
			.211 - .296		1.031	H6K296L
			.296 - .381		1.125	H6K381L
			.381 - .466		1.219	H6K466L
.500-20UNF-3B	.990	.640	.156 - .276		1.188	H8K276L
			.276 - .396		1.312	H8K396L
			.396 - .516		1.438	H8K516L
			.516 - .636		1.578	H8K636L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1704

NUT, SELF-LOCKING, BLIND RIVET, OPEN END, FLAT HEAD

APPLICABLE DOCUMENTS: NAS1329

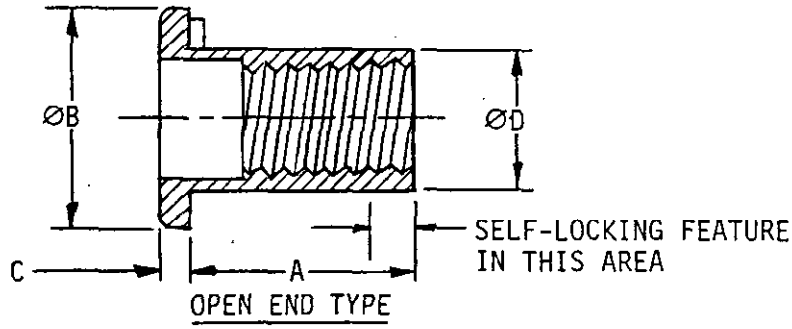

OPEN END TYPE

TABLE I

Material	Alloy steel
Protective finish	Cadmium plate

Thread	ØB Nom	C Nom	ØD Nom	Grip range	A Open end Keyed	NAS 1329 + Dash no.
.112-40UNC-3B	.270	.025	.155	.010 - .060	.345	H04K60L
				.060 - .085	.370	H04K85L
				.085 - .110	.400	H04K110L
				.110 - .135	.425	H04K135L
				.135 - .160	.450	H04K160L
.138-32UNC-3B	.325	.032	.189	.010 - .075	.438	H06K75L
				.075 - .120	.500	H06K120L
				.120 - .160	.500	H06K160L
				.160 - .200	.562	H06K200L
				.200 - .240	.625	H06K240L
.164-32UNC-3B	.357	.032	.221	.010 - .075	.438	H08K75L
				.075 - .120	.500	H08K120L
				.120 - .160	.500	H08K160L
				.160 - .200	.625	H08K200L
				.200 - .240	.625	H08K240L
.190-32UNC-3B	.406	.038	.250	.010 - .080	.531	H3K80L
				.080 - .130	.594	H3K130L
				.130 - .180	.641	H3K180L
				.180 - .230	.703	H3K230L
				.230 - .280	.750	H3K280L
.250-28UNF-3B	.475	.058	.332	.020 - .080	.625	H4K80L
				.080 - .140	.687	H4K140L
				.140 - .200	.750	H4K200L
				.200 - .260	.812	H4K260L
				.260 - .320	.875	H4K320L
.3125-24UNF-3B	.665	.062	.413	.050 - .125	.750	H5K125L
				.125 - .200	.875	H5K200L
				.200 - .275	.937	H5K275L
				.275 - .350	1.032	H5K350L
.375-24UNF-3B	.781	.088	.490	.030 - .115	.844	H6K115L
				.115 - .200	.938	H6K200L
				.200 - .285	1.031	H6K285L
				.285 - .370	1.125	H6K370L
.500-20UNF-3B	1.000	.125	.640	.025 - .145	1.062	H8K145L
				.145 - .265	1.188	H8K265L
				.265 - .385	1.312	H8K385L
				.385 - .505	1.453	H8K505L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1705

NUT, SELF-LOCKING, BLIND RIVET, SERRATED HEAD

APPLICABLE DOCUMENT: NAS1731

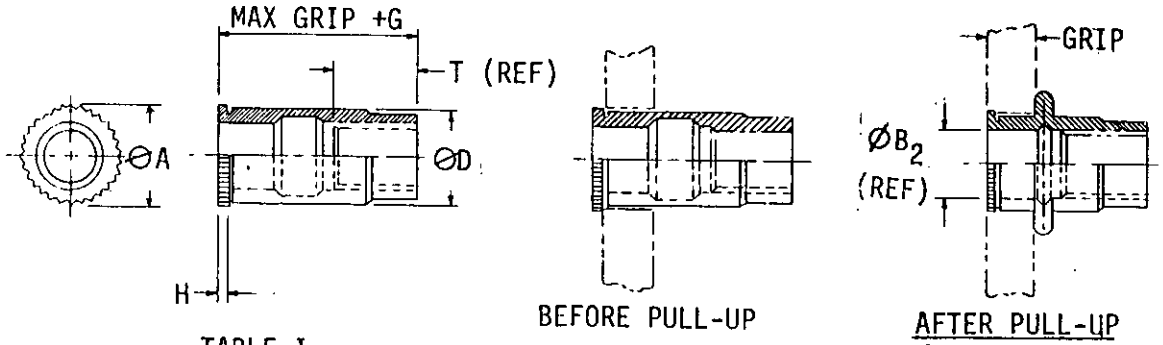


TABLE I

Material								CRES
Protective finish								Passivate 2/
Thread		ØA Max	ØB2 Max (ref)	ØD Max	G Nom	H Max	T min thd (ref)	NAS 1731 +Dash no. 1/
.112	-40UNJC-3B	.176	.123	.155	.234	.021	.181	-04-( )
.138	-32UNJC-3B	.208	.145	.188	.300	.021	.235	-06-( )
.164	-32UNJC-3B	.241	.171	.220	.300	.021	.235	-08-( )
.190	-32UNJF-3B	.267	.195	.241	.335	.025	.260	-3-( )
.250	-28UNJF-3B	.353	.255	.327	.387	.030	.278	-4-( )
.3125	-24UNJF-3B	.425	.318	.396	.468	.035	.340	-5-( )
.375	-24UNJF-3B	.510	.380	.471	.577	.035	.416	-6-( )
.4375	-20UNJF-3B	.575	.442	.539	.678	.035	.508	-7-( )
.500	-20UNJF-3B	.654	.505	.614	.789	.035	.619	-8-( )
.625	-18UNJF-3B	.808	.630	.769	1.041	.035	.862	-10-( )
.750	-16UNJF-3B	.966	.755	.918	1.234	.035	.966	-12-( )

1/ "( )" indicates second dash number, Grip range.

2/ Add "P" after second dash number for Cadmium plating.

NOTES:

Add "L" between dash numbers for Cadmium plating.
Example part number: NAS-1731-4L6P

TABLE II

2nd Dash number "( )"	Thread size			
	-04	-06	-08	-3 thru -12
	Grip range			
-1	.030 - .050	.030 - .060	.030 - .060	.040 - .080
-2	.050 - .070	.060 - .090	.060 - .090	.080 - .120
-3	.070 - .090	.090 - .120	.090 - .120	.120 - .160
-4	.090 - .110	.120 - .150	.120 - .150	.160 - .200
-5	.110 - .130	.150 - .180	.150 - .180	.200 - .240
-6	.130 - .150	.180 - .210	.180 - .210	.240 - .280
-7	.150 - .170	.210 - .240	.210 - .240	.280 - .320
-8	.170 - .190	.240 - .270	.240 - .270	.320 - .360
-9	--	--	.270 - .300	.360 - .400
-10	--	--	.300 - .330	.400 - .440
-11	--	--	--	.440 - .480
-12	--	--	--	.480 - .520
-13	--	--	--	.520 - .560
-14	--	--	--	.560 - .600
-15	--	--	--	.600 - .640
-16	--	--	--	.640 - .680
-17	--	--	--	.680 - .720
-18	--	--	--	.720 - .760
-19	--	--	--	.760 - .800
-20	--	--	--	.800 - .840
-21	--	--	--	.840 - .880
-22	--	--	--	.880 - .920
-23	--	--	--	.920 - .960
-24	--	--	--	.960 - 1.000
-25	--	--	--	1.000 - 1.040

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1801

NUT, SELF-LOCKING, CAP

APPLICABLE DOCUMENT: MS51865

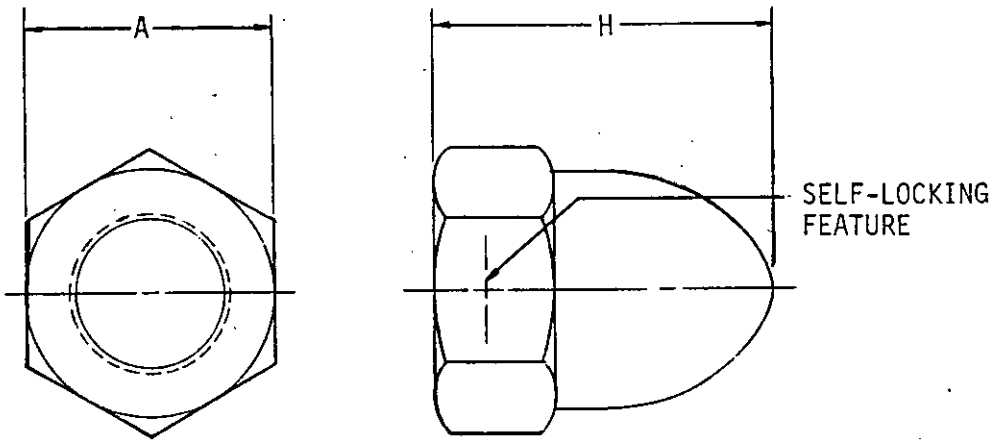


TABLE I

Material				Carbon steel	CRES	Aluminum alloy	Brass
Protective finish				Cadmium plate	Passivate	Anodize	Uncoated
Thread (-2B)		A Nom	H Nom	MS51865 + Dash no.			
.138	32UNC	.312	.34	-1	-1C	-1A	-1B
	40UNF			-2	-2C	-2A	-2B
.164	32UNC	.312	.34	-3	-3C	-3A	-3B
	36UNF			-4	-4C	-4A	-4B
.190	24UNC	.375	.41	-5	-5C	-5A	-5B
	32UNF			-6	-6C	-6A	-6B
.250	20UNC	.438	.47	-7	-7C	-7A	-7B
	28UNF			-8	-8C	-8A	-8B
.312	18UNC	.500	.53	-9	-9C	-9A	-9B
	24UNF			-10	-10C	-10A	-10B
.375	16UNC	.562	.62	-11	-11C	-11A	-11B
	24UNF			-12	-12C	-12A	-12B
.500	13UNC	.750	.81	-15	-15C	-15A	-15B
	20UNF			-16	-16C	-16A	-16B
.625	11UNC	.938	1.00	-19	-19C	-19A	-19B
	18UNF			-20	-20C	-20A	-20B
.750	10UNC	1.062	1.16	-21	-21C	-21A	-21B
	16UNF			-22	-22C	-21A	-21B


NOTE: Locking feature:
All metal or non-metal insert (optional)
Non-metal to be nylon or equivalent.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1901

NUT, SELF-LOCKING, CLINCH (FLOATING, 400°F)

APPLICABLE DOCUMENT: MIL-N-45938/11

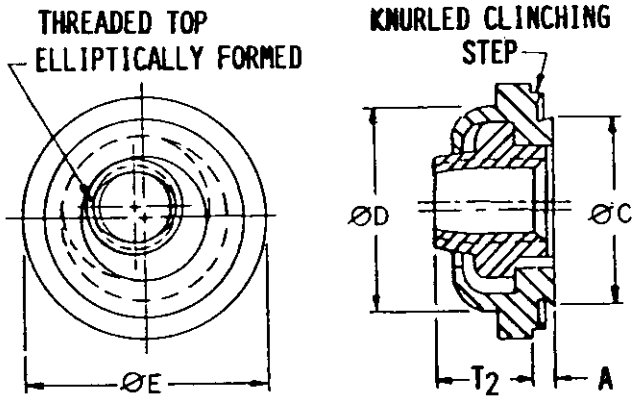

SELF-LOCKING

TABLE I

Material							Carbon Steel	CRES
Protective Finish							Cadmium Plate	Passivate
Thread (-3B)	Panel Thickness Min	A Max	ØC Max	ØD Max	ØE Max	T_2 Max	M45938/11 + Dash No.	
.112-40UNC	.040 / .056	.038 / .054	.289	.290	.36	.17	-1L / -2L	-1CL / -2CL
.138-32UNC	.040 / .056	.038 / .054	.327	.330	.39	.18	-3L / -4L	-3CL / -4CL
.164-32UNC	.040 / .056	.038 / .054	.367	.365	.44	.20	-5L / -6L	-5CL / -6CL
.190-24UNC	.040 / .056	.038 / .054	.405	.405	.47	.25	-7L / -8L	-7CL / -8CL
.190-32UNF	.040 / .056	.038 / .054	.405	.405	.47	.25	-9L / -10L	-9CL / -10CL
.250-20UNC / .250-28UNF	.056	.054	.514	.510	.60	.31	-11L / -12L	-11CL / -12CL

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1902

NUT, SELF-LOCKING, CLINCH (FLOATING 450°F, 125 KSI FTU)

APPLICABLE DOCUMENTS: MS14200, MS14210

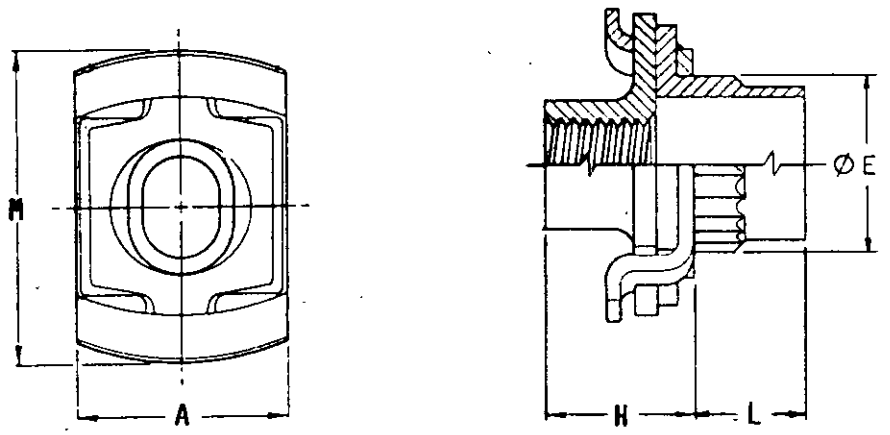


TABLE I

Material	Steel	Alloy Steel	Cres
Protective Finish	Cadmium Plate & Dry Film		Passivate

Thread (-3B)	A Max	ØE Max	H Max	M Max	MS14200 + Dash No.	MS14210 + Dash No.	
.112-40UNJC	.310	.234	.214	.435	-04	-AL04	-CL04
.138-32UNJC	.310	.234	.214	.435	-06	-AL06	-CL06
.164-32UNJC	.405	.304	.270	.587	-08	-AL08	-CL08
.190-32UNJF	.405	.304	.270	.587	-3	-AL3	-CL3
.250-28UNJF	.465	.369	.325	.665	-4	-AL4	-CL4

NOTE: For repair 1/64 oversize, use: MS14201 or MS14211

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE II

L (Nom)	Grip Suffix No.
.073	-2
.099	-4
.130	-6
.161	-8
.192	-10
.223	-12
.254	-14
.285	-16
.316	-18
.347	-20
.378	-22
.409	-24
.440	-26
.471	-28
.502	-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1903

NUT, SELF-LOCKING, CLINCH, FLOATING, KNURLED COLLAR, 450°F AND 600°F

APPLICABLE DOCUMENT: MIL-N-45938/14

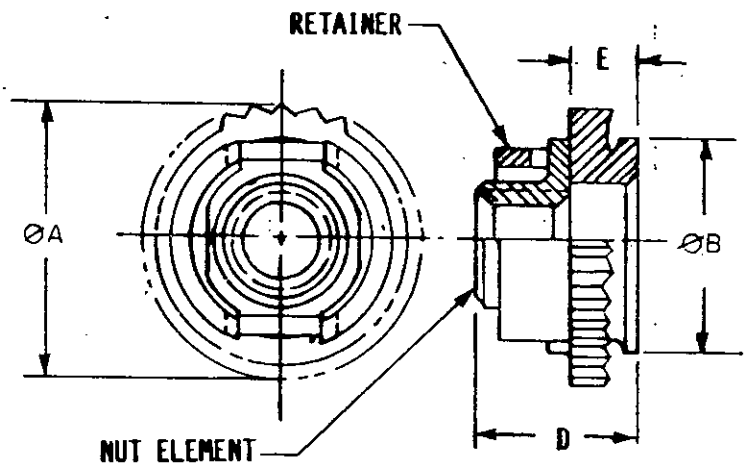


TABLE I

Material ----------						ALLOY STEEL	CRES
Protective Finish----------						CADMIUM PLATE + DRY FILM	Silver Plate + Dry Film
Performance Temperature ----------						450°F	600° F
Thread (-3B)	Panel Thickness Min	ØA Nom	ØB Max	D Max	E Nom	M45938/14 + Dash No.	
.1120-40UNJC / .1380-32UNJC	.045	.350	.280	.225	.088	-2L / -3L	-2CL / -3CL
.1640-32UNJC / .1900-32UNJF	.060	.450	.374	.275 / .295	.115	-4L / -5L	-4CL / -5CL
.2500-20UNJC / .2500-28UNJF	.090	.560	.499	.365	.141	-6L / -7L	-6CL / -7CL

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1904

NUT, SELF-LOCKING, CLINCH, FLOATING, KNURLED COLLAR, MINIATURE, 450°F AND 600°F

APPLICABLE DOCUMENT: MIL-N-45938/13

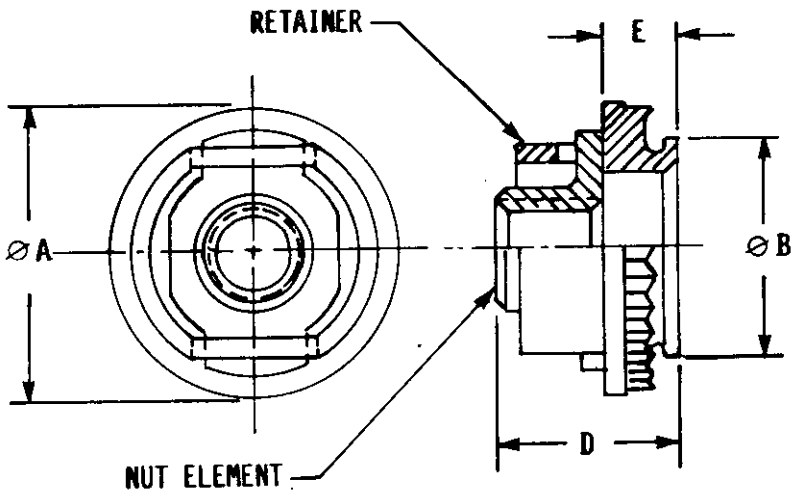


TABLE I

Material						Alloy Steel	CRES
Protective Finish						Cadmium Plate + Dry Film	Silver Plate + Dry Film
Performance Temperature						450°F	600°F
Thread (-3B)	Panel Thickness Min	⌀A Nom	⌀B Max	D Max	E Nom	M45938/13 + Dash No.	
.1120-40UNJC .1380-32UNJC	.040	.320	.249	.224	.077	-2L -3L	-2CL -3CL
.1640-32UNJC .1900-32UNJF	.040	.410	.311	.265 .285	.097	-4L -5L	-4CL -5CL
.2500-20UNJC .2500-28UNJF	.074	.500	.374	.360	.145	-6L -7L	-6CL -7CL

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1905

NUT, SELF-LOCKING, CLINCH (HEXAGON SHANK)

APPLICABLE DOCUMENT: MIL-N-45938/2

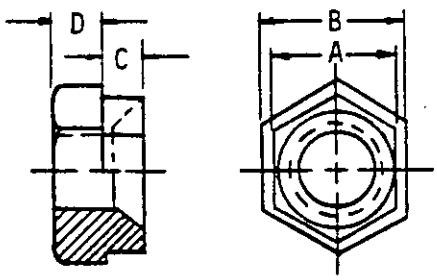


TABLE I

Material ----------	Carbon steel
Protective finish ----------	Cadmium plate

Thread	Sheet thk max	A Nom	B Nom	C Nom	D Nom	M45938/2 + Dash no.
.138-32UNC-2B	.036	.244	.297	.078	.109	-1L
.164-32UNC-2B	.047	.305	.368	.094	.125	-2L
.190-32UNF-2B	.047	.305	.368	.094	.125	-3L
.250-28UNF-2B	.062	.429	.521	.125	.172	-4L
.3125-24UNF-2B	.078	.491	.584	.156	.203	-5L
.375-24UNF-2B	.094	.551	.670	.188	.234	-6L
.500-20UNF-2B	.125	.742	.860	.250	.297	-7L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1906

NUT, SELF-LOCKING, CLINCH (KNURLED COLLAR, 450°F AND 600°F)

APPLICABLE DOCUMENT: MIL-N-45938/3

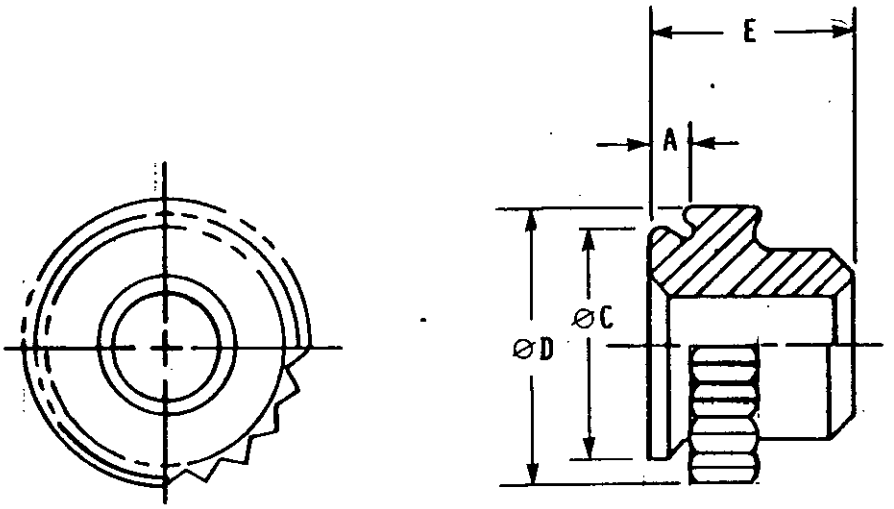


TABLE I

Material ----------						Steel Alloy	CRES 303	CRES A-286
Performance Temperature ----------						450°F	450°F	600°F
Protective Finish ----------						Cadmium Plated	Passivate	Silver Plate
Thread (-3B)	Sheet thk min	A Nom	⌀C Nom	⌀D Nom	E Nom	M45938/3 + Dash No.		
.086-56UNJC	.040	.030	.199	.260	.178	-1L	-1CL	--
			.123	.190	.140	-2L	--	-2CL
.112-40UNJC	.040	.030	.199	.260	.178	-3L	-3CL	--
			.154	.220	.160	-4L	--	-4CL
.138-32UNJC	.040	.030	.226	.290	.178	-5L	-5CL	--
			.186	.250	.178	-6L	--	-6CL
.164-32UNJC	.050	.040	.279	.350	.188	-7L	-7CL	--
			.217	.280	.188	-8L	--	-8CL
.190-24UNJC / -32UNJF	.050	.040	.279	.350	.188	-13L	-13CL	--
						-9L	-9CL	--
.250-20UNJC / -28UNJF	.060	.050	.373	.450	.250	-14L	-14CL	--
						-10L	-10CL	--
.3125-18UNJC / -24UNJF	.080	.063	.404	.490	.312	-15L	-15CL	--
						-11L	-11CL	--
.375-16UNJC / -24UNJF	.125	.094	.498	.560	.375	-16L	-16CL	--
						-12L	-12CL	--

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1907

NUT, SELF-LOCKING, CLINCH (KNURLED COLLAR, MINIATURE 450°F)

APPLICABLE DOCUMENT: MIL-N-45938/7

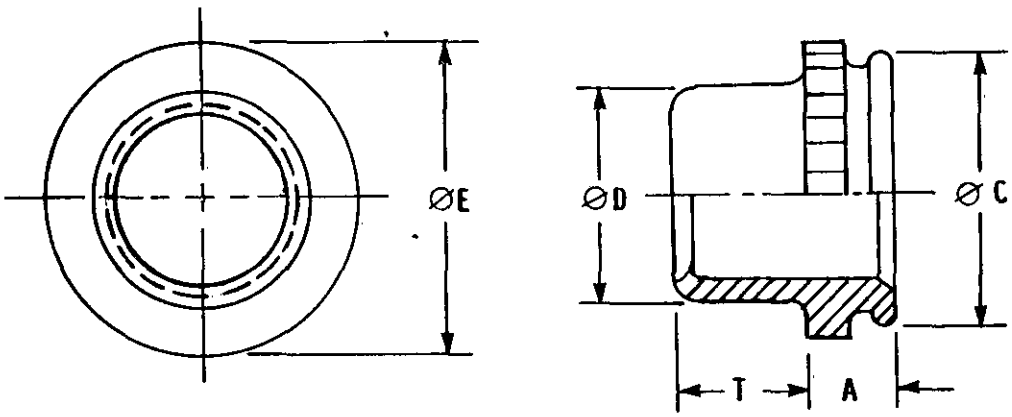


TABLE I

Material	CRES
Protective Finish	Passivate

Thread (-3B)	Sheet Thickness	A Max	ØC Max	ØD Max	ØE Nom	T Min	M45938/7 + Dash No.
.086-56UNJC	.019-.022 / .030-.036	.020 / .031	.143	.104	.160	.065	-01 / -02
.112-40UNJC	.040 Min / .060 Min	.040 / .060	.171	.145	.192	.065	-1 / -2
.138-32UNJC	.040 Min / .060 Min	.040 / .060	.212	.175	.244	.075	-3 / -4
.164-32UNJC	.040 Min / .060 Min	.040 / .060	.289	.215	.322	.090	-5 / -6
.190-32UNJF	.040 Min / .060 Min	.040 / .060	.289	.245	.322	.110	-7 / -8
.250-28UNJF / .250-20UNJC	.060 Min	.060	.343	.318	.384	.120	-9 / -10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1908

NUT, SELF-LOCKING, CLINCH (KNURLED SHANK, 250°F)

APPLICABLE DOCUMENT: MIL-N-45938/8

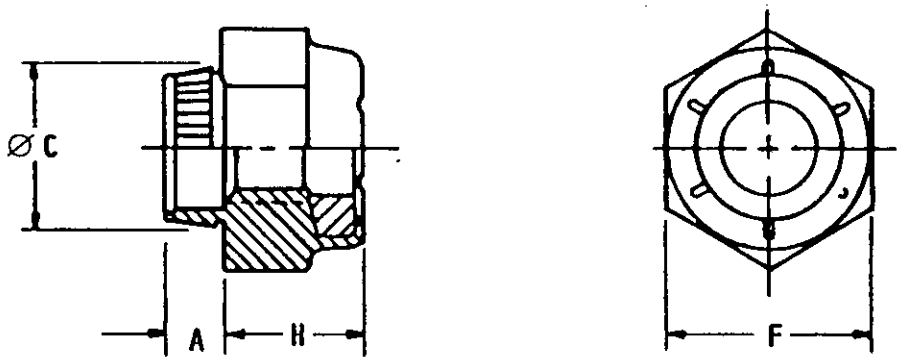


TABLE I


Material						Carbon Steel	Aluminum Alloy	CRES
Protective Finish						Cadmium Plate	Anodize	Passivate
Thread (-3B)	Sheet Thickness	A Nom	Ø C Nom	F Nom	H Nom	M45938/8 + Dash No.		
.112-40 UNJC	.020-.031	.063	.189	.250	.141	-10	-10A	-10C
	.032-.053	.085				-1	-1A	-1C
	.054-.073	.105				-11	-11A	-11C
.138-32 UNJC	.020-.031	.063	.222	.312	.188	-20	-20A	-20C
	.032-.053	.085				-21	-21A	-21C
	.054-.073	.105				-2	-2A	-2C
	.074-.103	.135				-3	-3A	-3C
	.104-.133	.165				-30	-30A	-30C
	.134-.163	.195				-31	-31A	-31C
.164-32 UNJC	.032-.053	.085	.275	.375	.250	-32	-32A	-32C
	.054-.073	.105				-33	-33A	-33C
	.074-.103	.135				-34	-34A	-34C
	.104-.133	.165				-35	.35A	-35C
	.134-.163	.195				-36	-36A	-36C
.190-24 UNJC	.074-.103	.135	.275	.375	.250	-4	-4A	-4C
	.104-.133	.165				-5	-5A	-5C
	.134-.163	.195				-50	-50A	-50C
.250-20 UNJC	.104-.133	.165	.359	.438	.313	-6	-6A	-6C
	.134-.163	.195				-7	-7A	-7C


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1909

NUT, SELF-LOCKING, CLINCH (KNURLED SHANK, MINIATURE, 250°F)

APPLICABLE DOCUMENT: MIL-N-45938/5

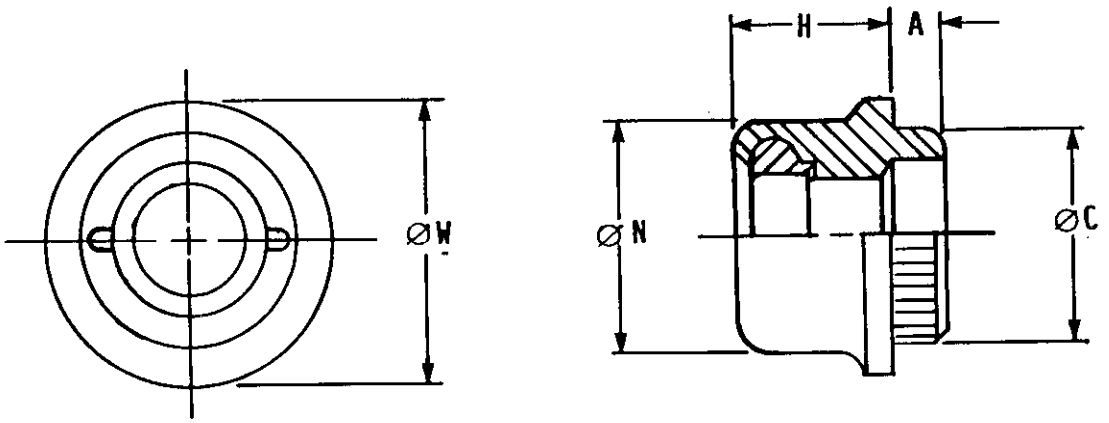



OPTIONAL CONFIGURATION

TABLE 1

Material								Carbon Steel	CRES
Protective Finish								Cadmium Plate	Passivate
Thread (-3B)	Sheet Thickness	A Nom	Ø C Nom	F Nom	H Nom	Ø N Max	Ø W Nom	M45938/5 + Dash no.	
.086-56UNC	.030 - .045 / .046 - UP	.040 / .060	.129	.156	.075	.150	.172	-1 / -2	-1C / -2C
.112-40UNC	.030 - .045 / .046 - UP	.040 / .060	.160	.187	.090	.182	.203	-3 / -4	-3C / -4C
.138-32UNC	.030 - .045 / .046 - UP	.040 / .060	.192	.238	.130	.242	.281	-5 / -6	-5C / -6C
.164-32UNC	.046 - UP	.060	.223	.281	.160	.268	.312	-7	-7C
.190-32UNF	.046 - UP	.060	.254	.328	.179	.287	.344	-8	-8C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1910
NUT, SELF-LOCKING, CLINCH (KNURLED SHANK, MINIATURE, 450°F)

APPLICABLE DOCUMENT: MIL-N-45938/6

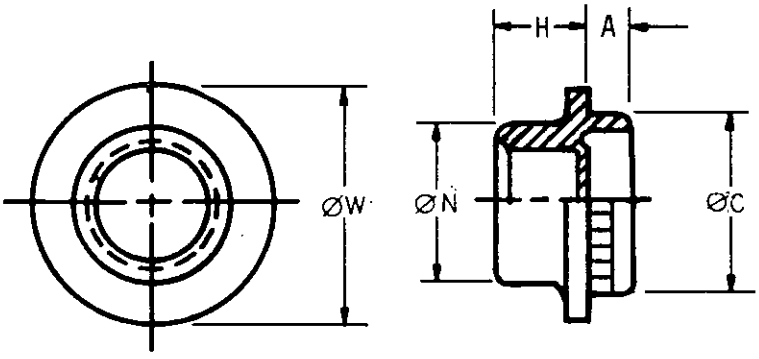


TABLE I


Material							Carbon steel	CRES
Protective finish							Cadmium plate	Passivate
Thread (-3B)	Sheet thickness	A Nom	Ø C Nom	H Nom	Ø N Nom	Ø W Nom	M45938/6 + Dash no.	
.086-56UNC	.030-.049	.040	.129	.085	.099	.156	-1	-1C
	.050-UP	.060					-2	-2C
.112-40UNC	.030-.049	.040	.160	.112	.133	.203	-3	-3C
	.050-UP	.060					-4	-4C
.138-32UNC	.030-.049	.040	.192	.120	.163	.234	-5	-5C
	.050-UP	.060					-6	-6C
.164-32UNC	.030-.049	.040	.223	.120	.188	.281	-7	-7C
	.050-UP	.060					-8	-8C
.190-32UNF	.030-.049	.040	.254	.120	.212	.328	-9	-9C
	.050-UP	.060					-10	-10C
.250-28UNF	.030-.049	.040	.316	.214	.287	.391	-11	-11C
	.050-UP	.060					-12	-12C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1911

NUT, SELF-LOCKING, CLINCH (KNURLED SHANK, SWAGE-CLINCHING 250°F UNJF-3B)

APPLICABLE DOCUMENT: MIL-N-45938/9

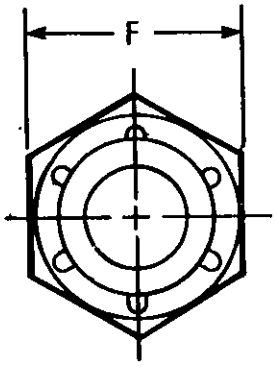

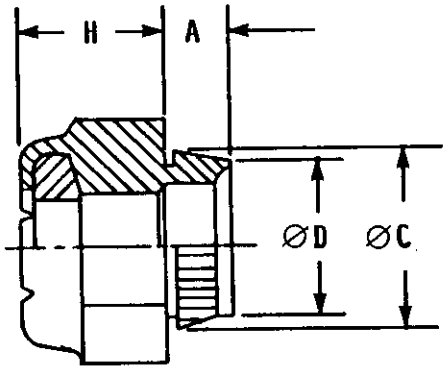


TABLE I

Material							CRES	Al Alloy	Steel
Protective Finish							Passi-vate	Anodize	Cadmium Plate
Thread (-3B)	Sheet Thickness	A Nom	ØC Nom	ØD Max	F Nom	H Nom	M45938/9 + Dash no.		
.164-36UNJF	.032-.053	.085	.275	.267	.375	.250	-1	-1A	1G
.190-32UNJF	.032-.053	.085	.275	.267	.375	.250	-20	-20A	-20G
	.054-.073	.105					-2	-2A	-2G
	.074-.103	.135					-21	-21A	-21G
	.104-.133	.165					-22	-22A	-22G
	.134-.163	.195					-23	-23A	-23G
.250-28UNJF	.074-.103	.135	.359	.351	.438	.313	-3	-3A	-3G
	.104-.133	.165					-4	-4A	-4G
	.134-.163	.195					-5	-5A	-5G
.3125-24UNJF	.074-.103	.135	.416	.407	.500	.344	-6	-6A	-6G
	.104-.133	.165					-7	-7A	-7G
	.134-.163	.195					-8	-8A	-8G

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 1912
NUT, SELF-LOCKING, CLINCH, ROUND

APPLICABLE DOCUMENT: MIL-N-45938/10

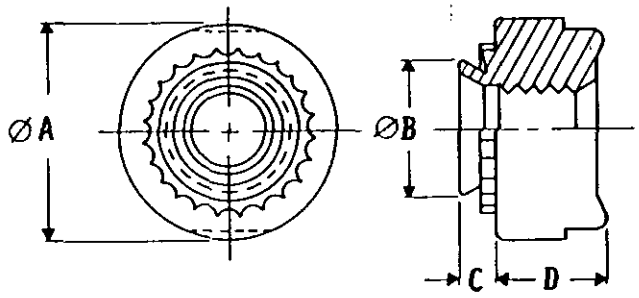


TABLE I

Material ----------					Carbon Steel
Protective Finish ----------					Cadmium Plate
Thread (-2B)	ØA Nom	ØB Max	C Max	D Nom	M45938/10 + Dash No.
.250-20UNC	.500	.343	.058	.189	-1L
.3125-18UNC	.575	.412	.058	.240	-2L
.375-16UNC	.650	.449	.058	.300	-3L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2001

NUT, SELF—LOCKING, DOUBLE HEXAGON

APPLICABLE DOCUMENT: MS9767

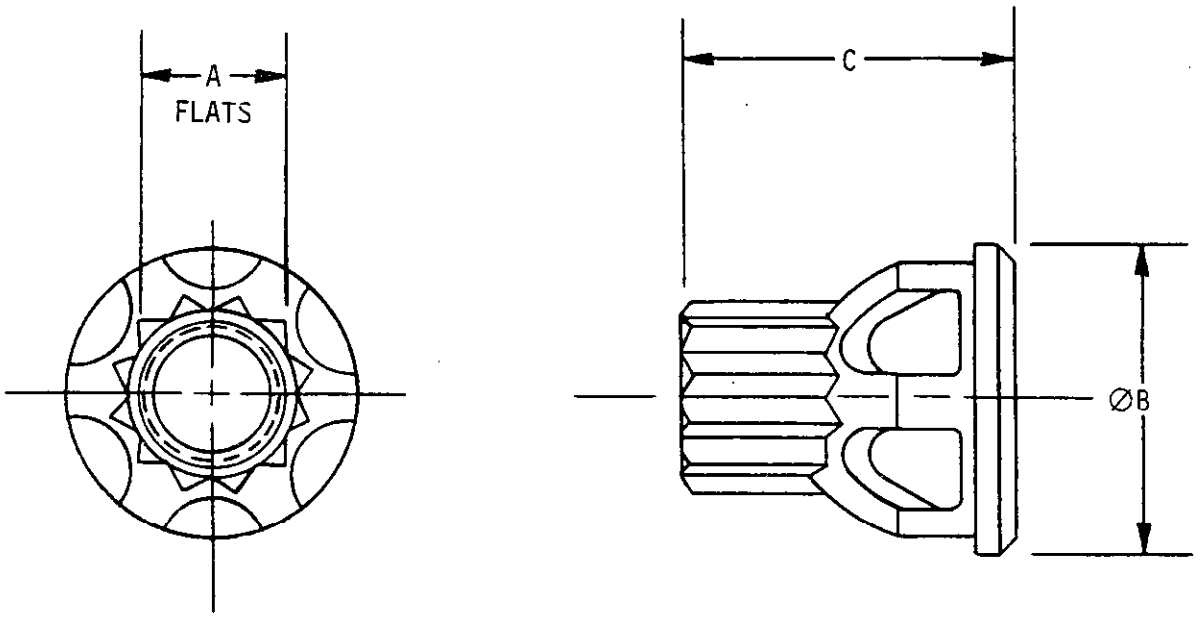


TABLE I

Material	Steel
Protective finish	Cadmium plate
Rockwell hardness	C26-32

Thread	A Nom	ØB Max	C Nom	MS9767 + Dash no.
.190-32UNJF-3B	.2500	.375	.277	-09
.250-28UNJF-3B	.3125	.438	.329	-10
.3125-24UNJF-3B	.3750	.500	.352	-11
.3750-24UNJF-3B	.4375	.562	.384	-12

NOTE: To be used with MS9880 Cupwashers

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2101

NUT, SELF-LOCKING, EXTENDED WASHER, HEXAGON 450°F AND 800° F

APPLICABLE DOCUMENTS: MS21042, MS21043, MS51988, NAS1291

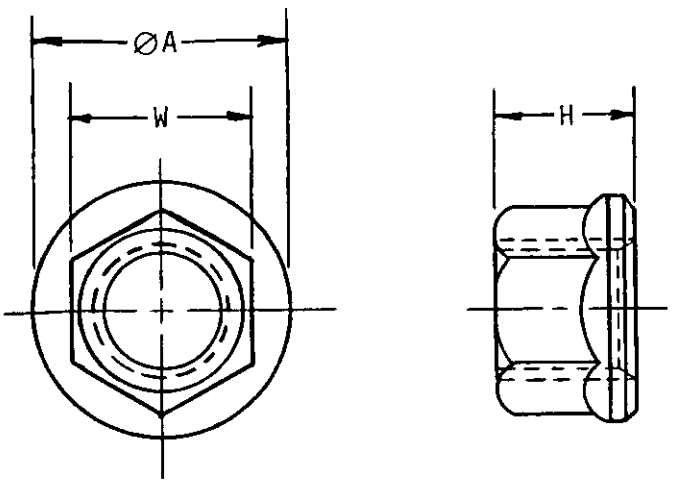


TABLE I

Material	Steel 1/		CRES
Protective finish	Cadmium plate		Silver plate
Lubricant	Non-dry	Dry	Non-dry
Performance: Temperature	450°F		800°F

Thread (-3B)	ØA Max	H Max	W Nom	MS21042 + Dash no.		MS21043 + Dash no.
.086-56UNJC	.167	.100	.125	-02	L02	--
.112-40UNJC	.206	.125	.156	-04	L04	-04
.138-32UNJC	.244	.141	.188	-06	L06	-06
.164-32UNJC	.290	.188	.219	-08	L08	-08
.190-32UNJF	.330		.250	-3	L3	-3
.250-28UNJF	.420	.219	.312	-4	L4	-4
.3125-24UNJF	.520	.266	.375	-5	L5	-5
.375-24UNJF	.620	.282	.438	-6	L6	-6

1/ Hardness: Rockwell C49 Maximum

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE II

Material ----------		Steel			
Protective finish ---		Cadmium plate			
Thread (-28)		ØA Max	H Max	W Nom	MS51988 + Dash no.
.190	24UNC 32UNF	.500	.244	.375	-1 -2
.250	20UNF 28UNF	.560	.300	.438	-3 -4
.3125	18UNC 24UNF	.680	.365	.500	-5 -6
.375	16UNC 24UNF	.810	.425	.562	-7 -8
.4375	14UNC 20UNF	.930	.495	.688	-9 -10
.500	13UNC 20UNF	1.070	.555	.750	-11 -12

TABLE III


Material ----------				Steel		CRES	
Protective finish ----------				Cadmium Plate Dry Film		Dry Film	Silver Plate
Performance: Temperature				450°F		450°F	800°F
Thread:	ØA Max	H Max	W Nom	NAS 1291 +		Dash no.	
.0860-56 UNJC-3B	.167	.100	.125	-	-	C02M	C02
.1120-40 UNJC-3B	.206	.125	.156	-	-	C04M	-
.1380-32 UNJC-3B	.244	.141	.188	-	-	C06M	-
.1640-32 UNJC-3B	.290	.188	.219	-	-	C08M	-
.1900-32 UNJF-3B	.330	.188	.250	-	-	C3M	-
.2500-28 UNJF-3B	.420	.219	.312	-	-	C4M	-
.3125-24 UNJF-3B	.520	.266	.375	-	-	C5M	-
.3750-24 UNJF-3B	.620	.282	.438	-	-	C6M	-
.4375-20 UNJF-3B	.708	.328	.500	-7	X7	C7M	-
.5000-20 UNJF-3B	.814	.410	.562	-8	X8	C8M	-
.5625-18 UNJF-3B	.912	.480	.688	-9	X9	C9M	-
.6250-18 UNJF-3B	1.014	.550	.750	-10	X10	C10M	C10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2201

NUT, SELF-LOCKING, GANG CHANNEL, FLOATING, 250°F, 450°F, 800°F

APPLICABLE DOCUMENTS: MS21063, MS21064, MS21065, MS21066, MS21067, MS21068, MS21079

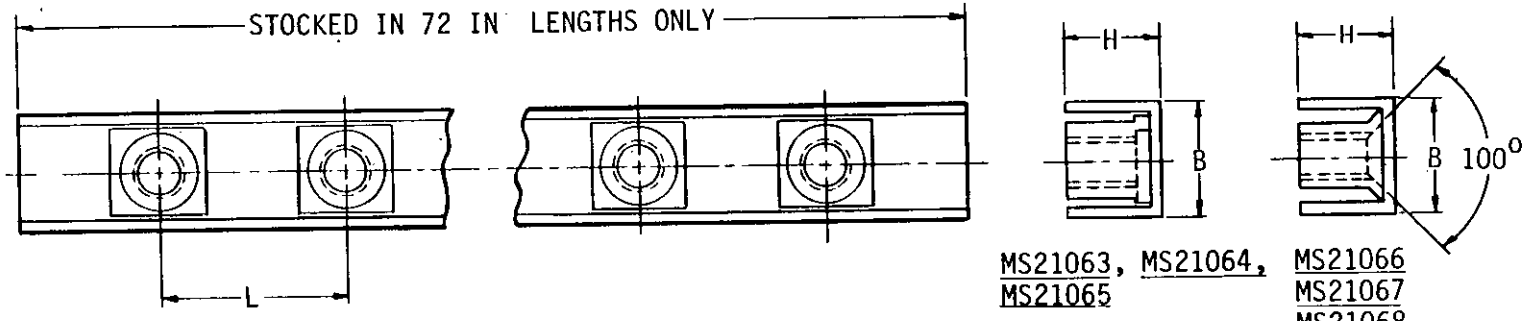

MS21063, MS21064, MS21065

MS21066
MS21067
MS21068
MS21079

TABLE I

Material: Nuts	Steel								CRES				Steel
Material: Channel	Aluminum alloy				CRES								Al alloy
Protective finish: Nut element	Cadmium plate								Passivate		Silverplate		Passivate		Silverplate		Cd pl
Protective finish: Channel	None specified						Passivate										None
Lubricant: Film	Dry		None		Dry		None		Dry		None		Dry		None		None
Performance: Temperature	250°F				450°F				450°F		800°F		450°F		800°F		250°F
Rockwell hardness (max): Nut element	C49																C-36

Thread Class (-3B)	B Max	H Max	L Min	MS21603 + Dash no.		MS21066 + Dash no.		MS21064 + Dash no.		MS21067 + Dash no.		MS21065 + Dash no.		MS21068 + Dash no.		MS21079 + Dash no.
.164-32UNJC	.416 .593 .422	.250 .272 .312	.625 .750 .625	L08 -- --	-08 -- --	-- L08 --	-- -08 --	L08 -- --	-08 -- --	-- L08 --	-- -08 --	L08 -- --	-08 -- --	-- L08 --	-- -08 --	-- -- -08
.190-32UNJF	.416 .593 .422	.250 .281 .318	.625 .750 .625	L3 -- --	-3 -- --	-- L3 --	-- -3 --	L3 -- --	-3 -- --	-- L3 --	-- -3 --	L3 -- --	-3 -- --	-- L3 --	-- -3 --	-- -- -3
.250-28UNJF	.516 .874 .518	.281 .340 .393	.750 1.000 .750	L4 -- --	-4 -- --	-- L4 --	-- -4 --	L4 -- --	-4 -- --	-- L4 --	-- -4 --	L4 -- --	-4 -- --	-- L4 --	-- -4 --	-- -- -4
.3125-24UNJF	.609 .648	.328 .387	.875 .750	L5 --	-5 --	-- --	-- --	L5 --	-5 --	-- --	-- --	L5 --	-5 --	-- --	-- --	-- -5
.375-24UNJF	.726	.344 .479	1.000	L6 --	-6 --	-- --	-- --	L6 --	-6 --	-- --	-- --	L6 --	-6 --	-- --	-- --	-- -6

NOTE: Nut element, steel with non-metallic insert (nylon or equivalent)

TABLE II

"L", Nut element spacing	Nut element spacing Dash no.	Max No. of nut elements
.625 .750 .875	-5 1/ -6 -7	115 96 82
1.000 1.125 1.250	-8 -9 -10	72 64 57
1.375 1.500 1.625	-11 -12 -13	52 48 44
1.750 1.875 2.000	-14 -15 -16	41 38 36
2.250 2.500 3.000	-18 -20 -24	32 28 24

1/ Not available for MS21066, MS21067, and MS21068.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2301
NUT, SELF-LOCKING, HEXAGON

APPLICABLE DOCUMENTS: MS16228, MS17828, MS17829, MS17830, MS20500, MS21044, MS21045, MS21046, MS21083, MS21245, MS51922, MS51943

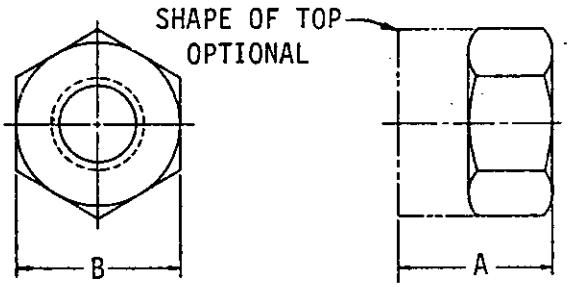


TABLE I

Material			Aluminum alloy 1/	Steel 1/	Copper 1/ base alloy	CRES 1/	Steel		CRES	
Protective			Anodize	Cadmium plate		Passivate	Cadmium plate		Passivate	Silver plate
Lubricant			--	--	--	--	Soluble	Dry	--	--
Thread (-3B)	A Max	B Nom	MS21044 + Dash no.				MS21045 + Dash no.			MS20500 + Dash no.
.112-40UNJC	.157	.250	D04	N04	B04	C04	-04	L04	C04	--
.138-32UNJC	.188	.312	D06	N06	B06	C06	-06	L06	C06	--
.164-32UNJC	.250	.344	--	--	--	--	-08	L08	C08	--
	.281		D08	N08	B08	C08	--	--	--	--
.190-32UNJF	.250	.375	--	--	--	--	-3	L3	C3	-1032
	.281		D3	N3	B3	C3	--	--	--	--
.250-28UNJF	.328	.438	--	--	--	--	-4	L4	C4	-428
	.360		D4	N4	B4	C4	--	--	--	--
.3125-24UNJF	.360	.500	D5	N5	B5	C5	-5	L5	C5	-524
.375-24UNJF	.469	.562	D6	N6	B6	C6	-6	L6	C6	-624
.4375-20UNJF	.469	.688	D7	N7	B7	C7	-7	L7	C7	--
			--	--	--	--	--	--	--	-7709
.500-20UNJF	.610	.750	D8	N8	B8	C8	-8	L8	C8	-820
.625-18UNJF	.766	.938	D10	N10	B10	C10	-10	L10	C10	--
			--	--	--	--	--	--	--	-1018
.750-16UNJF	.891	1.062	D12	N12	B12	C12	-12	L12	C12	-1216
.875-14UNJF	1.016	1.250	D14	N14	B14	C14	-14	L14	C14	-1414
1.00-12UNJF	1.141	1.438	D16	N16	B16	C16	-16	L16	C16	-1612
1.125-12UNJF	1.266	1.625	D18	N18	B18	C18	-18	L18	C18	--
1.25-12UNJF	1.454	1.812	--	--	--	--	-20	L20	C20	--
			D20	N20	B20	C20	--	--	--	--

1/ Non-metallic insert

TABLE II. Shear applications.

Material			Aluminum alloy 1/	Copper base alloy 1/	CRES 1/	Steel 1/		
Protective finish			Anodize	Cadmium plate	None specified	Cadmium plate		
Rockwell hardness			None specified			C35 Max	C46 Max	
Lubricant			--	--	--	--	Non-dry	Dry
Thread size (-3B)	A Max	B Nom	MS21083 + Dash no.				MS21245 + Dash no.	
.112-40UNJC	.125	.250	D04	B04	C04	N04	--	--
.138-32UNJC	.141	.312	D06	B06	C06	N06	--	--
.164-32UNJC	.188	.344	D08	B08	C08	N08	--	--
.190-32UNJF		.375	D3	B3	C3	N3	--	--
.250-28UNJF	.219	.438	D4	B4	C4	N4	--	--
.3125-24UNJF	.266	.500	D5	B5	C5	N5	--	--
.375-24UNJF	.282	.562	D6	B6	C6	N6	--	--
.4375-20UNJF	.328	.688	D7	B7	C7	N7	-7	-L7
.500-20UNJF		.750	D8	B8	C8	N8	-8	-L8
.625-18UNJF	.407	.938	D10	B10	C10	N10	-10	-L10
.750-16UNJF	.422	1.062	D12	B12	C12	N12	-12	-L12
.875-14UNJF	.485	1.250	D14	B14	C14	N14	-14	-L14
1.000-12UNJF	.578	1.438	D16	B16	C16	N16	-16	-L16
1.125-12UNJF	.672	1.625	D18	B18	C18	N18	-18	-L18
			--	--	--	--	-20	-L20
1.250-12UNJF	.766	1.812	D20	B20	C20	N20	--	--
1.375-12UNJF	.821	2.000	--	--	--	--	-22	-L22
	.828		D22	B22	C22	N22	--	--
1.500-12UNJF		2.188	D24	B24	C24	N24	--	--
	.884		--	--	--	--	-24	-L24

1/ Non-metallic insert

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE III

Material			Steel 1/	CRES 1/		CRES	Nickel-Copper alloy 1/
Protective finish			None specified	Passivate		Silver plate	None specified
Tensile strength (ultimate)			None specified			125 ksi	
Performance: Temp			250°F			800°F	250°F
Thread size (-3B)	A Max	B Nom	MS17829 + Dash no.	MS17830 + Dash no.	MS16228 + Dash no.	MS21046 + Dash no.	MS17828 + Dash no.
.112-40UNC	.157	.250	--	-04C	--	C04	-04C
.138-32UNC	.188	.312	--	-06C	--	C06	-06C
.164-32UNC	.250	.344	--	--	--	C08	--
	.281		--	-08C	--	--	-08C
.190-24UNC	.281	.375	-3C	-3C	--	--	-3C
.190-32UNF	.250		--	--	--	C3	-3F
.250-20UNC	.360	.438	-4C	-4C	--	--	-4C
	.296	.500	--	--	-4C	--	--
.250-28UNF	.360	.438	-4F	--	--	--	-4F
	.328		--	--	--	C4	--
.3125-18UNC	.328	.562	--	--	-5C	--	--
	.360	.500	-5C	-5C	--	--	-5C
.3125-24UNF	.360	.500	-5F	--	--	C5	-5F
.375-16UNC	.469	.562	-6C	-6C	--	--	-6C
	.421	.688	--	--	-6C	--	--
.375-24UNF	.469	.562	-6F	--	--	C6	-6F
.4375-14UNC	.469	.688	-7C	-7C	--	--	-7C
	.453	.750	--	--	-7C	--	--
.4375-20UNF	.469	.688	-7F	--	--	C7	-7F
.500-13UNC	.610	.750	-8C	-8C	--	--	-8C
	.546	.875	--	--	-8C	--	--
.500-20UNF	.610	.750	-8F	--	--	C8	-8F
.625-11UNC	.766	.938	-10C	-10C	--	--	-10C
	.624	1.062	--	--	-10C	--	--
.625-18UNF	.766	.938	-10F	--	--	C10	-10F
.750-10UNC	.891	1.062	-12C	-12C	--	--	-12C
	.718	1.250	--	--	-12C	--	--
.750-16UNF	.891	1.062	-12F	--	--	C12	-12F
.875-9UNC	1.016	1.250	-14C	-14C	--	--	-14C
.875-14UNF	1.016		-14F	--	--	C14	-14F
1.000-8UNC	1.141	1.438	-16C	-16C	--	--	-16C
	.922	1.625	--	--	-16C	--	--
1.000-12UNF	1.141	1.438	--	--	--	C16	-16F
1.125-7UNC	1.266	1.625	-18C	-18C	--	--	-18C
1.125-12UNF	1.266		-18F	--	--	--	-18F
1.250-7UNC	1.454	1.812	-20C	-20C	--	--	-20C
1.250-12UNF	1.454		--	--	--	C20	-20F
1.375-6UNC	1.609	2.000	-22C	-22C	--	--	-22C
1.375-12UNF	1.609		-22F	-22F	--	--	-22F
1.500-6UNC	1.640	2.188	-24C	-24C	--	--	-24C
1.500-12UNF	1.640		-24F	-24F	--	--	-24F
1.750-5UNC	2.376	2.766	-28C	-28C	--	--	-28C
2.000-4.5UNC	2.469	3.141	-32C	-32C	--	--	-32C
2.250-4.5UNC	2.876	3.516	-36C	-36C	--	--	-34C
2.500-4UNC	3.204	4.016	-40C	-40C	--	--	-40C

1/ Non-metallic insert

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE IV

Material ----------				Carbon Steel	CRES	Brass	Aluminum alloy
Protective finish ----------				Cadmium plate	Passivate	Uncoated	Anodize
Thread (-2B)		A Max	B Nom	MS51922 + Dash no.			
.250	20UNC	.328	.438	-1	-2	--	--
	28UNF			-5	-6	-7	-8
.3125	18UNC	.359	.500	-9	--	-11	--
	24UNF			-13	-14	-15	-16
.375	16UNC	.469	.562	-17	-18	-19	--
	24UNF			-21	-22	-23	-24
.500	13UNC	.609	.750	-33	--	--	--
	20UNF			-37	-38	-39	-40
.625	11UNC	.765	.938	-49	--	-51	--
	18UNF			-53	-54	-55	-56
.750	10UNC	.890	1.125	-57	--	-59	--
	16UNF			-61	-62	-63	-64
1.000	8UNC	1.124	1.500	-72	--	-74	--
	12UNF			-76	-77	-78	-79
1.125	7UNC	1.281	1.688	-80	--	--	--
	12UNF			-81	--	--	--
1.250	7UNC	1.422	1.875	-82	--	--	--
	12UNF			-83	--	--	--
1.500	6UNC	1.671	2.250	-85	--	--	--
	12UNF			-86	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE V

Material ----------				Steel	
Protective finish ----------				Cadmium plate	Phosphate coat
Thread (-3B)		A Max	B Nom	MS51943 + Dash no.	
.250	20UNC	.328	.438	-31	-1
	28UNF			-32	-2
.3125	18UNC	.359	.500	-33	-3
	24UNF			-34	-4
.375	16UNC	.469	.562	-35	-5
	24UNF			-36	-6
.500	13UNC	.609	.750	-39	-9
	20UNF			-40	-10
.625	11UNC	.765	.938	-43	-13
	18UNF			-44	-14
.750	10UNC	.890	1.125	-45	-15
	16UNF			-46	-16
1.000	8UNC	1.124	1.500	-49	-19
	12UNF			-50	-20
1.125	7UNC	1.281	1.688	-51	--
	12UNF			-52	--
1.250	7UNC	1.422	1.875	-53	--
	12UNF			-54	--
1.500	6UNC	1.671	2.250	-56	--
	12UNF			-57	--

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2401

NUT, SELF-LOCKING, PLATE, CORNER, 125 ksi Ftu

APPLICABLE DOCUMENTS: MS21055, MS21056, MS21057, MS21058, MS21073, MS21074

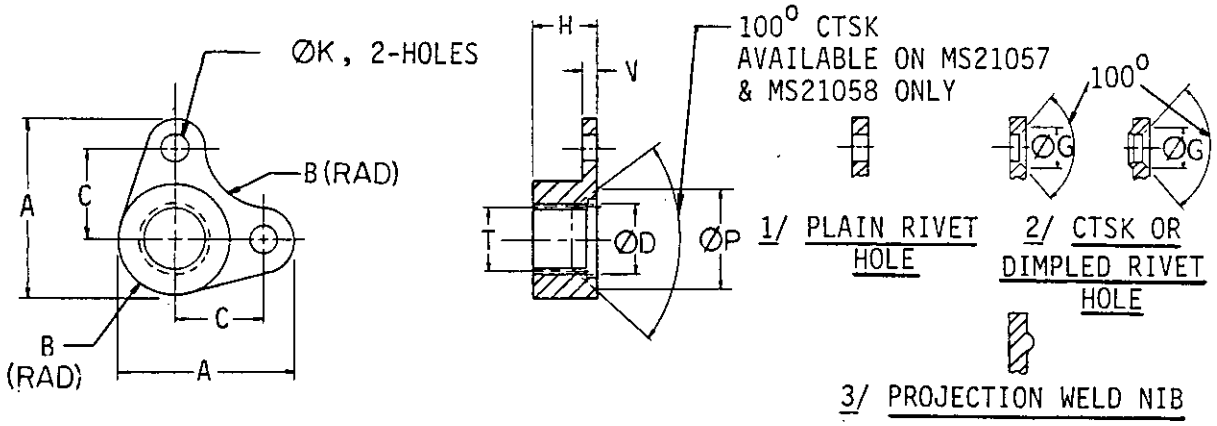


TABLE I

Material / Protective finish / Performance: Temperature / Mounting configuration / Lubricant										Steel alloy								Steel			
										Cadmium plate											
										450°F											
										1/		2/		1/		2/		1/		2/	
										Non dry	Dry	Non dry	Dry	Non dry	Dry	Non dry	Dry	Non dry	Dry	Non dry	Dry
T Thread	A Max	B Min	C	ØD Min	ØG	H Max	ØK Min	ØP Max	V Max	MS21055 + Dash no.				MS21057 + Dash no.				MS21073 + Dash no.			
.086-56UNJC-3B	.288	.081	.125	--	--	.110	.066	.130	.035	--	--	--	--	--	--	--	--	-02	L02	--	--
.112-40UNJC-3B	.448	.096	.203	--	.200	.143	.098	.166	.040	--	--	--	--	--	--	--	--	-04	L04	-04K	L04K
.138-32UNJC-3B	.463 .637	.121 .108	.218 .344	--	.200	.171	.098	.206	.047	-- -06	-- L06	-- -06K	-- L06K	-- --	-- --	-- --	-- --	-06 --	L06 --	-06K --	L06K --
.164-32UNJF-3B	.497 .637 .700	-- .125 .180	.234 .344 .344	-- .168 --	-- .200 --	-- .250 .272	-- .098 --	-- .248 .370	-- .047 --	-- -08 --	-- L08 --	-- -08K --	-- L08K --	-- -- -08	-- -- L08	-- -- -08K	-- -- L08K	-- --	-- --	-- --	-- --
.190-32UNJF-3B	.526 .653 .716	.156 .145 .203	.250 .344 .344	-- .194 --	-- .200 --	-- .250 .281	-- .098 --	-- .274 .416	-- .047 --	-- -3 --	-- L3 --	-- -3K --	-- L3K --	-- -- -3	-- -- L3	-- -- -3K	-- -- L3K	-3 --	L3 --	-3K --	L3K --
.250-28UNJF-3B	.603 .852 .955	.200 .185 .267	.281 .500 .500	-- .254 --	-- .200 --	-- .291 .340	-- .098 --	-- .344 .545	-- .055 --	-- -4 --	-- L4 --	-- -4K --	-- L4K --	-- -- -4	-- -- L4	-- -- -4K	-- -- L4K	-4 --	L4 --	-4K --	L4K --
.3125-24UNJF-3B	.757 .914 1.044	.250 .216 .340	.359 .500 .500	-- .317 --	-- .230 --	-- .328 .422	-- .130 --	-- .417 .691	-- .065 --	-- -5 --	-- L5 --	-- -5K --	-- L5K --	-- -- -5	-- -- L5	-- -- -5K	-- -- L5K	-5 --	L5 --	-5K --	L5K --
.375-24UNJF-3B	.870 .968	.305 .290	.414 .500	-- --	-- --	.344	.130	.505	.075	-- -6	-- L6	-- --	-- --	-- --	-- --	-- --	-- --	-6 --	L6 --	-- --	-- --
.4375-20UNJF-3B	1.101	.340	.562	.442	--	.390	.161	.602	.085	-7	L7	--	--	--	--	--	--	--	--	--	--

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.


TABLE II


Material	Corrosion resisting steel																	
Protective finish	None specified			Silver plate			None specified			Silver plate			None specified			Silver plate		
Performance; Temperature				800°F			450°F			800°F			450°F			800°F		
Mounting configuration	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/
Lubricant	Dry			Non dry			Dry			Non dry			Dry			Non dry		
T Thread	MS21056 + Dash no.						MS21058 + Dash no.						MS21074 + Dash no.					
.086-56UNJC-3B	--	--	--	--	--	--	--	--	--	--	--	--	L02	--	L02W	-02	--	-02W
.112-40UNJC-3B	--	--	--	--	--	--	--	--	--	--	--	--	L04	L04K	L04W	-04	-04K	-04W
.138-32UNJC-3B	--	--	--	--	--	--	--	--	--	--	--	--	L06	L06K	L06W	-06	-06K	-06W
	L06	L06K	L06W	-06	-06K	-06W	--	--	--	--	--	--	--	--	--	--	--	--
.164-32UNJF-3B	--	--	--	--	--	--	--	--	--	--	--	--	L08	L08K	L08W	-08	-08K	-08W
	L08	L08K	L08W	-08	-08K	-08W	--	--	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	L08	L08K	L08W	-08	-08K	-08W	--	--	--	--	--	--
.190-32UNJF-3B	--	--	--	--	--	--	--	--	--	--	--	--	L3	L3K	L3W	-3	-3K	-3W
	L3	L3K	L3W	-3	-3K	-3W	--	--	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	L3	L3K	L3W	-3	-3K	-3W	--	--	--	--	--	--
.250-28UNJF-3B	--	--	--	--	--	--	--	--	--	--	--	--	L4	L4K	L4W	-4	-4K	-4W
	L4	L4K	L4W	-4	-4K	-4W	--	--	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	L4	L4K	L4W	-4	-4K	-4W	--	--	--	--	--	--
.3125-24UNJF-3B	--	--	--	--	--	--	--	--	--	--	--	--	L5	L5K	L5W	-5	-5K	-5W
	L5	L5K	L5W	-5	-5K	-5W	--	--	--	--	--	--	--	--	--	--	--	--
	--	--	--	--	--	--	L5	L5K	L5W	-5	-5K	-5W	--	--	--	--	--	--
.375-24UNJF-3B	--	--	--	--	--	--	--	--	--	--	--	--	L6	--	L6W	-6	--	-6W
	L6	--	L6W	-6	--	-6W	--	--	--	--	--	--	--	--	--	--	--	--
.4375-20UNJF-3B	L7	--	L7W	-7	--	-7W	--	--	--	--	--	--	--	--	--	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2402
NUT, SELF-LOCKING, PLATE, CORNER
125 ksi, Ftu, 250°F (NON-METALLIC INSERT)

APPLICABLE DOCUMENT: MS21081

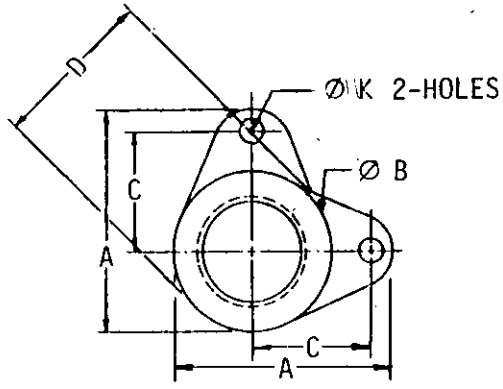

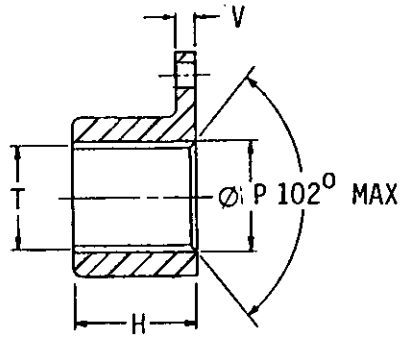

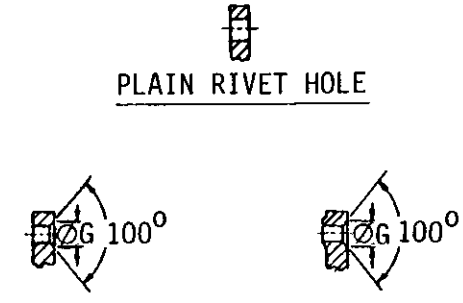


TABLE I

Material	Steel with non-metallic insert	
Protective finish	Cadmium plate	
Rockwell hardness	C32 Max	
Mounting configuration	Plain holes	CTSK or dimpled holes


T Thread	A Max	ØB Min	C	D Max	ØG	H Max	ØK Min	ØP Max	V Max	MS21081 + Dash no.	
.138 -32UNJC-3B	.703	.375	.344	.531	.200	.234	.098	.177	.075	-06	06K
.164 -32UNJC-3B	.703	.375	.344	.531	.200	.297	.098	.230	.075	-08	08K
.190 -32UNJF-3B	.703	.375	.344	.531	.200	.312	.098	.230	.075	-3	3K
.250 -28UNJF-3B	.906	.484	.500	.600	.200	.375	.098	.293	.075	-4	4K
.3125-24UNJF-3B	.937	.500	.500	.625	.230	.375	.130	.356	.075	-5	5K
.375 -24UNJF-3B	1.008	.609	.500	.718	.230	.453	.130	.418	.075	-6	6K
.4375-20UNJF-3B	1.125	.672	.562	.782	--	.469	.161	.487	.115	-7	--
.500-20UNJF-3B	1.234	.796	.625	.874	--	.609	.161	.550	.115	-8	--
.625-18UNJF-3B	1.437	.964	.750	1.010	--	.765	.161	.676	.115	-10	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2403

NUT, SELF-LOCKING, PLATE, CORNER, 160 KSI FTU

APPLICABLE DOCUMENTS: NAS 1772, NAS 1777, NAS 1782

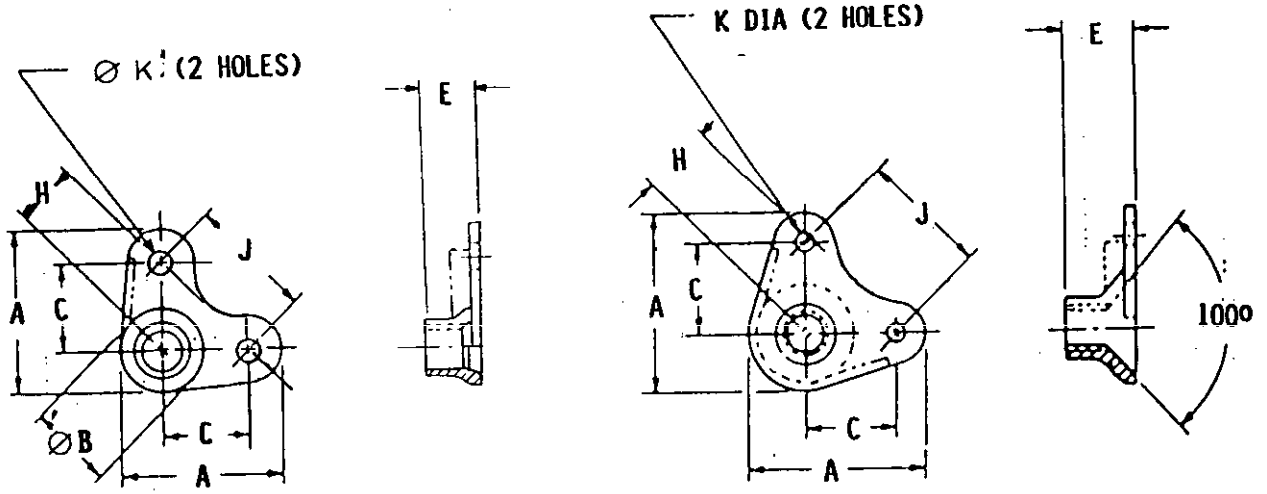

NAS 1772 NAS 1777 NAS 1782

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT-WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	W-SUFFIX

TABLE I

DOCUMENT	Material	Steel	CRES	
	Protective Finish	Cadmium Plate + Dry Film	Silver Plate w/o Dry Film	Dry Film
	Performance Temperature	450°F	800°F	450°F

DOCUMENT	Thread (-3B)	A Max	ØB Max	C Nom	E Max	H Max	J Nom	ØK Min	Dash Numbers			
NAS 1772	.1380-32UNJC	.637	.265	.344	.171	.270	.486	.098	-06	X06	C06	C06M
	.1640-32UNJC	.637	.297	.344	.250	.270	.486	.098	-08	X08	C08	C08M
	.1900-32UNJF	.653	.328	.344	.250	.270	.486	.098	-3	X3	C3	C3M
	.2500-28UNJF	.852	.414	.500	.281	.383	.707	.098	-4	X4	C4	C4M
	.3125-24UNJF	.914	.505	.500	.328	.383	.707	.130	-5	X5	C5	C5M
	.3750-24UNJF	.968	.614	.500	.344	.383	.707	.130	-6	X6	C6	C6M
	.4375-20UNJF	1.101	.726	.562	.390	.427	.795	.161	-7	X7	C7	C7M
NAS 1777	.1120-40UNJC	.448	.260	.203	.143	.170	.287	.098	-04	X04	C04	C04M
	.1380-32UNJC	.462	.265	.218	.171	.186	.308	.098	-06	X06	C06	C06M
	.1640-32UNJC	.497	.297	.234	.250	.210	.331	.098	-08	X08	C08	C08M
	.1900-32UNJF	.526	.328	.250	.250	.215	.354	.098	-3	X3	C3	C3M
	.2500-28UNJF	.603	.414	.281	.281	.233	.398	.098	-4	X4	C4	C4M
	.3125-24UNJF	.757	.505	.359	.328	.280	.508	.130	-5	X5	C5	C5M
	.3750-24UNJF	.870	.614	.414	.344	.303	.585	.130	-6	X6	C6	C6M
NAS 1782	.1640-32UNJC	.700	----	.344	.272	.270	.486	.098	-08	X08	C08	C08M
	.1900-32UNJF	.716	----	.344	.281	.270	.486	.098	-3	X3	C3	C3M
	.2500-28UNJF	.955	----	.500	.340	.383	.707	.098	-4	X4	C4	C4M
	.3125-24UNJF	1.044	----	.500	.422	.383	.707	.130	-5	X5	C5	C5M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2404

NUT, SELF-LOCKING, PLATE, CORNER FLOATING, 125 KSI FTU

APPLICABLE DOCUMENT: NAS 1766

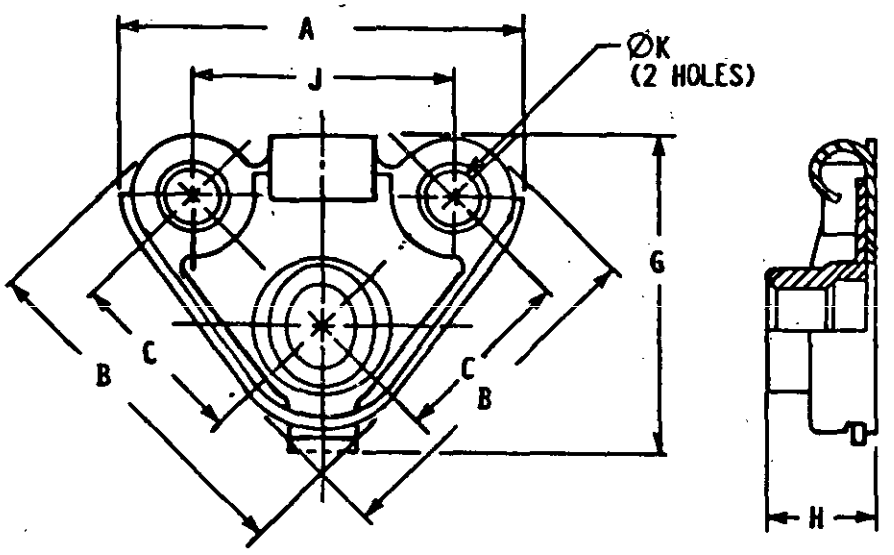


TABLE I


Material								Steel	CRES	
Protective Finish								Cadmium Plate + Dry Film	Silver Plate	Dry Film
Performance Temperature								450°F	800°F	450°F
Thread (-3B)	A Max	B Max	C Nom	G Max	H Max	J Nom	ØK Min	NAS 1766 + Dash No.		
.164-32UNJC	.786	.680	.344	.680	.205	.486	.098	-08	C08	CL08
.190-32UNJF	.786	.680	.344	.680	.205	.486	.098	-3	C3	CL3
.250-28UNJF	1.007	.889	.500	.875	.282	.707	.098	-4	C4	CL4
.3125-24UNJF	1.094	1.058	.500	.875	.325	.707	.130	-5	C5	CL5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2405

NUT, SELF-LOCKING, PLATE, CORNER, FLOATING, REPLACEABLE NUT ELEMENT, 125 KSI, FTU

APPLICABLE DOCUMENT: NAS 1793

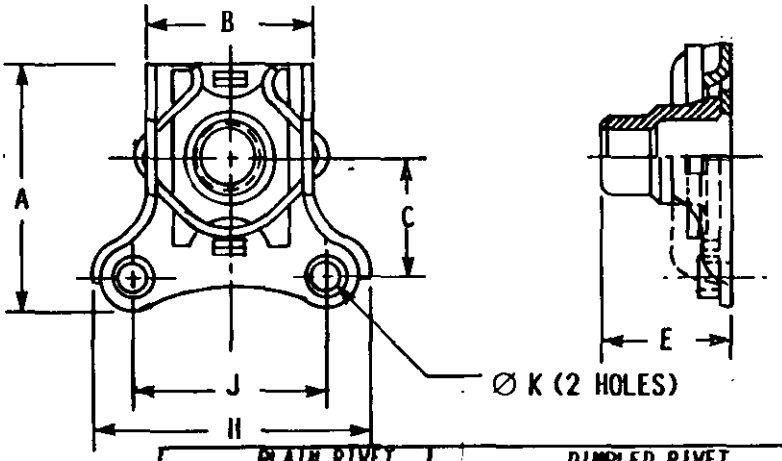

NOTE: "N" SUFFIXED TO DASH NUMBER INDICATES WITHOUT DRY FILM LUBRICANT.

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT- WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	M-SUFFIX

TABLE I

Material	Steel	CRES	
Protective Finish	Cadmium Plate	Passivate	Silver Plate
Performance Temperature	450°F	450°F	800°F


Thread (-3B)	A Max	B Max	C Nom	E Max	H Max	J Nom	Ø K Min	NAS 1793 + Dash No.		
.1900-32UNJF	.750	.445	.335	.250	.830	.486	.098	A3-1	C3-1	C3-1P
				.312				A3-2	C3-2	C3-2P
				.375				A3-3	C3-3	C3-3P
				.438				A3-4	C3-4	C3-4P
				.500				A3-5	C3-5	C3-5P
				.562				A3-6	C3-6	C3-6P
.2500-28UNJF	.900	.547	.375	.295	1.050	.707	.098	A4-1	C4-1	C4-1P
				.357				A4-2	C4-2	C4-2P
				.419				A4-3	C4-3	C4-3P
				.481				A4-4	C4-4	C4-4P
				.543				A4-5	C4-5	C4-5P
				.605				A4-6	C4-6	C4-6P
.3125-24UNJF	1.050	.643	.480	.344	1.100	.707	.130	A5-1	C5-1	C5-1P
				.400				A5-2	C5-2	C5-2P
				.461				A5-3	C5-3	C5-3P
				.524				A5-4	C5-4	C5-4P
				.586				A5-5	C5-5	C5-5P
				.649				A5-6	C5-6	C5-6P

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2406

NUT, SELF-LOCKING, PLATE, ONE-LUG, FLOATING, REPLACEABLE NUT ELEMENT, 125 KSI FTU

APPLICABLE DOCUMENT: NAS 1792

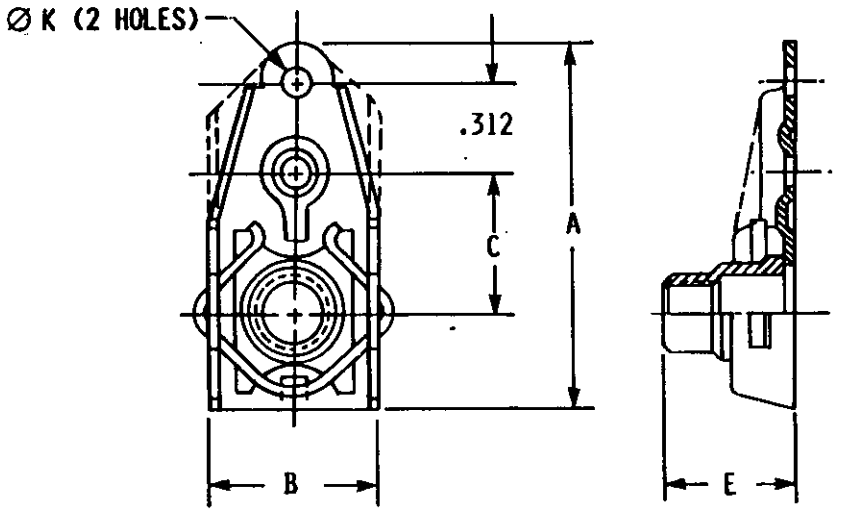

NOTE: "N" SUFFIXED TO DASH NUMBER INDICATES WITHOUT DRY FILM LUBRICANT.

MOUNTING CONFIGURATION CODES

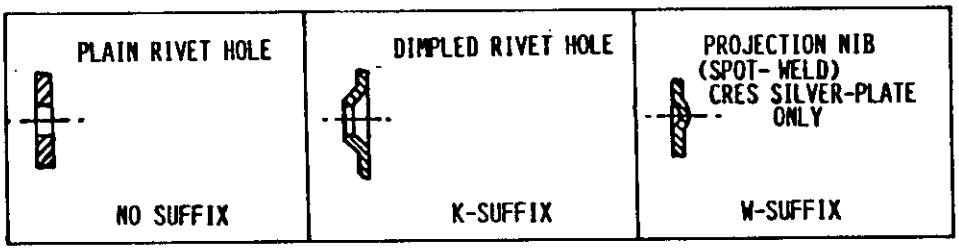


TABLE I

Material						Steel	CRES	
Protective Finish						Cadmium Plate	Pass-ivate	Silver Plate
Performance Temperature						450°F	450°F	800°F
Thread (-3B)	A Max	B Max	C Nom	E Max	ØK Min	NAS 1792 + Dash no.		
.1900-32UNJF	1.051	.445	.344	.250 .312 .375 .438 .500 .562	.098	A3-1 A3-2 A3-3 A3-4 A3-5 A3-6	C3-1 C3-2 C3-3 C3-4 C3-5 C3-6	C3-1P C3-2P C3-3P C3-4P C3-5P C3-6P
.2500-28UNJF	1.306	.547	.500	.295 .357 .419 .481 .543 .605	.098	A4-1 A4-2 A4-3 A4-4 A4-5 A4-6	C4-1 C4-2 C4-3 C4-4 C4-5 C4-6	C4-1P C4-2P C4-3P C4-4P C4-5P C4-6P
.3125-24UNJF	1.396	.643	.500	.344 .400 .461 .524 .586 .649	.130	A5-1 A5-2 A5-3 A5-4 A5-5 A5-6	C5-1 C5-2 C5-3 C5-4 C5-5 C5-6	C5-1P C5-2P C5-3P C5-4P C5-5P C5-6P

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2407

NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, 125 KSI FTU

APPLICABLE DOCUMENTS MS21051, MS21052, MS21053
MS21054 MS21071 MS21072

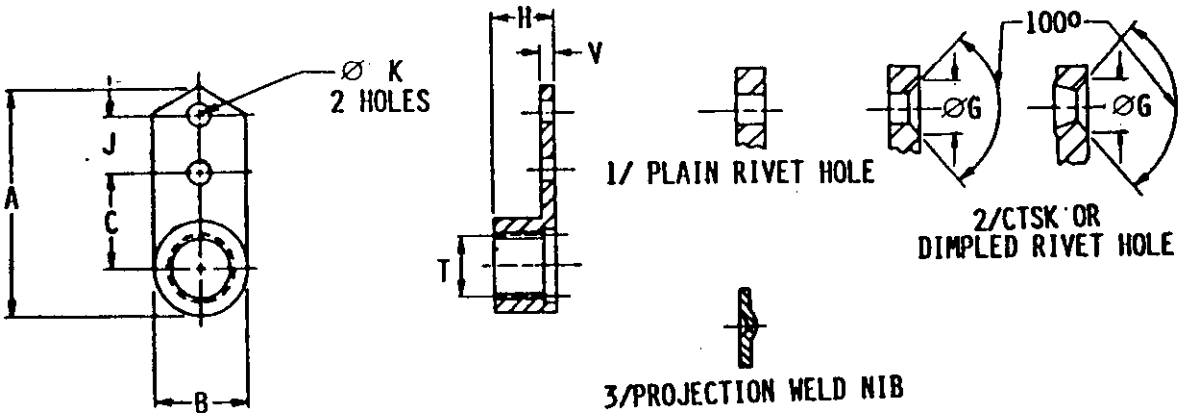


TABLE I

Material	Corrosion resistant steel																								
Protective finish	Silver plate			None specified			Silver plate			None specified			Silver plate												
Performance: temperature	800°F			450°F			800°F			450°F			800°F												
Mounting configuration	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	1/	2/	3/	
Lubricant: film	Soluble			Dry			Soluble			Dry			Soluble												
T Thread	A Max	B Min	C	ØG	J	H Max	ØK Min	V Max	MS21052 + Dash no.			MS21054 + Dash no.							MS21072 + Dash no.						
086-56UNJC-3B	.507	.140	.125	--	.219	.110	.066	.035	--	--	--	--	--	--	--	--	--	--	L02	--	L02W	-02	--	-02W	
086-56UNJC-3B	.935	.239	.344	.200	.312	.171	.098	.047	-02	-02K	-02W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.112-40UNJC-3B	.667	.140	.203	.200	.219	.143	.098	040	--	--	--	--	--	--	--	--	--	--	L04	L04K	L04W	-04	-04K	-04W	
.112-40UNJC-3B	.935	.239	.344	.200	.312	.171	.098	.047	-04	-04K	-04W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.138-32UNJC-3B	.684	.195	.218	.200	.219	.171	.098	.047	--	--	--	--	--	--	--	--	--	--	L06	L06K	L06W	-06.	-06K	-06W	
138-32UNJC-3B	.935	239	.344	.200	.312	.171	.098	.047	-06	-06K	-06W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.164-32UNJF-3B	.716	.235	.234	.200	.219	.250	.098	--	--	--	--	--	--	--	--	--	--	--	L08	L08K	L08W	-08	-08K	-08W	
.164-32UNJF-3B	.935	.277	.344	.200	312	.250	.098	.047	-08	-08K	-08W	--	--	--	--	--	--	--	--	--	--	--	--	--	
164-32UNJF-3B	.997	.360	.344	.200	.312	.272	.098	--	--	--	--	--	L08	L08K	L08W	-08	-08K	-08W	--	--	--	--	--	--	
.190-32UNJF-3B	.745	.298	.250	.200	.219	.250	.098	--	--	--	--	--	--	--	--	--	--	--	L3	L3K	L3W	-3	-3K	-3W	
.190-32UNJF-3B	.950	.308	.344	.200	.312	.250	.098	.047	-3	-3K	-3W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.190-32UNJF-3B	1.013	.406	.344	.200	.312	.281	.098	--	--	--	--	L3	L3K	L3W	-3	-3K	-3W	--	--	--	--	--	--	--	
.250-28UNJF-3B	.822	.380	.281	.200	.219	.281	.098	--	--	--	--	--	--	--	--	--	--	L4	L4K	L4W	-4	-4K	-4W		
.250-28UNJF-3B	.993	.375	.344	.200	.312	.281	.098	.055	-4	-4K	-4W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.250-28UNJF-3B	1.252	.535	.500	.200	.312	.340	.098	--	--	--	--	L4	L4K	L4W	-4	-4K	-4W	--	--	--	--	--	--	--	
3125-24UNJF-3B	1.026	.475	.359	.230	.269	.328	.130	--	--	--	--	--	--	--	--	--	--	L5	L5K	L5W	-5	-5K	-5W		
.3125-24UNJF-3B	1.210	.485	.500	.230	.312	.328	.130	.065	-5	-5K	-5W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.3125-24UNJF-3B	1.340	681	.500	.230	.312	.422	.130	--	--	--	--	L5	L5K	L5W	-5	-5K	-5W	--	--	--	--	--	--	--	
.375-24UNJF-3B	1.139	.580	.414	--	.269	.344	.130	.075	--	--	--	--	--	--	--	--	--	L6	--	-6W	-6	--	-6W		
.375-24UNJF-3B	1.264	.594	.500	--	.312	.344	.130	.075	-6	--	-6W	--	--	--	--	--	--	--	--	--	--	--	--	--	
.4375-20UNJF-3B	1.446	.697	.562	--	.344	.390	.161	.085	-7	--	-7W	--	--	--	--	--	--	--	--	--	--	--	--	--	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE I - Continued


Material	Steel Alloy								Steel				Corrosion Resistant Steel		
Protective Finish	Cadmium Plate												None Specified		
Performance: Temperature	450°F														
Mounting Configuration	1/		2/		1/		2/		1/		2/		1/		2/		1/	2/	3/
Lubricant: Film	Soluble	Dry	Soluble	Dry	Soluble	Dry	Soluble	Dry	Soluble	Dry	Soluble	Dry	Soluble	Dry	Soluble	Dry	Dry		
T Thread	A Max	B Max	C	ØG	J	H Max	ØK Min	V Max	MS21054 + Dash No.				MS21053 + Dash No.				MS21051 +Dash No.				MS21071 + Dash No.				MS21052 + Dash No.		
.086-56UNJC-3B	.507	.140	.125	--	.219	.110	.066	.035	--	--	--	--	--	--	--	--	--	--	--	--	-02	L02	--	--	--	--	--
.086-56UNJC-3B	.935	.239	.344	.200	.312	.171	.098	.047	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	L02	L02K	L02W
.112-40UNJC-3B	.667	.140	.203	.200	.219	.143	.098	.040	--	--	--	--	--	--	--	--	--	--	--	--	-04	L04	-04K	L04K	--	--	--
.112-40UNJC-3B	.935	.239	.344	.200	.312	.171	.098	.047	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	L04	L04K	L04W
.138-32UNJC-3B	.684	.195	.218	.200	.219	.171	.098	.047	--	--	--	--	--	--	--	--	--	--	--	--	-06	L06	-06K	L06K	--	--	--
.138-32UNJC-3B	.935	.239	.344	.200	.312	.171	.098	.047	-06	L06	-06K	L06K	--	--	--	--	-06	L06	-06K	L06K	--	--	--	--	M06	L06K	L06W
.164-32UNJF-3B	.716	.235	.234	.200	.219	.250	.098	--	--	--	--	--	--	--	--	--	--	--	--	--	-08	L08	-08K	L08K	--	--	--
.164-32UNJF-3B	.935	.277	.344	.200	.312	.250	.098	.047	-08	L08	-08K	L08K	--	--	--	--	-08	L08	-08K	L08K	--	--	--	--	L08	L08K	L08W
.164-32UNJF-3B	.997	.360	.344	.200	.312	.272	.098	--	--	--	--	--	-08	L08	-08K	L08K	--	--	--	--	--	--	--	--	--	--	--
.190-32UNJF-3B	.745	.298	.250	.200	.219	.250	.098	--	--	--	--	--	--	--	--	--	--	--	--	--	.3	L3	-3K	L3K	--	--	--
.190-32UNJF-3B	.950	.308	.344	.200	.312	.250	.098	.047	-3	L3	-3K	L3K	--	--	--	--	-3	L3	-3K	L3K	--	--	--	--	L3	L3K	L3W
.190-32UNJF-3B	1.013	.406	.344	.200	.312	.281	.098	--	--	--	--	--	-3	L3	-3K	L3K	--	--	--	--	--	--	--	--	--	--	--
.250-28UNJF-3B	.822	.380	.281	.200	.219	.281	.098	--	--	--	--	--	--	--	--	--	--	--	--	--	-4	L4	.4K	L4K	--	--	--
.250-28UNJF-3B	.993	.375	.344	.200	.312	.281	.098	.055	-4	L4	-4K	L4K	--	--	--	--	-4	L4	-4K	L4K	--	--	--	--	L4	L4K	L4W
.250-28UNJF-3B	1.252	.535	.500	.200	.312	.340	.098	--	--	--	--	--	-4	L4	-4K	L4K	--	--	--	--	--	--	--	--	--	--	--
.3125-24UNJF-3B	1.026	.475	.359	.230	.269	.328	.130	--	--	--	--	--	--	--	--	--	--	--	--	--	-5	L5	-5K	L5K	--	--	--
.3125-24UNJF-3B	1.210	.485	.500	.230	.312	.328	.130	.065	-5	L5	-5K	L5K	--	--	--	--	-5	L5	-5K	L5K	--	--	--	--	L5	L5K	L5W
.3125-24UNJF-3B	1.340	.681	.500	.230	.312	.422	.130	--	--	--	--	--	-5	L5	5K	L5K	--	--	--	--	--	--	--	--	--	--	--
.375-24UNJF-3B	1.139	.580	.414	--	.269	.344	.130	.075	--	--	--	--	--	--	--	--	--	--	--	--	-6	L6	--	--	--	--	--
.375-24UNJF-3B	1.264	.594	.500	--	.312	.344	.130	.075	-6	L6	--	--	--	--	--	--	-6	L6	-6K	L6K	--	--	--	--	L6	--	L6W
.4375-20UNJF-3B	1.446	.697	.562	--	.344	.390	.161	.085	-7	L7	--	--	--	--	--	--	-7	L7	-7K	L7K	--	--	--	--	L7	--	L7W

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2408

NUT, SELF-LOCKING, PLATE, ONE-LUG, 160 KSI FTU

APPLICABLE DOCUMENTS: NAS 1771, NAS 1776, NAS 1781

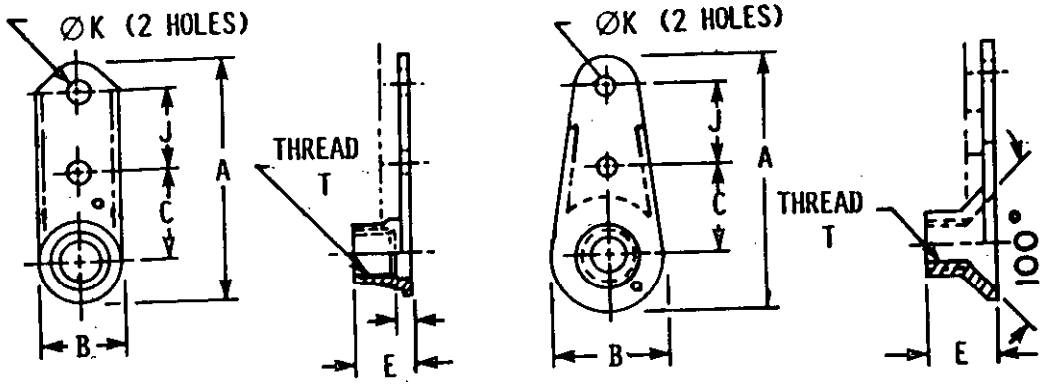

NAS 1771, NAS 1776

NAS 1781

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT-WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	W-SUFFIX

TABLE I

DOCUMENT												
Material								Steel		CRES		
Protective Finish								Cadmium Plate + Dry Film	Cadmium Plate w/o Dry Film	Silver Plate	Dry Film	
Performance Temperature								450°F		800°F	450°F	
	Thread T (-3B)	A Max	B Max	C Nom	E Max	J Nom	ØK Min	Dash Numbers				
NAS 1771	.1380-32UNJC	.935	.265	.344	.171	.312	.098	-06	X06	C06	C06M	
	.1640-32UNJC	.935	.297	.344	.250	.312	.098	-08	X08	C08	C08M	
	.1900-32UNJF	.950	.328	.344	.250	.312	.098	-3	X3	C3	C3M	
	.2500-28UNJF	.993	.414	.344	.281	.312	.098	-4	X4	C4	C4M	
	.3125-24UNJF	1.210	.505	.500	.328	.312	.130	-5	X5	C5	C5M	
	.3750-24UNJF	1.264	.614	.500	.344	.312	.130	-6	X6	C6	C6M	
	.4375-20UNJF	1.446	.726	.562	.390	.344	.161	-7	X7	C7	C7M	
NAS 1776	.1120-40UNJC	.667	.260	.203	.143	.219	.098	-04	X04	C04	C04M	
	.1380-32UNJC	.684	.265	.218	.171	.219	.098	-06	X06	C06	C06M	
	.1640-32UNJC	.716	.297	.234	.250	.219	.098	-08	X08	C08	C08M	
	.1900-32UNJC	.745	.328	.250	.250	.219	.098	-3	X3	C3	C3M	
	.2500-28UNJF	.822	.414	.281	.281	.219	.098	-4	X4	C4	C4M	
	.3125-24UNJF	1.026	.505	.359	.328	.269	.130	-5	X5	C5	C5M	
	.3750-24UNJF	1.139	.614	.414	.344	.269	.130	-6	X6	C6	C6M	
NAS 1781	.1640-32UNJC	.997	.422	.344	.272	.312	.098	-08	X08	C08	C08M	
	.1900-32UNJF	1.013	.453	.344	.281	.312	.098	-3	X3	C3	C3M	
	.2500-28UNJF	1.252	.619	.500	.340	.312	.098	-4	X4	C4	C4M	
	.3125-24UNJF	1.340	.766	.500	.422	.312	.130	-5	X5	C5	C5M	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2409

NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, 125 KSI FTU, 160 KSI FTU

APPLICABLE DOCUMENTS MS21061, MS21062, MS21082, NAS 1774

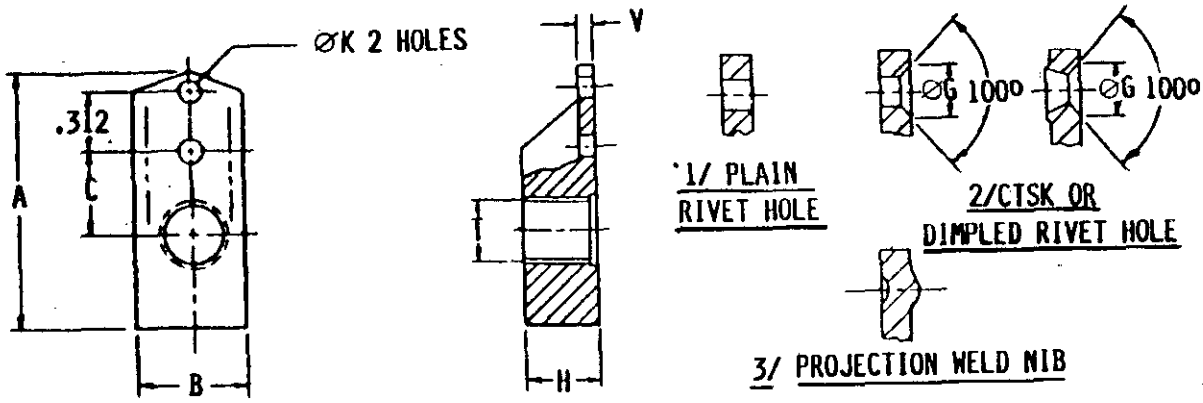


TABLE I 125 KSI FTU

Material	Alloy Steel				Steel with non-metallic insert		CRES					
Performance: Temperature	450°F				250°F		450°F			800°F		
Protective finish	Cadmium Plate						None Specified			Silver Plate		
Mounting Configuration	1/		2/		1/	2/	1/	2/	3/	1/	2/	3/
Lubricant: Film	Dry		Soluble		Dry		Dry			Soluble		

T Thread	A Max	B Min	C	ØS	H Max	ØK Min	V Max	MS21061 + Dash No.				MS21082 + Dash No.		MS21062 + Dash No.					
.112-40UNJC-3B	1.051	.290	.344	.200	.175	.098	.032	-04	L04	-04K	L04K	--	--	L04	L04K	L04W	-04	-04K	-04W
.138-32UNJC-3B	1.051	.290	.344	.200	.203	.098	.032	-06	L06	-06K	L06K	--	--	L06	L06K	L06W	-06	-06K	-06W
.164-32UNJC-3B	1.051	.190	.344	.200	.250	.098	.032	-08	L08	-08K	L08K	--	--	--	--	--	--	--	--
	1.051	.290			.250		.032	--	--	--	--	--	--	L08	L08K	L08W	-08	-08K	-08W
	1.094	.328			.312		.075	--	--	--	--	-08	-08K	--	--	--	--	--	--
.190-32UNJC-3B	1.051	.290	.344	.200	.250	.098	.032	-3	L3	-3K	L3K	--	--	--	--	--	--	--	--
	1.051	.290			.250		.032	--	--	--	--	--	--	L3	L3K	L3W	-3	-3K	-3W
	1.094	.328			.312		.075	--	--	--	--	-3	-3K	--	--	--	--	--	--
.250-28UNJF-3B	1.306	.350	.500	.200	.281	.098	.032	-4	L4	-4K	L4K	--	--	--	--	--	--	--	--
	1.306	.350			.281		.032	--	--	--	--	--	--	L4	L4K	L4W	-4	-4K	-4W
	1.316	.406			.387		.075	--	--	--	--	-4	-4K	--	--	--	--	--	--
.3125-24UNJF-3B	1.396	.412	.500	.230	.328	.130	.045	-5	L5	-5K	--	--	--	--	--	--	--	--	--
	1.396	.412			.328		.045	--	--	--	--	--	--	L5	L5K	L5W	-5	-5K	-5W
	1.378	.484			.387		.075	--	--	--	--	-5	-5K	--	--	--	--	--	--

TABLE II 160 KSI FTU

Material	Steel				CRES				
Performance Temperature	450°F				800°F			450°F	
Protective Finish	Cadmium Plate + Dry Film		w/o Dry Film		Silver Plate			Dry Film	
Mounting Configuration	1/	2/	1/	2/	1/	2/	3/	1/	2/

Thread-T (-3B)	A Max	B Min	C Nom	ØG Nom	H Max	ØK Min	V Max	NAS 1774 + Dash No.									
.1120-40UNJC	1.051	.290	.344	.200	.175	.098	.032	-04	-04X	X04	X04K	C04	C04K	C04W	C04M	C04MK	
.1380-32UNJC	1.051	.290	.344	.200	.203	.098	.032	-06	-06K	X06	X06K	C06	C06K	C06W	C06M	C06MK	
.1640-32UNJC	1.051	.290	.344	.200	.250	.098	.032	-08	-08K	X08	X08K	C08	C08K	C08W	C08M	C08MK	
.1900-32UNJF	1.051	.290	.344	.200	.250	.098	.032	-3	-3K	X3	X3K	C3	C3K	C3W	C3M	C3MK	
.2500-28UNJF	1.306	.350	.500	.200	.281	.098	.032	-4	-4K	X4	X4K	C4	C4K	C4W	C4M	C4MK	
.3125-24UNJF	1.396	.412	.500	.230	.328	.130	.045	-5	-5K	X5	X5K	C5	C5K	C5W	C5M	C5MK	
.3750-24UNJF	1.441	.455	.500	.230	.344	.130	.055	-6	-6K	X6	X6K	C6	C6K	C6W	C6M	C6MK	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2410

NUT, SELF-LOCKING PLATE, ONE LUG, 125 ksi, Ftu (NON-METALLIC INSERT), 250°F

APPLICABLE DOCUMENT: MS21080

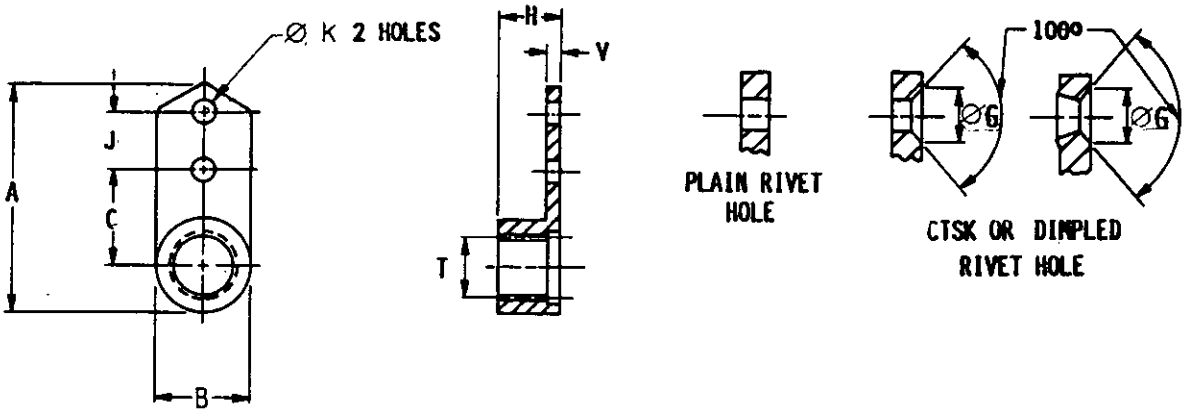


TABLE I

Material									Steel	
Protective finish									Cadmium plate	
Rockwell hardness									C32	
Mounting configuration									Plain holes	CTSK or Dimpled holes
T Thread	A Max	B Min	C	ØG	J	H Max	ØK Min	V Max	MS21080 + Dash no.	
.138-32UNJC-3B	1.031	.375	.344	.200	.312	.297	.098	.075	-06	-06K
.164-32UNJC-3B	1.031	.375	.344	.200	.312	.297	.098	.075	-08	-08K
.190-32UNJF-3B	1.031	.375	.344	.200	.312	.312	.098	.075	-3	-3K
.250-28UNJF-3B	1.062	.438	.344	.200	.312	.375	.098	.075	-4	-4K
.3125-24UNJF-3B	1.250	.500	.500	.230	.312	.375	.130	.075	-5	-5K
.375-24UNJF-3B	1.344	.609	.500	.230	.312	.453	.130	.075	-6	-6K

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2411

NUT, SELF-LOCKING, PLATE, RIGHT ANGLE

APPLICABLE DOCUMENT: AN256

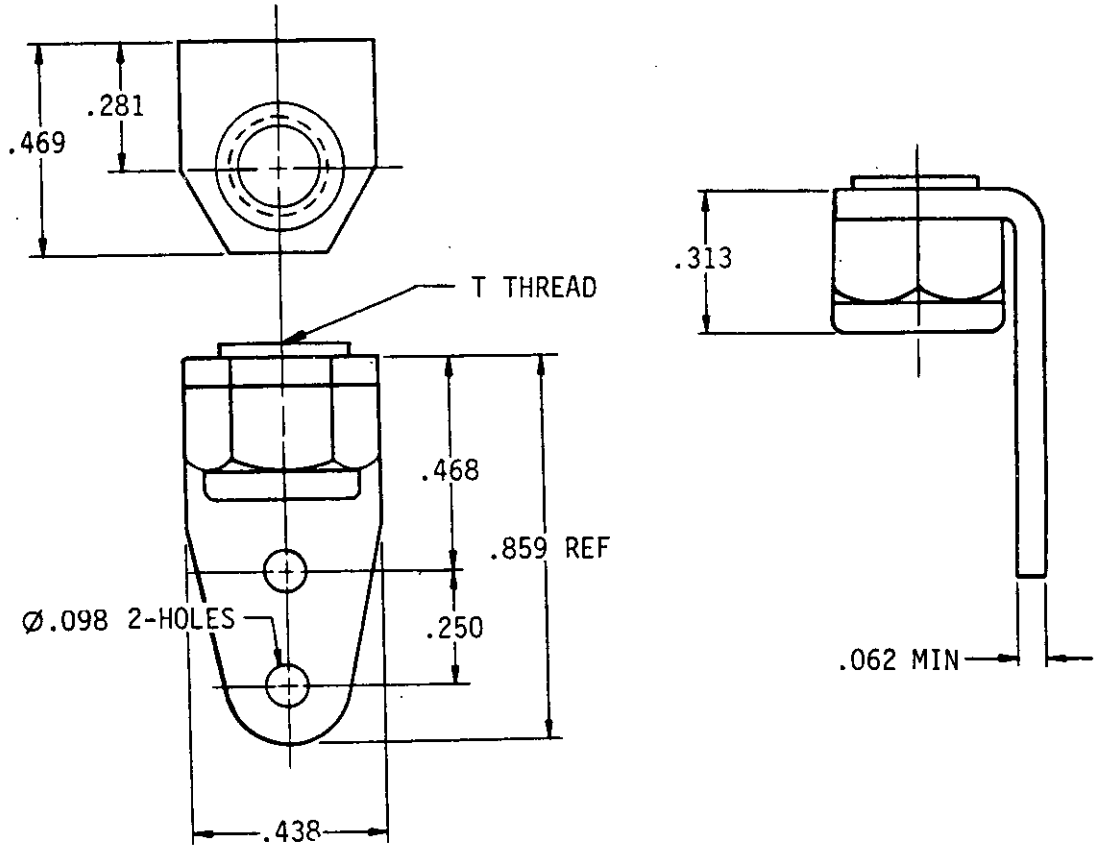


TABLE I


Material ---	Aluminum alloy	Steel
T Thread	AN256 +Dash no.	
.138-32UNC-3B	-6	F6
.164-32UNC-3B	-8	F8
.190-32UNF-3B	-10	F10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2412

NUT, SELF-LOCKING, PLATE RIGHT-ANGLE, FLOATING

APPLICABLE DOCUMENT: NAS 1033

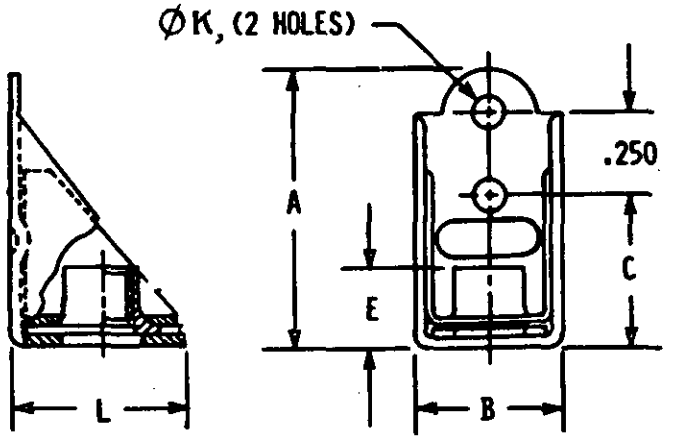

DASH NUMBER CODES

PLAIN RIVET HOLE	COUNTERSUNK OR DIMPLED RIVET HOLE	WITHOUT DRY FILM LUBRICANT FOR "A" AND "P" CODED PLATED STEEL NUT
NO SUFFIX	K SUFFIX	X-INTERFIX

TABLE I


Material	Nylon Insert: Alum Nut	Nylon Insert: Steel Nut	All Metal: Steel Nut	All Metal: Steel Assy	All Metal: CRES Assy
	Alum or Steel Housing				
Protective Finish	Steel - Code X or Cadmium Plate Alum-Anodize or Chemical Film			Cadmium Plate & Dry Film	Silver Plate
Performance Temperature	250° F			450°	800°F

Thread (-3B)	A Max	B Max	C Nom	E Max	ØK Min	L Max	NAS 1033 & Dash No.				
.1380-32UNJC	.906	.619	.484	.343	.098	.531	DD6	ND6	PD6	AD6	CD6
.1640-32UNJC	.906	.619	.484	.343	.098	.531	DD8	ND8	PD8	AD8	CD8
.1900-32UNJF	.906	.619	.484	.343	.098	.531	D3	N3	P3	A3	C3
.2500-28UNJF	.906	.687	.484	.375	.098	.585	D4	N4	P4	A4	C4
.3125-24UNJF	1.000	.750	.578	.437	.130	.645	D5	N5	P5	A5	C5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2413
NUT, SELF - LOCKING, PLATE, SIDE BY SIDE, 125 ksi, F_{tu}

APPLICABLE DOCUMENTS: MS21086, MS21087

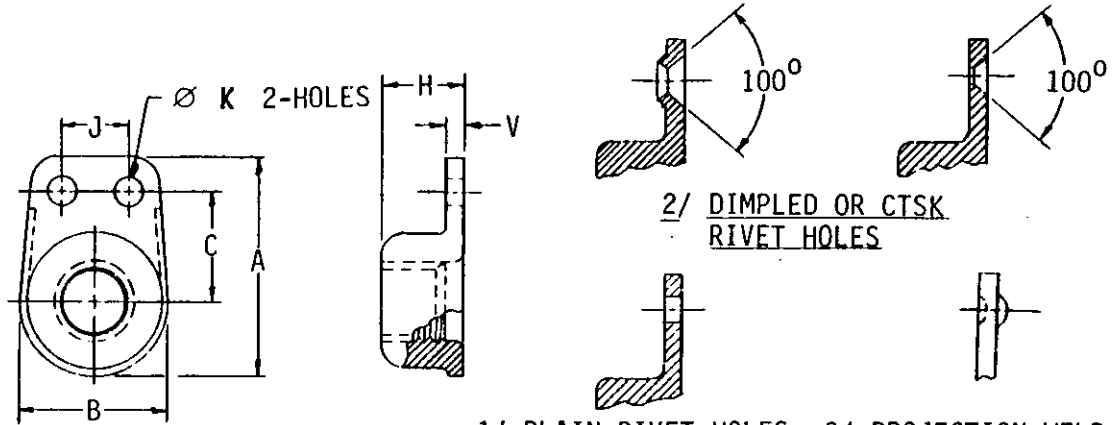

2/ DIMPLED OR CTSK RIVET HOLES

1/ PLAIN RIVET HOLES 3/ PROJECTION WELD NIBS

TABLE I


Material								Steel				CRES					
Protective finish								Cadmium plate				Silver plate					
Performance: Temperature								450°F				450°F			800°F		
Mounting configuration								1/		2/		1/	2/	3/	1/	2/	3/
Lubricant								MS21086 + Dash no.				MS21087 + Dash no.					
Thread	A Max	B Min	C	H Max	J	ØK Min	V Max	Non-dry	Dry	Non-dry	Dry	Dry			Non-dry		
.164-32UNC-3B	.486	.235	.234	.250	.219	.098	.047	-08	L08	-08K	L08K	L08	L08K	L08W	-08	-08K	-08W
.190-32UNF-3B	.521	.298	.250	.250	.219	.098	.047	-3	L3	-3K	L3K	L3	L3K	L3W	-3	-3K	-3W
.250-28UNF-3B	.591	.380	.281	.281	.219	.098	.055	-4	L4	-4K	L4K	L4	L4K	L4W	-4	-4K	-4W
.3125-24UNF-3B	.747	.475	.359	.328	.269	.130	.065	-5	L5	-5K	L5K	L5	L5K	L5W	-5	-5K	-5W
.375-24UNF-3B	.856	.580	.414	.344	.269	.130	.075	-6	L6	--	--	L6	--	L6W	-6	--	-6W

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2414

NUT, SELF-LOCKING, PLATE, SIDE BY SIDE 160 KSI FTU

APPLICABLE DOCUMENT: NAS 1778

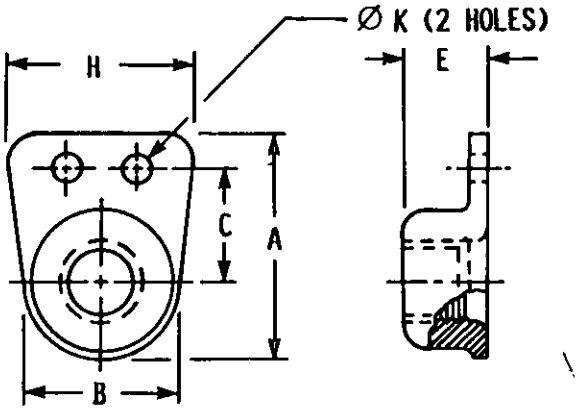

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT-WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	W-SUFFIX

TABLE I


Material							Steel		CRES	
Protective Finish							Cadmium Plate + Dry Film	Cadmium Plate w/o Dry Film	Silver Plate	Dry Film
Performance Temperature							450°F		800°F	450°F
Thread (-38)	A Max	B Max	C Nom	E Max	H Max	Ø K Min	NAS 1778 + Dash No.			
.1640-32UNJC	.486	.297	.234	.250	.437	.098	-08	X08	C08	C08M
.1900-32UNJF	.521	.328	.250	.250	.437	.098	-3	X3	C3	C3M
.2500-28UNJF	.591	.414	.281	.281	.437	.098	-4	X4	C4	C4M
.3125-24UNJF	.747	.505	.359	.328	.537	.130	-5	X5	C5	C5M
.3750-24UNJF	.856	.614	.414	.344	.537	.130	-6	X6	C6	C6M

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2415

NUT, SELF-LOCKING, PLATE, SIDE BY SIDE FLOATING, LOW HEIGHT, 160 KSI FTU

APPLICABLE DOCUMENT: NAS 1789

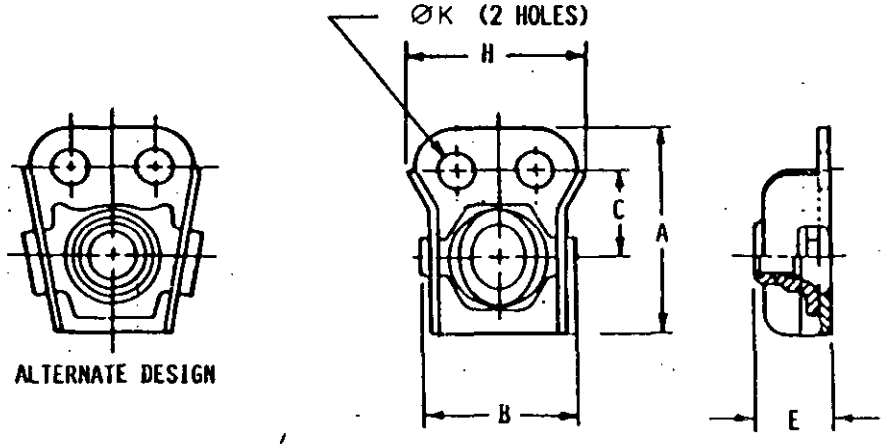

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT-WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	W-SUFFIX

TABLE I


Material							Steel		CRES	
Protective Finish							Cadmium Plate + Dry Film	Cadmium Plate w/o Dry Film	Silver Plate	Dry Film
Performance Temperature							450°F		800°F	450°F
Thread (-3B)	A Max	B Max	C Nom	E Max	H Max	ØK Min	NAS 1789 + Dash No.			
.1380-32UNJC	.525	.440	.250	.203	.490	.098	-06	X06	C06	C06M
.1640-32UNJC	.525	.440	.250	.250	.490	.098	-08	X08	C08	C08M
.1900-32UNJF	.525	.440	.250	.250	.490	.098	-3	X3	C3	C3M
.2500-28UNJF	.617	.557	.281	.281	.502	.098	-4	X4	C4	C4M
.3125-24UNJF	.767	.619	.359	.328	.609	.130	-5	X5	C5	C5M
.3750-24UNJF	.876	.682	.414	.344	.629	.130	-6	X6	C6	C6M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2416

NUT, SELF-LOCKING, PLATE, TWO LUG, 125 KSI FTU

APPLICABLE DOCUMENTS: MS20501, MS21047, MS21048, MS21049, MS21050, MS21069, MS21070, MS21078

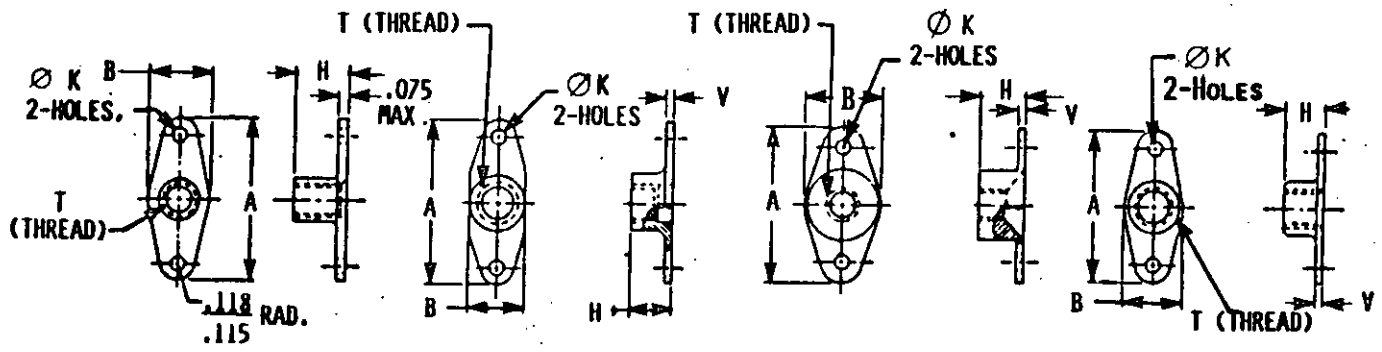

MS20501 MS21070 MS21049 MS21078

TABLE I

Material							CRES											
Protective Finish							Silver Plate											
Performance Temperature							1200°F	800°F 1/										
Rockwell Hardness							None Specified	C49 Max						None Specified				
T Thread		A Max	B Max	ØK Max	H Max	V Max	MS20501 + Dash No.	MS21048 + Dash No.			MS21050 + Dash No.			MS21070 + Dash No.				
								Plain Holes	CTSK Holes	Welding Projection	Plain Holes	CTSK Holes	Welding Projection	Plain Holes	CTSK Holes	Welding Projection		
.086	-56UNJC-3B	.410	.162	.071	.110	.035	--	--	--	--	--	--	--	-02	--	02W		
.099	-48UNJC-3B	.425	.184	.071	.125	.085	--	--	--	--	--	--	--	-03	--	-03W		
.112	-40UNJC-3B	.630 .948 .984	.260 .260 .406	.103	.143 .143 .218	.040 .047 .075	-- -- --	-- -04 --	-- -04K --	-- -04W --	-- -- --	-- -- --	-- -- --	-04 -- --	-04K -- --	-04W -- --		
.138	-32UNJC-3B	.651 .948 .984 .986	.265 .265 .406 .407	.103	.171 .171 .234 .234	.047 .047 .075 .075	-- -- -- -632	-- -06 -- --	-- -06K -- --	-- -06W -- --	-- -- -- --	-- -- -- --	-- -- -- --	-06 -- -- --	-06K -- -- --	-06W -- -- --		
.164	-32UNJC-3B	.692 .948 .948 .984 .986	.297 .297 .422 .406 .407	.103	.250 .250 .272 .297 .251	.047 .047 .047 .075 .075	-- -- -- -- -832	-- -08 -- -- --	-- -08K -- -- --	-- -08W -- -- --	-- -- -08 -- --	-- -- -08K -- --	-- -- -08W -- --	-08 -- -- -- --	-08K -- -- -- --	-08W -- -- -- --		
.190	-32UNJF-3B	.724 .948 .948 .984 .986	.328 .328 .453 .406 .407	.103	.250 .250 .281 .312 .251	.047 .047 .047 .075 .075	-- -- -- -- -1032	-- -3 -- -- --	-- -3K -- -- --	-- -3W -- -- --	-- -- -3 -- --	-- -- -3K -- --	-- -- -3W -- --	-3 -- -- -- --	-3K -- -- -- --	-3W -- -- -- --		
.250	-28UNJF-3B	.786 1.260 1.260 1.296 1.298	.414 .414 .619 .516 .516	.103	.281 .281 .340 .375 .329	.055 .055 .055 .075 .075	-- -- -- -- -428	-- -4 -- -- --	-- -4K -- -- --	-- -4W -- -- --	-- -- -4 -- --	-- -- -4K -- --	-- -- -4W -- --	-4 -- -- -- --	-4K -- -- -- --	-4W -- -- -- --		
.3125	-24UNJF-3B	1.006 1.292 1.292 1.296 1.298	.505 .505 .766 .531 .532	.135	.328 .328 .422 .375 .360	.065 .065 .065 .075 .075	-- -- -- -- -524	-- -5 -- -- --	-- -5K -- -- --	-- -5W -- -- --	-- -- -5 -- --	-- -- -5K -- --	-- -- -5W -- --	-5 -- -- -- --	-5K -- -- -- --	-5W -- -- -- --		
.375	-24UNJF-3B	1.116 1.292 1.296 1.298	.614 .614 .641 .541	.135	.344 .344 .453 .469	.075 .075 .115 .075	-- -- -- -624	-- -6 -- --	-- -6K -- --	-- -6W -- --	-- -- -- --	-- -- -- --	-- -- -- --	-6 -- -- --	-- -- -- --	-6W -- -- --		
.4375	-20UNJF-3B -20UNJF-3B -20UNJF-3B	1.477 1.477 1.477	.719 .726 .725	.166 .166	.469 .390 .390	.115 .085 .085	-- -- --	-- -- -7	-- -- --	-- -- -7W	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --		
.500	-20UNJF-3B	1.602	.859	.166	.609	.115	--	-8	--	-8W	--	--	--	--	--	--		
.5625	-18UNJC-3B	1.727	.953	.166	.656	.115	--	-9	--	-9W	--	--	--	--	--	--		
.625	-18UNJF-3B	1.852	1.016	.166	.765	.115	--	-10	--	-10W	--	--	--	--	--	--		

1/ PREFIX "L" FOR 450°F + DRY FILM LUBRICANT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE I (Continued)


Material							Steel						Steel w/non-metallic insert	
Protective Finish							Cadmium Plate						Cadmium Plate	
Performance: Temperature							450°F						250°F	
Rockwell Hardness							C49 Max						C32 Max	
T Thread		A Max	B Max	ØK Max	H Max	V Max	MS21047 + Dash No.		MS21049+Dash No.		MS21069+Dash No.		MS21078 + Dash No.	
							Plain Holes	CTSK Holes	Plain Holes	CTSK Holes	Plain Holes	CTSK Holes	Plain Holes	CTSK Holes
.086	-56UNJC-3B	.410	.162	.071	.110	.035	--	--	--	--	-02	--	--	--
.099	048UNJF-3B	.425	.184	.071	.125	.035	--	--	--	--	-03	--	--	--
.112	-40UNJC-3B	.630	.260	.103	.143	.040	--	--	--	--	-04	-04K	--	--
		.948	.260		.143	.047	-04	-04K	--	--	--	--	--	--
		.984	.406		.218	.075	--	--	--	--	--	--	-04	-04K
.138	-32UNJC-3B	.661	.265	.103	.171	.047	--	--	--	--	-06	-06K	--	--
		.948	.265		.171	.047	-06	-06K	--	--	--	--	--	--
		.984	.406		.234	.075	--	--	--	--	--	--	-06	-06K
		.986	.407		.234	.075	--	--	--	--	--	--	--	--
.164	-32UNJC-3B	.692	.297	.103	.250	.047	--	--	--	--	-08	-08K	--	--
		.948	.297		.250	.047	-08	-08K	--	--	--	--	--	--
		.948	.422		.272	.047	--	--	-08	-08K	--	--	--	--
		.984	.406		.297	.075	--	--	--	--	--	--	-08	-08K
		.986	.407		.251	.075	--	--	--	--	--	--	--	--
.190	-32UNJF-3B	.724	.328	.103	.250	.047	--	--	--	--	-3	-3K	--	--
		.948	.328		.250	.047	-3	-3K	--	--	--	--	--	--
		.948	.453		.281	.047	--	--	-3	-3K	--	--	--	--
		.984	.406		.312	.075	--	--	--	--	--	--	-3	-3K
		.986	.407		.251	.075	--	--	--	--	--	--	--	--
.250	-28UNJF-3B	.786	.414	.103	.281	.055	--	--	--	--	-4	-4K	--	--
		1.260	.414		.281	.055	-4	-4K	--	--	--	--	--	--
		1.260	.619		.340	.055	--	--	-4	-4K	--	--	--	--
		1.296	.516		.375	.075	--	--	--	--	--	--	-4	-4K
		1.298	.516		.329	.075	--	--	--	--	--	--	--	--
.3125	-24UNJF-3B	1.006	.505	.135	.328	.065	--	--	--	--	-5	-5K	--	--
		1.292	.505		.328	.065	-5	-5K	--	--	--	--	--	--
		1.292	.766		.422	.065	--	--	-5	-5K	--	--	--	--
		1.296	.531		.375	.075	--	--	--	--	--	--	-5	-5K
		1.298	.532		.360	.075	--	--	--	--	--	--	--	--
.375	-24UNJF-3B	1.116	.614	.135	.344	.075	--	--	--	--	-6	--	--	--
		1.292	.614		.344	.075	-6	--	--	--	--	--	--	--
		1.296	.641		.453	.115	--	--	--	--	--	--	-6	-6K
		1.298	.641		.469	.075	--	--	--	--	--	--	--	--
.4375	-20UNJF-3B	1.477	.719	.166	.469	.115	--	--	--	--	--	--	-7	--
		1.477	.726		.390	.085	-7	--	--	--	--	--	--	--
		1.477	.726		.390	.085	--	--	--	--	--	--	--	--
.500	-20UNJF-3B	1.602	.859	.166	.609	.115	-8	--	--	--	--	--	-8	--
.5625	-18UNJF-3B	1.727	.953	.166	.656	.115	-9	--	--	--	--	--	-9	--
.625	-18UNJF-3B	1.852	1.016	.166	.765	.115	-10	--	--	--	--	--	-10	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.


SECTION 2417

NUT, SELF-LOCKING, PLATE, TWO LUG, 160 KSI FTU

APPLICABLE DOCUMENTS: NAS 1770, NAS 1775, NAS 1780

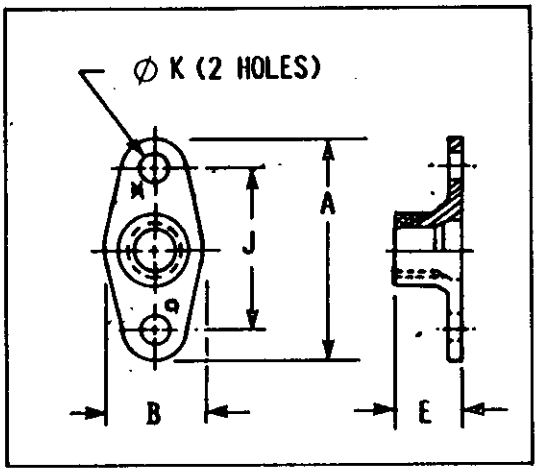

NAS 1770
NAS 1775

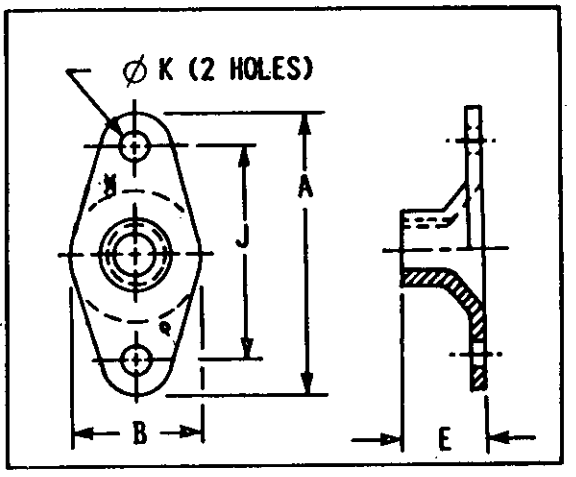

NAS 1780

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT-WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	W-SUFFIX

TABLE I


DOCUMENT	Material						Steel		CRES	
	Protective Finish						Cadmium Plate + Dry Film	Cadmium Plate w/o Dry Film	Silver Plate	Dry Film
	Performance Temperature						450°F		800°F	450°F
	Thread (-3B)	A Max	B Max	E Max	J Nom	Ø K Min	Dash Numbers			
NAS 1770	.1120-40UNJC	.948	.260	.143	.688	.098	-04	X04	C04	C04M
	.1380-32UNJC	.948	.265	.171	.688	.098	-06	X06	C06	C06M
	.1640-32UNJC	.948	.297	.250	.688	.098	-08	X08	C08	C08M
	.1900-32UNJF	.948	.328	.250	.688	.098	-3	X3	C3	C3M
	.2500-28UNJF	1.260	.414	.281	1.000	.098	-4	X4	C4	C4M
	.3125-24UNJF	1.292	.505	.328	1.000	.130	-5	X5	C5	C5M
	.3750-24UNJF	1.292	.614	.344	1.000	.130	-6	X6	C6	C6M
	.4375-20UNJF	1.477	.726	.390	1.125	.161	-7	X7	C7	C7M
NAS 1775	.1120-40UNJC	.630	.260	.143	.406	.098	-04	X04	C04	C04M
	.1380-32UNJC	.661	.265	.171	.437	.098	-06	X06	C06	C06M
	.1640-32UNJC	.692	.297	.250	.468	.098	-08	X08	C08	C08M
	.1900-32UNJF	.724	.328	.250	.500	.098	-3	X3	C3	C3M
	.2500-28UNJF	.786	.414	.281	.562	.098	-4	X4	C4	C4M
	.3125-24UNJF	1.006	.505	.328	.718	.130	-5	X5	C5	C5M
	.3750-24UNJF	1.116	.614	.344	.828	.130	-6	X6	C6	C6M
NAS 1780	.1640-32UNJC	.948	.422	.272	.688	.098	-08	X08	C08	C08M
	.1900-32UNJF	.948	.453	.281	.688	.098	-3	X3	C3	C3M
	.2500-28UNJF	1.260	.619	.340	1.000	.098	-4	X4	C4	C4M
	.3125-24UNJF	1.292	.766	.422	1.000	.130	-5	X5	C5	C5M

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2418

NUT, SELF-LOCKING, PLATE, TWO-LUG, CAP, FLOATING

APPLICABLE DOCUMENTS: NAS 1473, NAS 1474

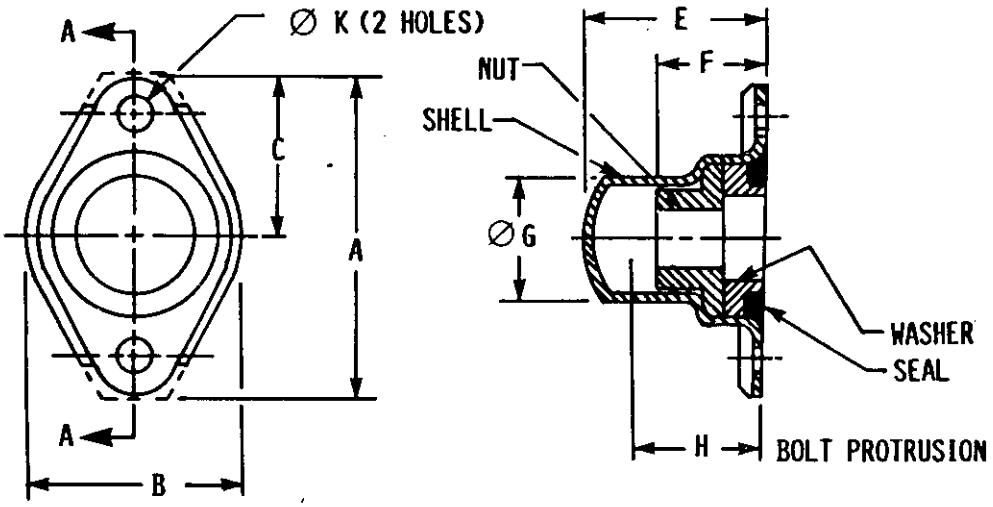

SECTION A-A

TABLE I


Material	Nut	Steel		Steel		CRES											
	Shell	Steel		Steel		CRES											
	Washer	Aluminum or Steel		Steel		CRES											
	Seal	Fuel Resist		Fuel Resist		Non Fuel Resist		Fuel Resist		Fuel Resist							
Protective Finish	Steel	Cadmium Plate				- - - - - - - - -											
	Aluminum	Anodize or Chem. Film		----------		- - - - - - - - -											
	CRES	----------		----------		Silver Plate		Green and Passivate									
	Dry Film Lubricant	with	without	with	without	without		with		with							
Performance Temperature		225°F		350°F		450°F		350°F		225°F							
Thread (-38)	A Max	B Max	C Nom	E Max	F Max	∅G Max	H Max	∅K Min	NAS 1473 + Dash No.								
.1640-32UNJC	.989	.568	.344	.640	.313	.352	.568	.098	A08	X08	S08	Y08	C08		F08		R08
.1900-32UNJF	.989	.568	.344	.640	.313	.352	.568	.098	A3	X3	S3	Y3	C3		F3		R3
.2500-28UNJF	1.296	.668	.500	.755	.372	.419	.687	.098	A4	X4	S4	Y4	C4		F4		R4
.3125-24UNJF	1.296	.762	.500	.823	.410	.520	.728	.130	A5	X5	S5	Y5	C5		F5		R5
Reduced River Spacing									NAS 1474 + Dash No.								
.1120-40UNJC	.840	.443	.295	.405	.204	.352	.340	.098	A04	X04	S04	Y04	C04		F04		R04
.1380-32UNJC	.840	.443	.295	.405	.221	.352	.340	.098	A06	X06	S06	Y06	C06		F05		R06
.1640-32UNJC	.840	.443	.295	.405	.268	.352	.340	.098	A08	X08	S08	Y08	C08		F08		R08
.1900-32UNJF	.840	.443	.295	.405	.268	.352	.340	.098	A3	X3	S3	Y3	C3		F3		R3
.2500-28UNJF	1.000	.635	.376	.560	.350	.419	.490	.098	A4	X4	S4	Y4	C4		F4		R4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2419


NUT, SELF-LOCKING, PLATE, TWO LUG, FLOATING, 125 KSI FtU

APPLICABLE DOCUMENTS: MS21059, MS21060, MS21075, MS21076, MS21077

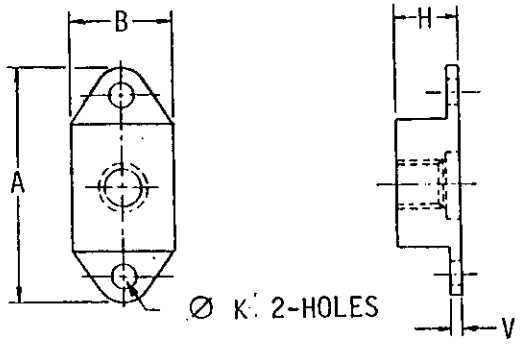




1/ PLAIN RIVET HOLE

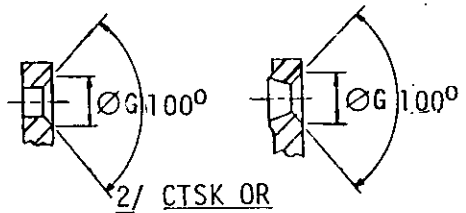

2/ CTSK OR DIMPLED RIVET HOLE



3/ PROJECTION WELD NIB

TABLE I

Material	Alloy steel		Steel	Steel/Aluminum		CRES			
Protective finish	Cadmium plate			Cadmium/Anodize		Silver plate			
Rockwell hardness	C49 Max			C36 Max		C49 Max			
Performance: Temperature	450°F			250°F		800°F			
Mounting configuration	1/	2/	1/	1/	2/	1/	2/	3/	1/


Thread	A Max	B Max	ØG	ØK Min	H Max	V Max	MS21059 + Dash no.		MS21075 + Dash no.	MS21077 + Dash no.		MS21060 + Dash no.			MS21076 + Dash no.
.112 -40UNJC-3B	.651	.315	200	.098	.153	.140	--	--	-04	--	--	--	--	--	-04
	.948	.416		.098	.175	.032	-04	-04K	--	--	--	-04	-04K	-04W	--
.138 -32UNJC-3B	.682	.357	200	.098	.171	.140	--	--	-06	--	--	--	--	--	-06
	.948	.416		.098	.203	.032	-06	-06K	--	--	--	-06	-06K	-06W	--
	.984	.416		.098	.234	.075	--	--	--	-06	-06K	--	--	--	--
.164 -32UNJC-3B	.707	.367	200	.098	.250	.140	--	--	-08	--	--	--	--	--	-08
	.948	.416		.098	.250	.032	-08	-08K	--	--	--	-08	-08K	-08W	--
	.984	.416		.098	.312	.075	--	--	--	-08	-08K	--	--	--	--
.190 -32UNJF-3B	.739	.416	200	.098	.250	.140	--	--	-3	--	--	--	--	--	-3
	.948	.416		.098	.250	.032	-3	-3K	--	--	--	-3	-3K	-3W	--
	.984	.416		.098	.312	.075	--	--	--	-3	-3K	--	--	--	--
.250 -28UNJF-3B	.801	.500	200	.098	.281	.140	--	--	-4	--	--	--	--	--	-4
	1.292	.516		.098	.281	.032	-4	-4K	--	--	--	-4	-4K	-4W	--
	1.296	.516		.098	.387	.075	--	--	--	-4	-4K	--	--	--	--
.3125 -24UNJF-3B -28UNJF-3B	1.010	.581	230	.130	.328	.160	--	--	-5	--	--	--	--	--	-5
	1.292	.609		.130	.328	.045	--	--	--	--	--	-5	-5K	-5W	--
	1.296	.609		.130	.387	.075	--	--	--	-5	-5K	--	--	--	--
	1.292	.609		.130	.328	.045	-5	-5K	--	--	--	--	--	--	--
.375 -24UNJF-3B	1.292	.680	230	.130	.344	.055	-6	-6K	--	--	--	-6	--	-6W	--
	1.296	.641		.130	.479	.075	--	--	--	-6	-6K	--	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2420

NUT, SELF-LOCKING, PLATE-TWO LUG, FLOATING REPLACEABLE NUT ELEMENT, 125 KSI FTU

APPLICABLE DOCUMENT: NAS 1791

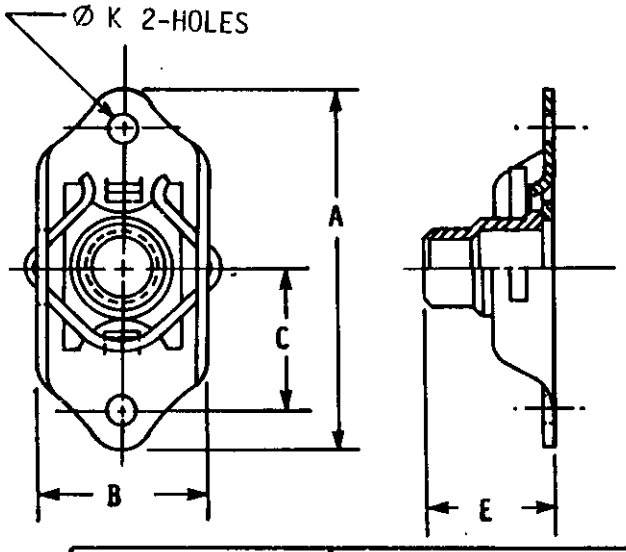

NOTE:

"N" SUFFIXED TO DASH NUMBER INDICATES WITHOUT DRY FILM LUBRICANT.

MOUNTING CONFIGURATION CODES

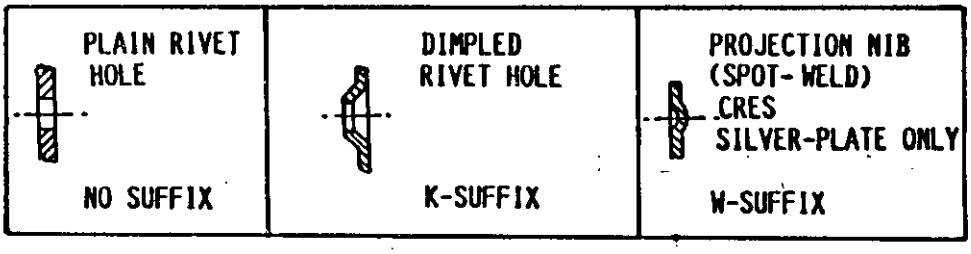


TABLE I


Material						Steel	CRES	
Protective Finish						Cadmium Plate	Passivate	Silver Plate
Performance Temperature						450°F	450°F	800°F
Thread (3-B)	A Max	B Max	C Nom	E Max	ØK Min	NAS 1791 + Dash no.		
.1900-32UNJF	.948	.445	.344	.250 .312 .375 .438 .500 .562	.098	A3-1 A3-2 A3-3 A3-4 A3-5 A3-6	C3-1 C3-2 C3-3 C3-4 C3-5 C3-6	C3-1P C3-2P C3-3P C3-4P C3-5P C3-6P
.2500-28UNJF	1.292	.547	.500	.295 .357 .419 .481 .543 .605	.098	A4-1 A4-2 A4-3 A4-4 A4-5 A4-6	C4-1 C4-2 C4-3 C4-4 C4-5 C4-6	C4-1P C4-2P C4-3P C4-4P C4-5P C4-6P
.3125-24UNJF	1.292	.643	.500	.344 .400 .461 .524 .586 .649	.130	A5-1 A5-2 A5-3 A5-4 A5-5 A5-6	C5-1 C5-2 C5-3 C5-4 C5-5 C5-6	C5-1P C5-2P C5-3P C5-4P C5-5P C5-6P

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2421

NUT, SELF-LOCKING, PLATE, TWO LUG LOW HEIGHT, FLOATING, 160 KSI Ftu

APPLICABLE DOCUMENT: NAS 1773

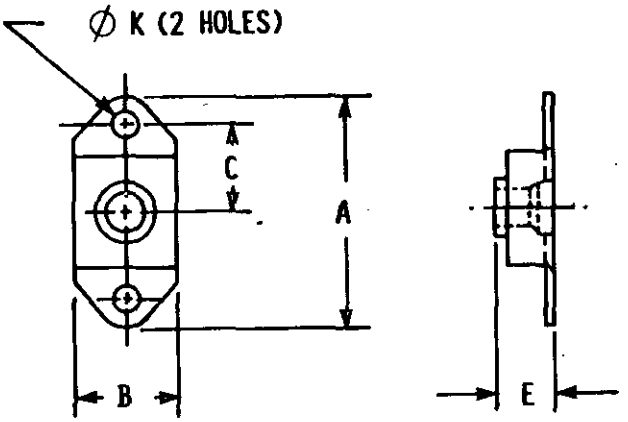

MOUNTING CONFIGURATION CODES

PLAIN RIVET HOLE	DIMPLED RIVET HOLE	PROJECTION NIB (SPOT-WELD) CRES SILVER-PLATE ONLY
NO SUFFIX	K-SUFFIX	W-SUFFIX

TABLE I

Material	Steel		CRES	
Protective Finish	Cadmium + Dry Film	Plate w/o Dry Film	Silver Plate	Dry Film
Performance Temperature	450°F	450°F	800°F	450°F


Thread (-3B)	A Max	B Max	C Nom	E Max	ØK Min	NAS 1773 + Dash No.			
.1120-40UNJC	.948	.416	.344	.175	.098	-04	X04	C04	C04M
.1380-32UNJC	.948	.416	.344	.203	.098	-06	X06	C06	C06M
.1640-32UNJC	.948	.416	.344	.250	.098	-08	X08	C08	C08M
.1900-32UNJF	.948	.416	.344	.250	.098	-3	X3	C3	C3M
.2500-28UNJF	1.292	.516	.500	.281	.098	-4	X4	C4	C4M
.3125-24UNJF	1.292	.609	.500	.328	.130	-5	X5	C5	C5M
.3750-24UNJF	1.292	.680	.500	.344	.130	-6	X6	C6	C6M

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2422

NUT, SELF-LOCKING, PLATE, TWO LUG, LOW HEIGHT FLOATING, REDUCED RIVET SPACING, 160 KSI FTU

APPLICABLE DOCUMENT: NAS 1779

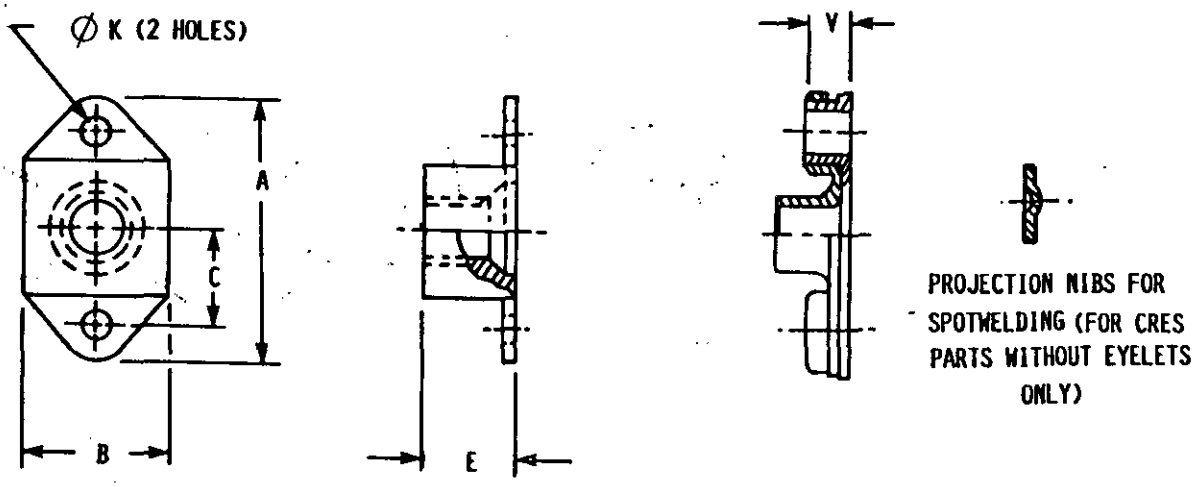

CODE: "-" STEEL, CADMIUM PLATED WITH DRY FILM LUBRICANT AND NUTS WITH OR WITHOUT EYELET
"C" IN PLACE OF DASH INDICATES CRES NUTS WITH SILVER PLATE, WITH OR WITHOUT EYELET
"M" SUFFIXED TO THE DASH NUMBER INDICATES CRES NUTS. WITHOUT SILVER PLATE, WITH DRY FILM LUBRICANT.
"R" IN PLACE OF DASH OR BEFORE "C" OR "X" INDICATES NUT TYPES WITHOUT EYELET.
"W" SUFFIXED TO THE DASH NUMBER SPECIFIES PROJECTION WELD NIBS FOR CRES SILVER PLATED PARTS CODED "R" ONLY.
NO SILVER PLATE ON WELD NIBS.
"X" IN PLACE OF DASH INDCATES CADMIUM PLATED NUTS WITHOUT DRY FILM LUBRICANT.

TABLE I


Material							Steel		CRES	
Protective Finish							Cadmium + Dry Film	Plate w/o Dry Film	Silver Plate	Dry Film
Performance Temperature							450°F		800°F	450°F
Thread (-3B)	A Max	B Max	C Nom	E Max	ØK Min	V Max	NAS 1779 + Dash No.			
.1120-40UNJC	.651	.315	.203	.153	.098	.140	-04	X04	C04	C04M
.1380-32UNJC	.682	.357	.218	.171	.098	.140	-06	X06	C06	C06M
.1640-32UNJC	.707	.367	.234	.250	.098	.140	-08	X08	C08	C08M
.1900-32UNJF	.739	.416	.250	.250	.098	.140	-3	X3	C3	C3M
.2500-28UNJF	.801	.500	.281	.281	.098	.140	-4	X4	C4	C4M
.3125-24UNJF	1.010	.581	.359	.328	.130	.140	-5	X5	C5	C5M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2501

NUT, SELF-LOCKING, ROUND, FLANGED

APPLICABLE DOCUMENTS: MS14156, MS14164, MS14182, MS21084
MS21085, MS21133

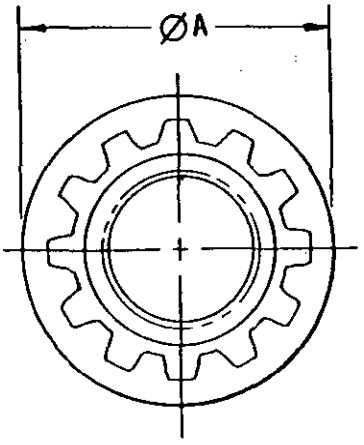

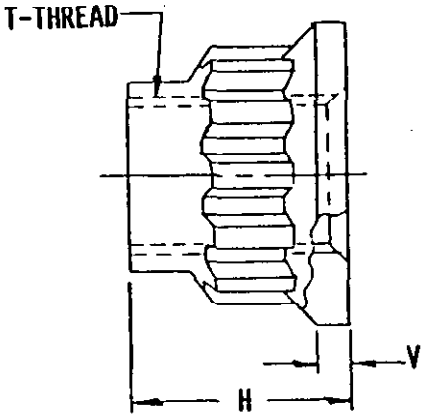


TABLE I (180 KSI, 450°F)

Material				Steel, Alloy		
Protective Finish				Cadmium Plate		
Lubricant				Non-Dry	Dry	Non-Dry
T-Thread (-3B)	Ø A Max	H Max	V Min	MS21133 + Dash No.		MS14156 + Dash No.
.190-32UNJF	.346	.190	.021	-03	L03	--
.250-28UNJF	.439 .444	.250 .290	.028 .033	-04 --	L04 --	-- -04
.3125-24UNJF	.534 .547	.312 .363	.034 .038	-05 --	L05 --	-- -05
.375-24UNJF	.634 .654	.375 .438	.041 .045	-06 --	L06 --	-- -06
.4375-20UNJF	.733 .753	.438 .506	.040 .053	-07 --	L07 --	-- -07
.500-20UNJF	.833 .863	.500 .549	.055 .060	-08 --	L08 --	-- -08
.625-18UNJF	1.030 1.050	.625 .650	.069 .075	-10 --	L10 --	-- -10
.750-16UNJF	1.224 1.230	.750 .750	.083 .090	-12 --	L12 --	-- -12
.875-14UNJF	1.419 1.438	.875 .875	.096 .105	-14 --	L14 --	-- -14
1.000-12UNJF	1.620 1.625	1.000 1.000	.110 .120	-16 --	L16 --	-- -16
1.250-12UNJF	2.022	1.250	.138	-20	L20	--
1.375-12UNJF	2.221	1.375	.151	-22	L22	--
1.500-12UNJF	2.423	1.500	.166	-24	L24	--

TABLE II (220 KSI, 450°F)

Material				Steel, Alloy		
Protective Finish				Cadmium Plate		
Lubricant				Non-Dry	Dry	Non-Dry
T-Thread (-3B)	Ø A Max	H Max	V Min	MS21084 + Dash No.		MS14164 + Dash No.
.190-32UNJF	.362	.220	.023	-03	L03	--
.250-28UNJF	.438 .460	.300 .290	.030 .033	-- -04	-- L04	-04 --
.3125-24UNJF	.531 .563	.385 .360	.045 .038	-- -05	-- L05	-05 --
.375-24UNJF	.649 .669	.455 .430	.070 .045	-- -06	-- L06	-06 --
.4375-20UNJF	.750 .778	.520 .500	.085 .053	-- -07	-- L07	-07 --
.500-20UNJF	.828 .879	.600 .575	.105 .060	-- -08	-- L08	-08 --
.625-18UNJF	1.050 1.088	.740 .720	.105 .075	-- -10	-- L10	-10 --
.750-16UNJF	1.230 1.296	.900 .860	.130 .090	-- -12	-- L12	-12 --
.875-14UNJF	1.438 1.505	1.060 1.000	.155 .105	-- -14	-- L14	-14 --
1.000-12UNJF	1.625 1.720	1.210 1.150	.185 .120	-- -16	-- L16	-16 --
1.250-12UNJF	2.144	1.440	.150	-20	L20	--
1.500-12UNJF	2.571	1.720	.180	-24	L24	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

TABLE III. (260KSI, 450°F)

Material				Steel, Alloy	
Protective Finish				Cadmium Plate	
Lubricant				Non-Dry	Dry
T-Thread (-3B)	∅A Max	H Max	V Min	MS21085 + Dash No.	
.190-32UNJF .250-28UNJF .3125-24UNJF	.377 .481 .588	.250 .315 .405	.025 .033 .041	-03 -04 -05	L03 L04 L05
.375-UNJF .4375-20UNJF .500-20UNJF .5625-18UNJF	.701 .821 .933 1.041	.490 .570 .650 .730	.049 .057 .065 .073	-06 -07 -08 -09	L06 L07 L08 L09
.625-18UNJF .750-16UNJF .875-14UNJF 1.000-12UNJF	1.514 1.375 1.592 1.810	.810 .980 1.140 1.300	.081 .098 .114 .130	-10 -12 -14 -16	L10 L12 L14 L16

TABLE IV. (220KSI, 800°F)

Material				Inconel 718
Protective Finish				Nickel Undercoat
Lubricant				Dry Film
T-Thread (-3B)	∅A Max	H Max	V Min	MS14182 + Dash No.
.190-32UNJF	.362	.220	.023	-L03
.250-28UNJF	.460	.290	.033	-L04
.3125-24UNJF	.563	.360	.038	-L05
.375-24UNJF	.669	.430	.045	-L06
.4375-20UNJF	.778	.500	.053	-L07
.500-20UNJF	.879	.575	.060	-L08
.5625-18UNJF	.982	.650	.068	-L09
.625-18UNJF	1.088	.720	.075	-L10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2601
NUT, SELF-LOCKING, SLOTTED HEXAGON

APPLICABLE DOCUMENTS: MS17825, MS17826, MS21225

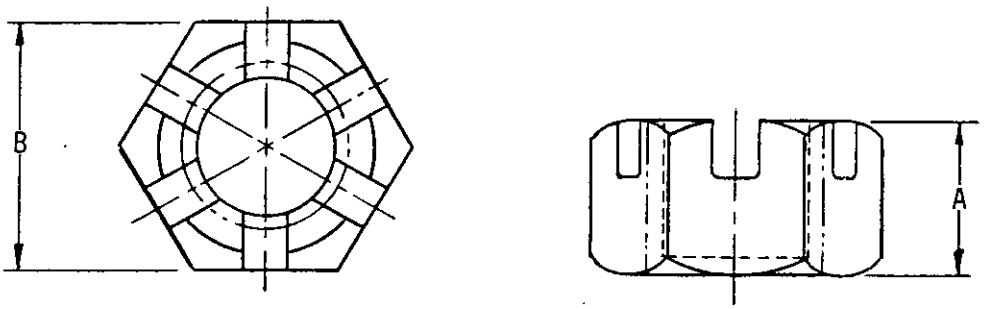


TABLE I

Material ----------			Steel		CRES
Performance: Temperature --------			250°F		800°F
Protective finish ----------			Cadmium plate		Silver plate
Thread (-3B)	A Max	B Nom	MS17826 + Dash no.	MS17825 + Dash no.	MS21225 + Dash no.
.190-32UNJF	.203	.375	-3	--	--
	.265		--	-3	-3
.250-28UNJF	.203	.438	-4	--	--
	.296		--	-4	-4
.3125-24UNJF	.203	.500	-5	--	--
	.343		--	-5	-5
.375-24UNJF	.234	.562	-6	--	--
	.421		--	-6	-6
.4375-20UNJF	.234	.688	-7	--	--
	.468		--	-7	-7
.500-20UNJF	.265	.750	-8	--	--
	.578		--	-8	-8
.625-18UNJF	.328	.938	-10	--	--
	.734		--	-10	--
.750-16UNJF	.390	1.062	-12	--	--
	.828		--	-12	--
.875-14UNJF	.453	1.250	-14	--	--
	.921		--	-14	--
1.000-12UNJF	.515	1.438	-16	--	--
	1.015		--	-16	--
1.125-12UNJF	.578	1.625	-18	--	--
	1.171		--	-18	--
1.250-12UNJF	.640	1.812	-20	--	--
	1.265		--	-20	--

Note: MS17825 & MS17826 have non-metallic insert (nylon or equal) as locking feature.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2602

NUT, SELF-LOCKING, SLOTTED, HEXAGON (LIGHTWEIGHT), 450°F

APPLICABLE DOCUMENTS: MS14144, MS14145

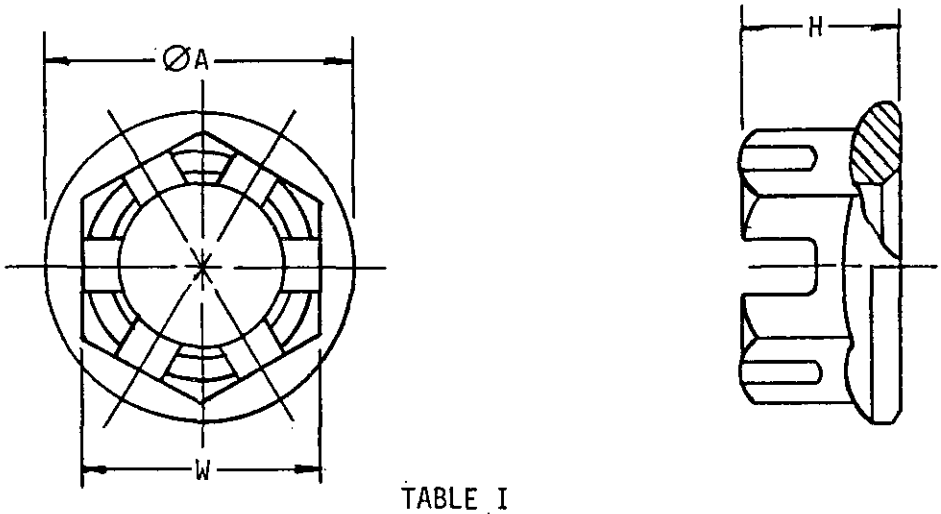


TABLE I

Material				Steel				Cotter pin size (Ref)
Protective finish				Cadmium plate				
Lubricant				Non-dry	Dry	Non-dry	Dry	
Thread size (-3B)	ØA Max	H Max	W Nom	MS14145 (thin) + Dash no.		MS14144 (reg.) + Dash no.		
.190-32UNJF	.325	.203	.250	-3	-L3	--	--	3/64
		.265		--	--	-3	-3L	
.250-28UNJF	.420	.203	.312	-4	-L4	--	--	1/16
		.296		--	--	-4	-4L	
.3125-24UNJF	.520	.203	.375	-5	-L5	--	--	1/16
		.343		--	--	-5	-5L	
.375-24UNJF	.579	.234	.438	-6	-L6	--	--	3/32
		.421		--	--	-6	-6L	
.4375-20UNJF	.645	.234	.500	-7	-L7	--	--	3/32
		.468		--	--	-7	-7L	
.500-20UNJF	.770	.265	.562	-8	-L8	--	--	3/32
		.578		--	--	-8	-8L	
.625-18UNJF	.910	.328	.750	-10	-L10	--	--	1/8
		.734		--	--	-10	-10L	
.750-16UNJF	1.130	.390	.875	-12	-L12	--	--	1/8
		.828		--	--	-12	-12L	
.875-14UNJF	1.345	.452	1.000	-14	-L14	--	--	1/8
		.921		--	--	-14	-14L	
1.000-12UNJF	1.545	.515	1.125	-16	-L16	--	--	1/8
		1.015		--	--	-16	-16L	
1.125-12UNJF	1.745	.578	1.250	-18	-L18	--	--	1/8
		1.171		--	--	-18	-18L	
1.250-12UNJF	1.915	.640	1.375	-20	-L20	--	--	1/8
		1.265		--	--	-20	-20L	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2701
NUT, SELF-LOCKING, SPLINE
APPLICABLE DOCUMENT: MS51866

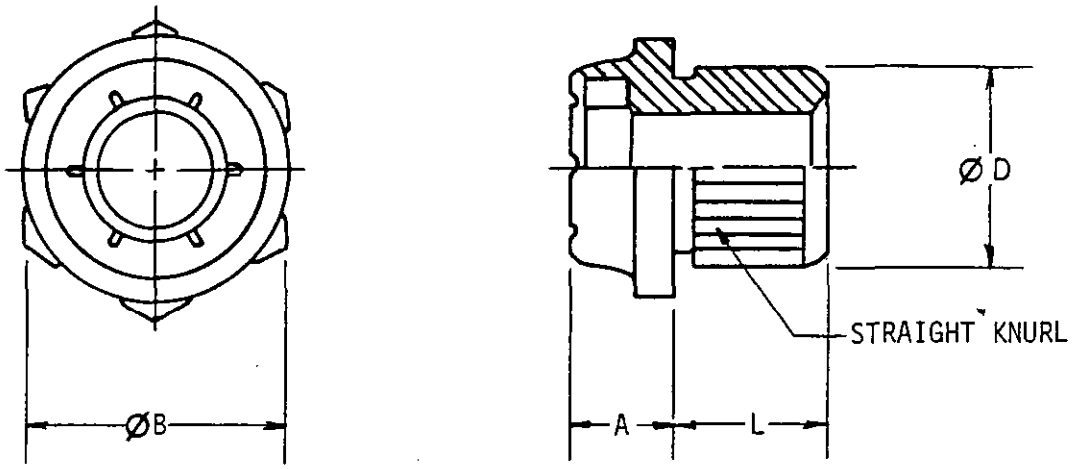


TABLE I

Material					Carbon Steel	Aluminum Alloy	Brass	CRES
Protective finish					Cadmium plate	Anodize	Uncoated	Passivate
Thread	A Nom	ØB Nom	ØD Max	L Nom	MS51866 + Dash no.			
.164-32UNC-3B	.172	.438	.325	.125	-1	-1A	-1B	-1C
				.188	-3	-3A	-3B	-3C
.190-32UNF-3B	.172	.438	.325	.125	-8	-8A	-8B	-8C
				.188	-10	-10A	-10B	-10C
				.313	-14	-14A	-14B	-14C
.250-28UNF-3B	.188	.563	.388	.188	-18	-18A	-18B	-18C
				.250	-20	-20A	-20B	-20C
				.375	-23	-23A	-23B	-23C
.3125-24UNF-3B	.234	.625	.450	.188	-27	-27A	-27B	-27C
				.250	-29	-29A	-29B	-29C
				.375	-32	-32A	-32B	-32C
.375-24UNF-3B	.281	.688	.513	.188	-35	-35A	-35B	-35C
				.250	-37	-37A	-37B	-37C
				.375	-39	-39A	-39B	-39C
.500-20UNF-3B	.375	.875	.700	.375	-47	-47A	-47B	-47C
				.438	-48	-48A	-48B	-48C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2801
NUT, SHEET SPRING (CLIP-IN TYPE)

APPLICABLE DOCUMENT: MS33737

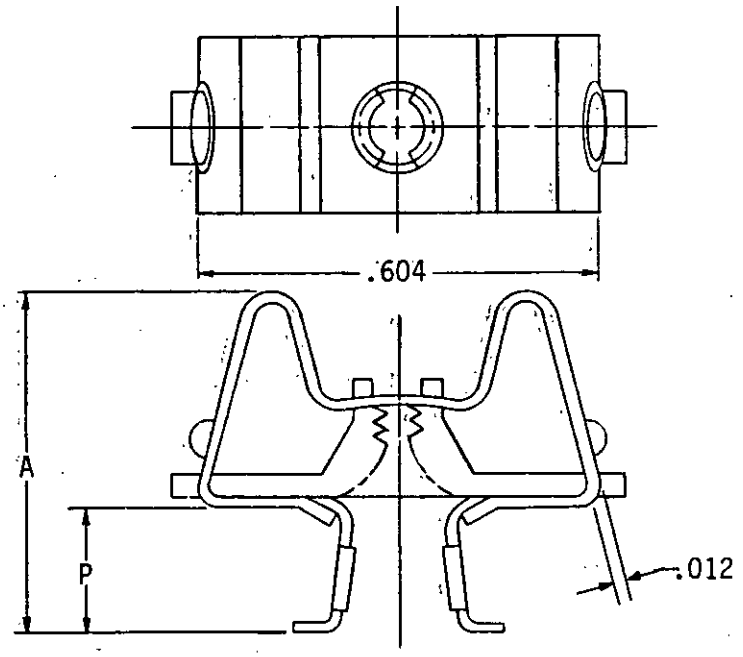


TABLE I

Material ------	Cage ----------		Phosphor bronze
	Nut ----------		Brass
Thread	A Nom	P Nom	MS33737 + Dash no.
.112-40UNC-2B	.438	.062	-1
	.469	.093	-2
	.500	.125	-3
	.562	.187	-4
	.625	.250	-5
	.688	.312	-6
	.750	.375	-7
		Over .375	-8
.138-32UNC-2B	.438	.062	-9
	.469	.093	-10
	.500	.125	-11
	.562	.187	-12
	.625	.250	-13
	.688	.312	-14
	.750	.375	-15
		Over .375	-16

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2802

NUT, SHEET, SPRING - FLAT TYPE

APPLICABLE DOCUMENT: NAS 446


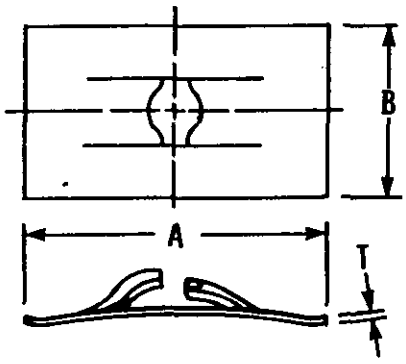


TABLE I


Material ----------				Steel, Tempered	
Protective Finish ----------				Zinc Chromate Primer Suffix (-1)	Zinc Metal Spray Suffix (-3)
For Screw Size	A Nom	B Nom	T Nom	NAS 446 + Dash No.	
4Z	.500	.312	.022	-1	
6Z	.515	.312	.025	-2	
8Z	.625	.437	.028	-4	
10Z	.875	.500	.031	-5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2803
NUT, SHEET SPRING, "J" TYPE
APPLICABLE DOCUMENT: MS90723





AF



AEH

STYLES

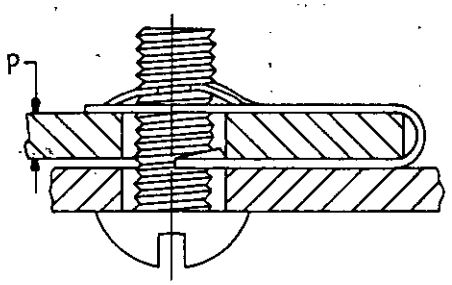

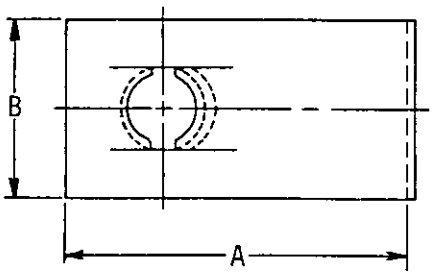





TABLE I

Material ----------					Spring steel	
Protective finish ----------					Cadmium plate	
Screw size	Style	A Nom	B Nom	C Nom	P .025 - .040	P .045 - .062
					MS90723 + Dash no.	
.138-32	AEH	.469	.500	.017	-1	-23
	AF	.625	.312		-2	-24
	AF	.812	.312		-3	-25
.164-32	AEH	.531	.500	.017	-7	-29
	AF	.688	.406		-8	-30
	AF	.875	.406		-9	-31
.190-24	AEH	.594	.625	.022	-13	-36
	AF	.781	.375		-14	-37
	AF	.969	.375		-15	-38

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2804
NUT, SHEET SPRING, "U" TYPE
APPLICABLE DOCUMENT: MS90724

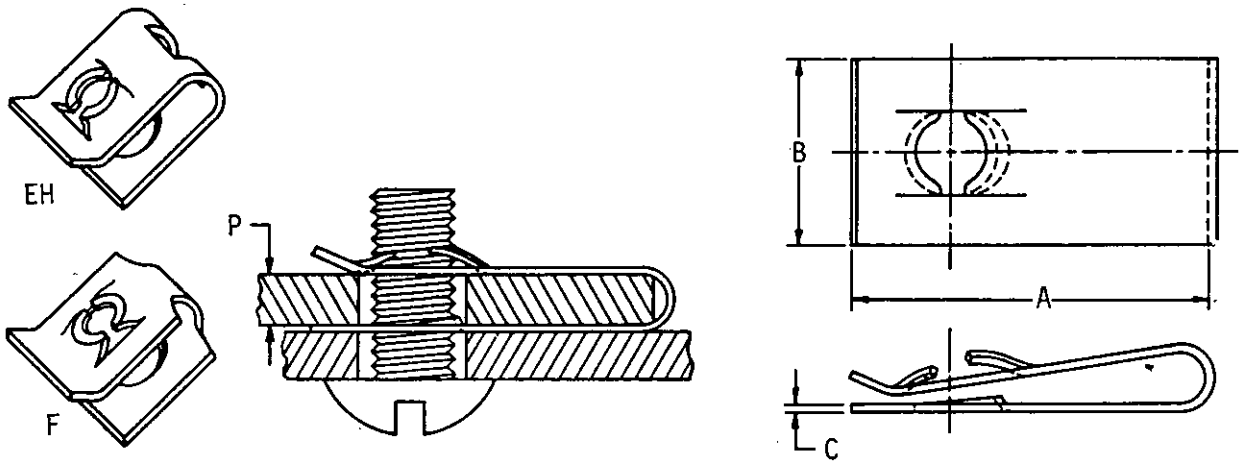

STYLES

TABLE I


Material ----------					Spring steel	
Protective finish ----------					Cadmium plate	
Screw size	Style	A Nom	B Nom	C Nom	P .025-.040	P .045-.062
					MS90724 + Dash no.	
.138-32	EH	.484	.500	.017	-1	-23
	F	.656	.312		-2	-24
	F	.828	.312		-3	-25
.164-32	EH	.531	.500	.017	-7	-29
	F	.688	.406		-8	-30
	F	.875	.406		-9	-31
.190-24	EH	.578	.625	.022	-13	-35
	F	.766	.375		-14	-36
	F	.969	.375		-15	-37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2805

NUT, SHEET SPRING, "U" TYPE, SELF-LOCKING

APPLICABLE DOCUMENT: AS3261

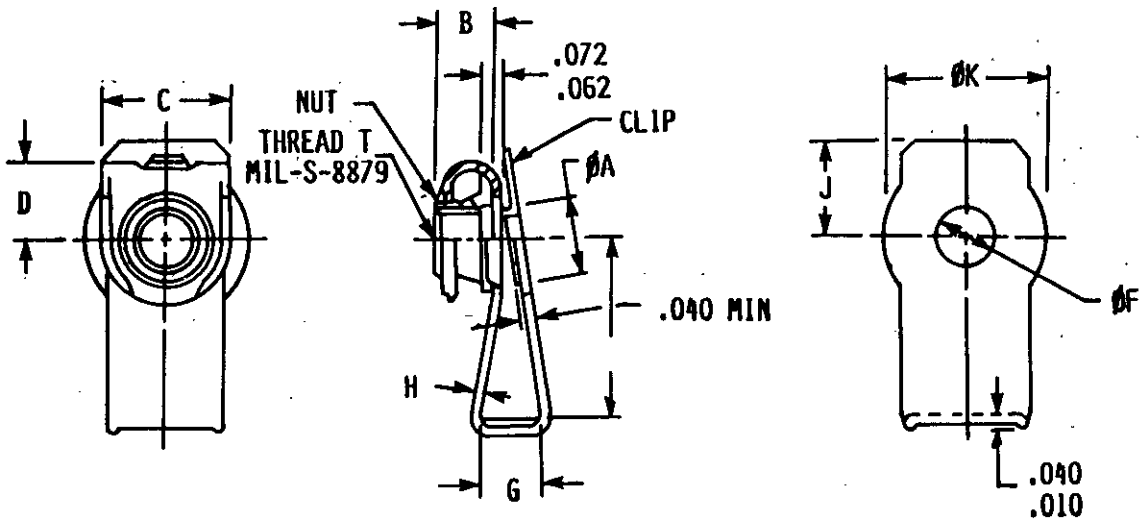

NOTE: REFERENCE MOUNTING SHEET THICKNESS .030-.090


TABLE I

Material	CRES
Protective Finish	Silver Plate

T Thread	ØA Max	B Max	B Min	C Max	C Min	D Max	D Min	ØF Min	G Max	G Min	H Max	H Min	J Max	J Min	ØK Max	ØK Min	AS3261 + Dash No.
.190-32UNJF-3B	.218	.184	.169	.380	.360	.225	.205	.193	.120	.090	.023	.017	.285	.265	.505	.475	-01
.250-28UNJF-3B	.305	.251	.236	.500	.480	.336	.285	.255	.120	.090	.028	.022	.370	.370	.715	.685	-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

SECTION 2901
NUT, STAMPED
APPLICABLE DOCUMENT: MS27151

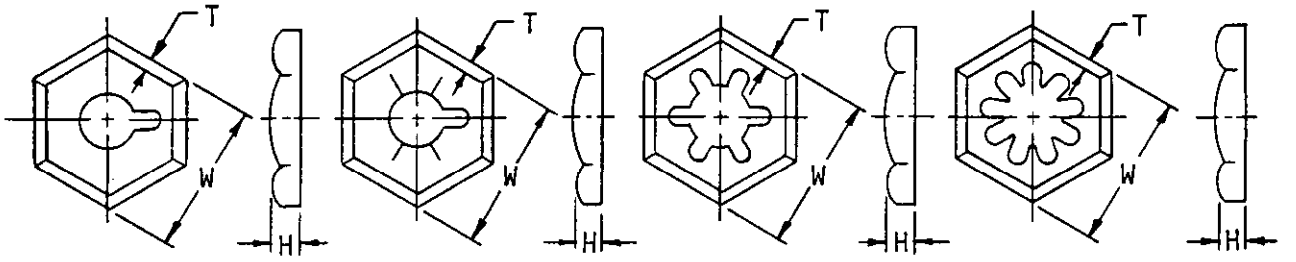

TYPE I
1-NOTCH

TYPE II
1-NOTCH, 5-SLITS

TYPE III
6-NOTCHES

TYPE IV
9-NOTCHES

TABLE I

Material	Carbon steel
Protective finish	Cadmium plate
Rockwell hardness	30N-56-66


Thread	Thread designation	Series	Type	W Max	H Nom	T Nom	MS27151 + Dash no.
.112	40UNC	Mach screw	I	.250	.076	.011	-2
.138	32UNC	Mach screw	II	.312	.092	.013	-5
.164	32UNC	Mach screw	II	.344	.099	.013	-6
.190	32UNC	Mach screw	II	.375	.105	.013	-7
	24UNF	Mach screw	II	.375	.105	.017	-8
.250	20UNC	Regular	III	.438	.123	.021	-12
	28UNF	Regular	III	.438	.118	.016	-13
.3125	18UNC	Regular	III	.500	.134	.021	-15
	24UNF	Regular	IV	.500	.129	.019	-16
.375	16UNC	Regular	III	.562	.145	.021	-18
	24UNF	Regular	IV	.562	.140	.019	-19
.500	13UNC	Regular	III	.750	.179	.027	-23
	20UNF	Regular	IV	.750	.172	.023	-24
.625	11UNC	Regular	III	1.000	.224	.035	-27
	18UNF	Regular	IV	.938	.203	.024	-28
.750	10UNC	Regular	III	1.125	.246	.038	-30
	16UNF	Light	IV	1.062	.225	.027	-31
.875	9UNC	Regular	III	1.312	.280	.042	-33
	14UNF	Light	IV	1.250	.256	.030	-34
1.000	8UNC	Heavy	III	1.625	.336	.049	-35
	12UNF	Light	III	1.438	.280	.030	-37

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:55Z
Check the source to verify that this is the currentversion before use.

SECTION 3001

PUSH-ON NUT

APPLICABLE DOCUMENT: MS51857

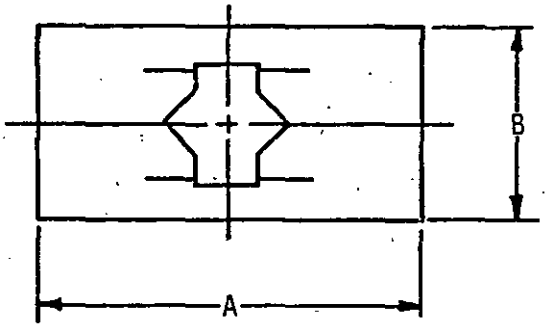

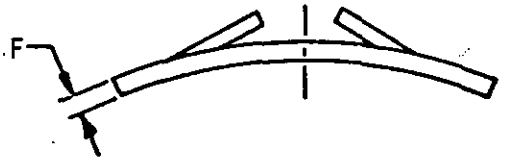


TABLE I

Material	Spring steel
Protective finish	Cadmium plate
Rockwell hardness	C44-50

Stud size	Series 1/	A Nom	B Nom	F Nom	MS51857 + Dash no.
.125	Light	.58	.31	.012	-1
	Medium			.014	-2
	Heavy			.017	-3
.1875	Light	.62	.38	.012	-4
	Medium			.017	-5
	Heavy			.020	-6
.250	Light	.62	.44	.012	-7
	Medium			.017	-8
	Heavy			.020	-9
.3125	Light	.69	.50	.014	-10
	Medium			.020	-11
.375	Light	.75	.56	.014	-12
	Medium			.020	-13

1/ Light series nuts are for use on plastic studs; Medium series on soft metal studs and heavy series on hardened studs.

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 604-033/10589

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
US Army Armament Research,
Development and Engineering Center
ATTN: SMCAR-ESC-S
Picatinny Arsenal, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-1903	Nuts Preferred for Design, Listing of

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:55Z
Check the source to verify that this is the current version before use.