MIL-STD-2115

25 March 1982

MILITARY STANDARD

AUDIO DEVICES AND COMPONENTS, SELECTION AND USE OF

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D.C. 20301

Audio Devices and Components, Selection and Use of MIL-STD-2115.

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, ATTN: ELEX-8111, Washington, D.C. 20360 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FOREWORD

This standard provides selected standard audio devices and components for use in the design of military equipment.

The application information contained in this standard is offered for guidance only and is not to be considered as mandatory. Additional application information will be added when coordinated with the three military departments

Additional sections of this standard will be developed as the standard audio devices or components of a family are selected and coordinated with the three military departments

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	Scope	1
	1.2	Purpose of standard	1
	2	REFERENCED DOCUMENTS	2
	3.	DEFINITIONS (not applicable)	3
	4.	GENERAL REQUIREMENTS	4
	4.1	Choice of audio components	4
	4.2	Conflict of requirements	4
	4.3	Criteria for inclusion in this standard	4
	5	DETAILED REQUIREMENTS	5
	6.	SUPPLEMENTAL INFORMATION	6
	6.1	Drawing notes	6
	6.2	Drawing configurations	6

SECTIONS

Section	100	LOUDSPEAKERS	100 1
	101	Loudspeaker, Permanent Magnet, Cone Type	101 1
	102	Loudspeaker, Horn Type	102 1
	200	MICROPHONES	200 1
	201	Microphones	201 1
	300	HANDSETS	300 1
	301	Handset	301 1
	400	HEADSETS	400 1
	401	Headset	401 1
	402	Headset-Microphones	402 1
	403	Headset-Chest sets	403 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

CROSS REFERENCE
(Section Number to Specification Number)

Section		Applicable specifications
101	Loudspeaker, Permanent Magnet, Cone Type	MIL-L-10911 MIL-L-12606 MIL-L-12632 MIL-L-17061 MIL-L-17080 MIL-A-20222 MIL-L-24296 Navy drawings RE49C724A RE49C764
102	Loudspeaker, Horn Type	MIL-L-13941 MIL-L-25547
201	Microphones	MIL-M-11101 MIL-M-23813 MIL-M-26542 MIL-M-49199 MIL-E-55119
301	Handsets	MIL-H-11996 MIL-H-49078(EL) Navy drawing RE-51-128E
401	Headsets	MIL-H-27467 MIL-E-55119 MIL-H-55353 MIL-H-83511
402	Headset Microphones	MIL-H-49198 MIL-H-55460 MIL-H-83511
403	Headset Chest Sets	MIL-T-15514

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

1. SCOPE

1 1 Scope. This standard consists of the following

a. Selected standard audio components chosen jointly by the Departments of the Army, the Navy, and the Air Force for use in the design and manufacture of military equipment under the jurisdiction of the Department of Defense

b Guides for the choice and application of audio components for use in military equipment.

Detailed requirements for audio components listed in this standard are covered in the applicable specification sheets or drawings (see 2 1) (The complete part number or type designation, and the number of the applicable specification sheet or drawings should be referenced in procurement documents for the audio components.

1 2 Purpose of standard

a Provide the equipment designer with a selection of audio components that are considered to be the most flexible for military applications

b Control and minimize the variety of audio components used in military equipment in order to facilitate logistic support of the equipment in the field

c. Establish criteria pertinent to the choice, application, and use of audio components in military equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government documents The following documents form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-L-10911	-	Loudspeakers, Permanent Magnet, (Unencased, 5-,6-,8-,10-, and 12-Inch Diameter Cones), General Specification For
MIL-M-11101	-	Microphones, Dynamic
MIL-H-11996	-	Handsets, General Specification For.
MIL-L-12606	-	Loudspeaker, Permanent Magnet (Unencased, 3-Inch and 4-Inch Diameter Cone, 2-Watt, Fungus-, Gunblast-, and Immersion-Resistant), Type LS-445/U, M12606-01, and M12606-02).
MIL-L-12632	-	Loudspeakers, Permanent Magnet (Encased, 2-Watt, Fungus-, Gunblast-, and Immersion-Resistant), General Specification For.
MIL-L-13941	-	Loudspeakers, Permanent Magnet, (Dynamic, Horn Type), General Specification For
MIL-T-15514(NAVY)	-	Telephone Equipment, Sound Powered Handsets, Headset-Chest Sets, and Headset-Microphones, Types H-200/U, H-201/U, H-202/U, H-203/U, and H-204/U
MIL-L-17061(SHIPS)	-	Loudspeaker, Permanent Magnet, LS-474/U
MIL-L-17080	-	Loudspeakers, Permanent Magnet For Shipboard Entertainment Systems.
MIL-A-20222	-	Announcing-Equipment, Shipboard
MIL-M-23813(SHIPS)	-	Microphones, Intercommunication and Announcing Systems, Naval Shipboard
MIL-L-24296(SHIPS)	-	Loudspeaker, Pressure Proof, Type LS-405()/B
MIL-L-25547	-	Loudspeaker, Permanent Magnet LS-211/AIC-13
MIL-M-26542	-	Microphones, General Specification For
MIL-H-27467(USAF)	-	Headset, Electrical, H-154/AIC
MIL-H-49078(EL)	-	Handset, H-250()/U
MIL-H-49198	-	Headset-Microphone Kit, MK-1564()/AIC
MIL-H-49199	-	Microphone, Linear, M-162/AIC
MIL-E-55119(EL)	-	Electro-Acoustical Transducer Equipment.
MIL-H-55353	-	Headset, Electrical, H-216A/U
MIL-H-55460(EL)	-	Headset-Microphone H-182()/PT
MIL-H-83511	-	Headset-Microphone and Headset-Electrical (Medium Noise Attenuation, Hearing Protective), General Specification For

DRAWINGS

NAVY

RE49C724	-	Loudspeaker, Permanent Magnet, LS-455/U
RE49C764	-	Loudspeaker, Permanent Magnet, NT-491814
RE-51-128E	-	Handset, H-169/U

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

3 DEFINITIONS

Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Choice of audio components. The equipment designer should consider the following characteristics and parameters in choosing the most suitable audio component

a. Application (type of audio component (eg loudspeaker vs headset).
b Electrical data (frequency response, etc.)
c. Environmental capabilities such as shock and vibration
d. Mechanical data and safety features.

4.1 1 Procurement information. After a preliminary selection of the desired audio component has been made, reference should be made to the applicable specification. Procurement documents for audio components shall reference the applicable specification sheet or drawings and the complete part number, style, or type designation

4.2 Conflict of requirements After selection of a particular audio component from this document, the design engineer should refer to the applicable specification sheet or drawing for any technical conflicts. In the event of a conflict between the technical requirements described in this standard and those of the applicable specification sheet or drawing, the latter shall govern.

4.3 Criteria for inclusion in this standard. The criteria for the inclusion of audio components in this standard are as follows:

a. The audio component shall be the best type available for general use in military equipment
b. The audio components shall be reviewed and coordinated for acceptance as a standard item by the three military departments.
c. Coordinated military specifications shall be available (see 2.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for standard audio components are contained in the applicable specification and the applicable section of this standard

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

6. SUPPLEMENTAL INFORMATION

6.1 Drawing notes. The following notes are applicable to each figure contained in this standard:

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

6.2 Drawing configurations. The drawings in this standard are typical and are not necessarily the exact configuration for each item.

Custodians.
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy -
Air Force - 11, 99
DLA - ES

User activities:
Army - CE
Navy - SH
Air Force -

Agent.
DLA - ES

Preparing activity
Navy - EC

(Project 5965-0159)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 100

LOUDSPEAKERS

Section


101 Loudspeaker, Permanent Magnet, Cone Type.

102 Loudspeaker, Horn Type

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 101

LOUDSPEAKER, PERMANENT MAGNET, LS-166/U
(APPLICABLE SPECIFICATION MIL-L-12632)

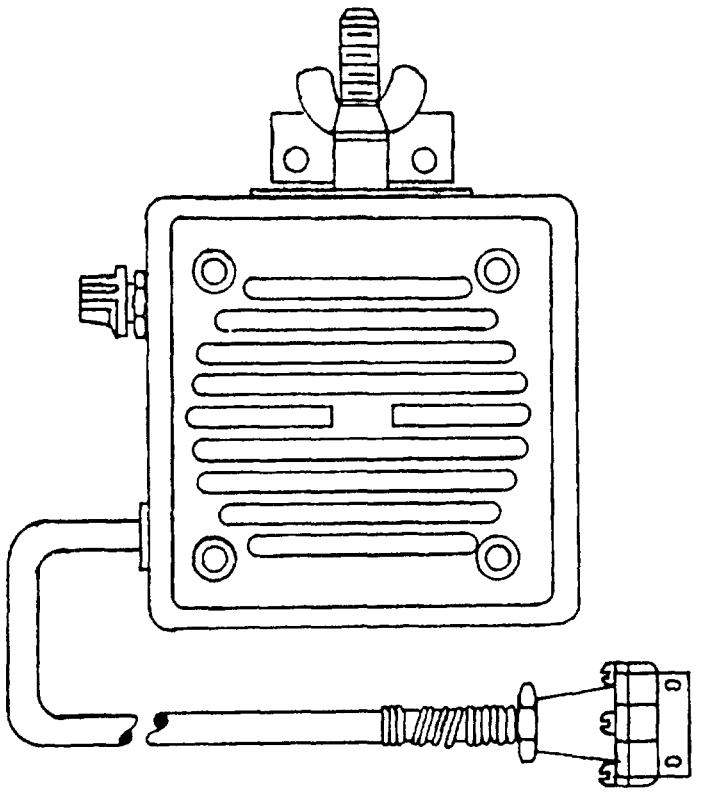

FUNCTIONAL DESCRIPTION

The LS-166/U is a four inch, direct radiator, dynamic type loudspeaker It is housed in a metal inclosure and is resistant to weather, gunblast, immersion, humidity, temperature extremes, and bounce. The unit is intended for use with ground service tactical equipments where resistance to gun fire and immersion are requirements.

CONSISTS OF:

1 Permanent Magnet Loudspeaker LS-445/U
1 Cable CX-1576/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION

Cone Diameter	4 inches (101.60 mm)
Mounting Dimensions	Adjustable mounting bracket with two 9/32 inch diameter holes spaced 1-1/2 inch C to C
Plug	U-77/U

Over-all Dimensions:

Length	7.031 inches (178.59 mm)
Width	5.656 inches (143.66 mm)
Depth	3.312 inches (84.12 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL PHYSICAL DATA:

Case Material . . . . . Metal

TECHNICAL DESCRIPTION:

INPUT
Voice coil impedance . . . . 8 ohms
Power handling rating . . . 2 watts (warble tones)
Frequency range . . . . . 300 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Data . . . . . 600 ohms primary impedance

Environmental Data:

Operating Conditions:

Temperature . . . . . From -65° to +160°F
Elevation . . . . . 5,000 feet above sea level
Relative Humidity . . . . 95 percent

Nonoperating Conditions:


Temperature . . . . . From -80° to +160°F for 72 hours
Elevation . . . . . 50,000 feet above sea level
Relative Humidity . . . . 100 percent
Blast . . . . . In accordance with MIL-L-12606
Immersion . . . . . In accordance with MIL-L-12606
Bounce . . . . . In accordance with MIL-L-12606

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-166/U
80063	LS-166/U
87771	LS-166/U
84792	LS-166/U
04848	6420-A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-180/U
(APPLICABLE SPECIFICATION MIL-L-10911)

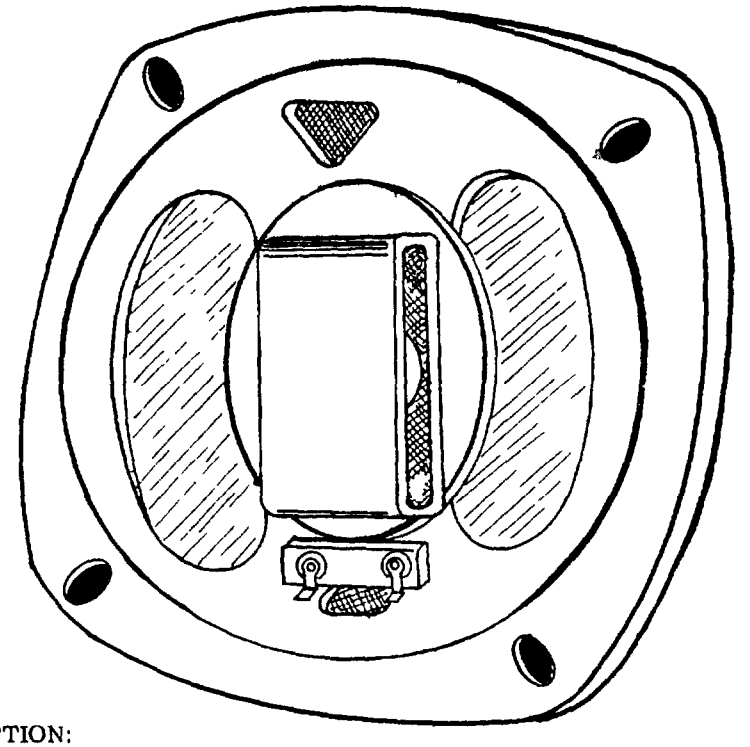

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. This speaker is moisture, vibration, and shock resistant.

CONSISTS OF

1	Loudspeaker, Permanent Magnet	LS-180/U

RELATIONSHIP TO SIMILAR EQUIPMENT

PHYSICAL DESCRIPTION

Diameter	8 inches (203 20 mm)
Mounting dimensions	Four 0.200 x 0.375 inch mounting slots spaced 90 degrees apart on 7.625 inch diameter.
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions

Diameter	8.44 inches maximum (214.38 mm)
Depth	5 inches maximum (127.00 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - - -	8 ±1 ohms
Power handling rating - - - - - - - - -	5 watts peak - 10 watts
Frequency range- - - - - - - - - - - - -	150 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:


Temperature range (Nonoperating) - - -	-65° to +160°F

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-180/U
81349	LS-180/U
04848	LS-180/U
84792	LS-180/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-305/LS-306(SIC)
(APPLICABLE SPECIFICATION: MIL-A-20222)

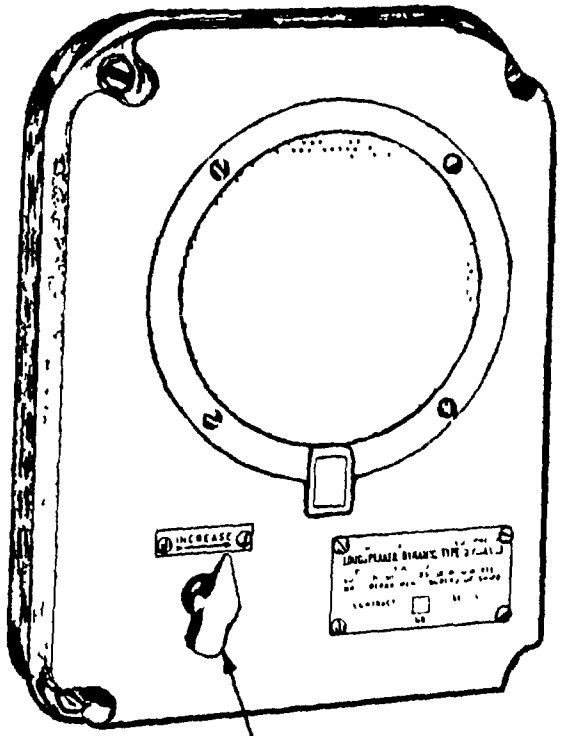

FUNCTIONAL DESCRIPTION:

The LS-305( )/SIC and LS-306( )/SIC are low power loudspeakers intended for reproduction of speech and alarm signals in sheltered areas of ships, such as living spaces, in which the noise level is comparatively low.

CONSISTS OF:

1 Loudspeaker, Dynamic LS-305( )/SIC or LS-306( )/SIC

RELATIONSHIP TO SIMILAR EQUIPMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Nominal Diameter - - - - - - - - - - - - - - - 11 inches (279.4 mm)

Over-all Dimensions:


Length - 10.938 inches (277.83 mm)
Width - 8.25 inches (209.55 mm)
Depth - 4.438 inches (112.73 mm)

Mounting Dimensions.

Refer to the following figure, arrangement of mounting holes:

Weight - 6 lbs. est.

ARRANGEMENT OF MOUNTING HOLES:

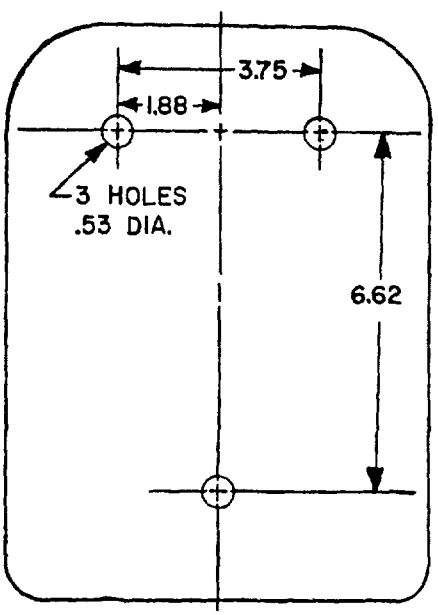

ADDITIONAL PHYSICAL DATA:

Case Material: Aluminum
Finish: Alkyd Resin Enamel, Light Navy Gray

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - - - - - 7 ohms
Power handling rating - - - - - - - - - - - Not rated
Frequency range- - - - - - - - - - - - - - - 200 to 8,000 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL TECHNICAL DATA·

Transformer Data·

The liner transformer is tapped to allow use with either a 50 to 70 volt audio line
The input impedances available at the 70 volt tap at one kilocycle per second are 5200, 16,900, 41,900, 59,200, 71,000 ohms
The input impedances at the 50 volt tap at one kilocycle are 2600, 8200, 20,400, 29,200; 35,500 ohms.

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
32001	LS-305( )/SIC or LS-306( )/SIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-444/WIH
(APPLICABLE SPECIFICATION, MIL-L-17080)

No illustration available

FUNCTIONAL DESCRIPTION:

The LS-444/WIH is a direct radiator, permanent magnet type loudspeaker. The unit is furnished with a matching transformer and controls within an enclosure. The loudspeaker is intended for use with Naval motion picture and entertainment installations.

CONSISTS OF:

1 Permanent Magnet Loudspeaker LS-444/WIH

Including:

1 Channel Selector
1 Volume Control
1 Transformer

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to LS-443/WIH

PHYSICAL DESCRIPTION:

Diameter	8 inches (203.20 mm)
Mounting Dimensions	Three 1/2 inch (12.70 mm) diameter mounting holes on isoscelese triangle with 8-3/4 inch (222.25 mm) base and 8 inch (203.2 mm) altitude.

Over-all Dimensions:

Length	15 inches (381.00 mm)
Width	9 inches (228.60 mm)
Height	15 inches (381.00 mm)

ADDITIONAL PHYSICAL DATA:

Material of Enclosure	Metal or fibrous glass reinforced polyester plastic

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms
Power handling rating	5 watts (warble tones)
Frequency range	120 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer Winding Data	Primary winding tapped at, 5 volt-amperes, 2 5 VA, 1.25 VA, .63 VA, .31 VA, .15 VA with a 8 ohm resistive load and a 70 7 volt line Secondary winding tapped at, 5 VA, 1 25 VA, and 31 VA with an 8 ohm resistive load and 70 7 V applied to the 5 VA Primary winding
Channel Selector	5 positions. It will be so connected that it will switch its two output leads to any one of 4 separate inputs. The unconnected position shall be at the CCW end and marked "OFF"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.


Volume Control _ _ _ _ _ _ _ _ _ _ _ _ _ _ 6 Positions. It will connect one lead from the channel selector to the various taps of the line-to-voice coil transformer.

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80064	LS-444/WIH
81349	LS-444/WIH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-445/U
(APPLICABLE SPECIFICATION. MIL-L-12606)

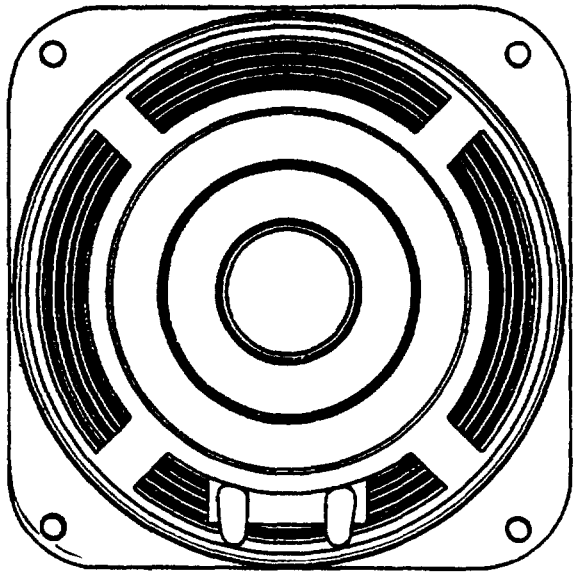

FUNCTIONAL DESCRIPTION.

Loudspeaker LS-445/U is an unencased, 2-watt, gunblast and immersion resistant permanent magnet type loudspeaker unit It has a 4-inch diameter cone with a voice coil impedance of 8 ohms

CONSISTS OF:

1 Permanent Magnet Loudspeaker LS-445/U

RELATIONSHIP TO SIMILAR EQUIPMENT.

This is the loudspeaker unit of LS-454/U, LS-166/U and LS-590 ( )/U.

PHYSICAL DESCRIPTION:

Diameter - 4 inches (101 60 mm)

Mounting Dimensions:

Four number 10 - 24 thd tapped holes on 3-5/16 inch by 3-5/16 inch mounting centers.

Terminal/Connector Designation - - - - - Two Solder Type terminals

Over-all Dimensions:

Length - - - - - - - - - - - - - - - - - - - 4 inches (101.60 mm)
Width - 4 inches (101.60 mm)
Depth - 2.375 inches (maximum) (60.33 mm)
Weight - 1/2 pounds

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ±1 ohms
Power handling rating	2 watts, normal
Frequency range	300 to 7,000 Hz

ADDITIONAL TECHNICAL DATA

Environmental Service


Temperature	-80° to +160°F
Moisture	Resistant
Immersion	3 feet of tap water for 24 hours
Bounce	In accordance with MIL-L-12606
Fungus	Treated for moisture and fungus resistance
Gunblast	In accordance with MIL-L-12606 and SK-N-864
Shock	In accordance with MIL-S-901
Endurance	100 Hrs

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80063	LS-445/U
32001	P4-SB-2
87771	LS-445/U
84792	H-400
04848	7604-A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-446/U
(APPLICABLE SPECIFICATION MIL-L-10911/2)

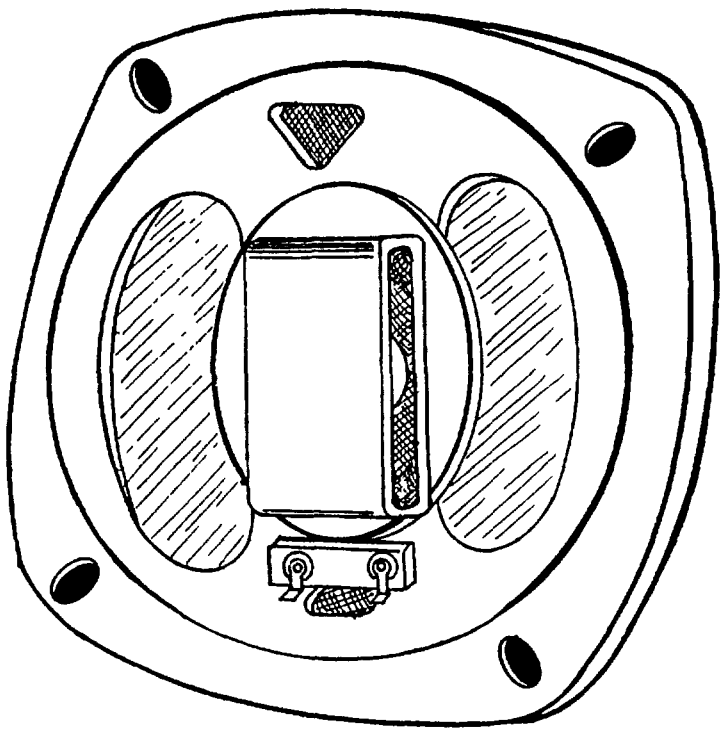

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. This speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-446/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	6 inches (152.4 mm)
Mounting dimensions	Four 0.200 x 0.375 inch mounting slots spaced 90 degrees apart on 6.125 inch (155.58 mm) diameter.
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions:

Diameter	6.94 inches maximum (176.28 mm)
Depth	3.38 inches maximum (85.85 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - - - - 3 to 4.5 ohms (3.2 ohms nominal)
Power handling rating - - - - - - - - - - - 5 watts rms, peak - 8 watts rms.
Frequency range - - - - - - - - - - - - - 150 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL SERVICE:


Temperature range (nonoperating)- - - - - -65° to +160°F
Moisture resistance - - - - - - - - - - - - In accordance with MIL-L-10911
Vibration - - - - - - - - - - - - - - - - - In accordance with MIL-L-10911
Endurance - - - - - - - - - - - - - - - - - In accordance with MIL-L-10911

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-446/U
81349	LS-446/U
04848	LS-446/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-447/U
(APPLICABLE SPECIFICATION MIL-L-10911/4)

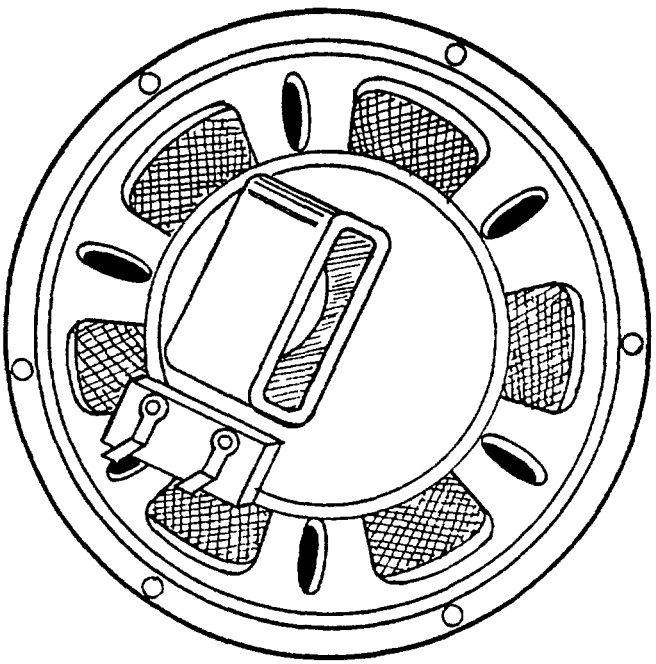

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. This speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-447/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	10 inches (254.0 mm)
Mounting dimensions	Eight 0.218 x 0.375 inch mounting slots spaced 45 degrees apart on 9.625 inches (244.48) diameter.
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions:

Diameter	10.25 inches maximum (260.35 mm)
Depth	6 inches maximum (152.4 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - -	3 to 4.5 ohms (3.20 ohms nominal)
Power handling rating - - - - - - - -	10 watts rms; peak - 20 watts
Frequency range - - - - - - - - - - -	150 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL SERVICE


Temperature range (nonoperating) - -	-65° to +160°F
Moisture resistance- - - - - - - - - -	In accordance with MIL-L-10911
Vibration- - - - - - - - - - - - - - -	In accordance with MIL-L-10911
Endurance- - - - - - - - - - - - - - -	In accordance with MIL-L-10911

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-447/U
81349	LS-447/U
04848	LS-447/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-448/U
(APPLICABLE SPECIFICATION· MIL-L-10911/5)

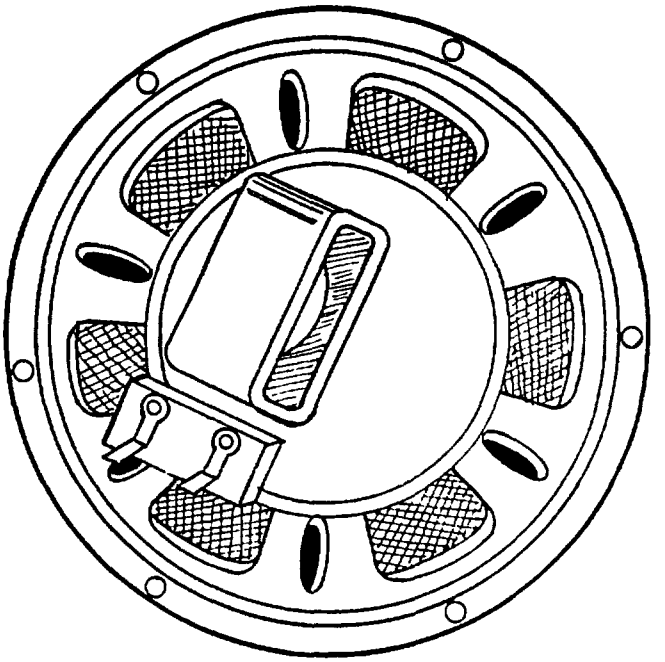

FUNCTIONAL DESCRIPTION:

This unit is a permanent magnet unencased loudspeaker. It is capable of withstanding extreme temperature changes. The unit is rugged and light, and is designed for general purpose use. The speaker is moisture, vibration, and shock resistant.

CONSISTS OF:

1	Loudspeaker, Permanent Magnet	LS-448/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Diameter	12 inches (304.8 mm)
Mounting dimensions	Eight 0.250 x 0.375 inch mounting slots spaced 45 degrees apart on 11.562-inch (293.67 mm) diameter
Terminal/connector designation	Two solder lug type on terminal board

Overall dimensions:

Diameter	12.25 inches maximum (311.15 mm)
Depth	6.50 inches maximum (165.10 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	7 to 9 ohms
Power handling rating	14 watts rms; peak - 20 watts rms
Frequency range	150 to 7, 000 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL SERVICE

Temperature range (nonoperating)	-65° to +160°F
Moisture resistance	In accordance with MIL-L-10911
Vibration	In accordance with MIL-L-10911
Endurance	In accordance with MIL-L-10911

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-448/U
81349	LS-448/U
04848	LS-448/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-450/B
(APPLICABLE SPECIFICATION: MIL-L-24296(SHIPS))

No illustration available

FUNCTIONAL DESCRIPTION:

The LS-450/B is a permanent magnet dynamic loudspeaker for speech communication between the interior of a submarine and the bridge or escape hatch. It may also be used as a microphone in two-way conversation. The unit will operate under pressure conditions from atmospheric pressure to high pressure present at submarine operating depths. The unit is protected against normal sea exposure and freezing spray conditions by encapsulating the moving voice coil assembly in silicone rubber.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet, LS-450/B

RELATIONSHIP TO SIMILAR EQUIPMENT:

Electrically and dimensionally interchangeable with the IC/SHA-IR Loudspeaker (Per BuShips Dwg. 900-S 6502-73987 Rev. O). The output sound pressure level of the LS-450/B is about 8 dB lower than the IC-SHA-IR output level with the same input power.

PHYSICAL DESCRIPTION:

Diameter	6 inches (152.40 mm)
Mounting Dimensions	Four mounting holes 9/16 inch (14.29 mm) in diameter on 2-3/8 inch by 3-7/8 inch (60.33 by 98.43 mm) mounting centers
Terminal/Connector Designation	Two No. 8-32 binder head machine screws on terminal board.

Over-all Dimensions:

Diameter	6 inches (152.40 mm)
Depth	5 inches (127.00 mm)
Weight	14 pounds

ADDITIONAL PHYSICAL DATA:

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 ohms
Power handling rating	5 watts (25 watts, max) (warble tones)
Frequency range	600 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:

Output as a Microphone	.01 volts with 16 ohms load and 100 dB sound pressure level 775-1225 Hz.

Environmental Data:

Pressure Proof
Freeze Proof
Submersible


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-450/B
32001	LS-450/B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-454/U
(APPLICABLE SPECIFICATION: MIL-L-12632)

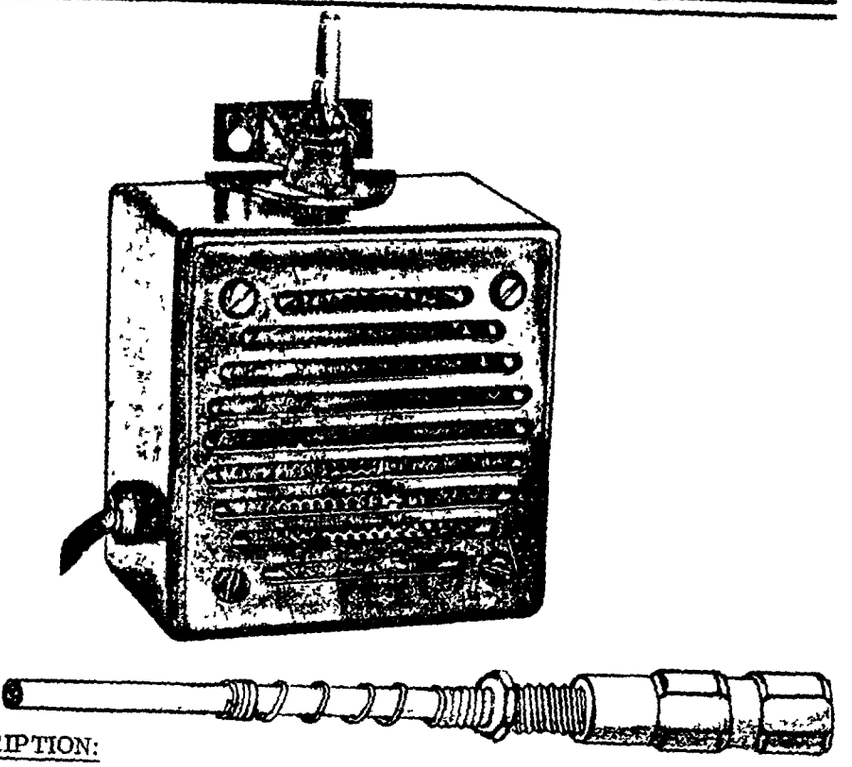

FUNCTIONAL DESCRIPTION:

This unit is a 4-inch, direct radiator, dynamic type loudspeaker. It is housed in a metal inclosure and is resistant to weather, gunblast, immersion, humidity, temperature extremes, and bounce. The unit is intended for use with ground service tactical equipments where resistance to gunfire and immersion are requirements.

CONSISTS OF:

1 Loudspeaker Unit - Type LS-445/U.
1 Cabinet - Metal with Adjustable Clamp.
1 Cord - Type COS-2(23).
1 Plug - Type U229/U.
1 Transformer - In Case.

RELATIONSHIP TO SIMILAR EQUIPMENT:

This speaker is similar to the LS-590/U and the LS-166/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Cone diameter	4 inches (101.60 mm)
Mounting dimensions	Adjustable mounting bracket with two 9/32-inch (7.14 mm) diameter holes spaced 1-1/2 inch (38.10 mm) center to center

Overall dimensions:

Length	7.031 inches (178.59 mm)
Width	5.656 inches (143.66 mm)
Depth	3.312 inches (84.12 mm)

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	8 ohms
Power handling rating	2 watts (warble tones)
Frequency range	300 to 7,000 Hz

ADDITIONAL TECHANICAL DATA:

Transformer data	600 ohms primary impedance reflected at input Terminals of connector

Environmental data

Operating conditions:

Temperature	From -65° to +160°F
Elevation	5,000 feet above sea level
Relative humidity	95 percent

Nonoperating conditions:


Temperature	From -80° to +160°F for 72 hours
Elevation	50,000 feet above sea level
Relative humidity	100 percent
Blast, immersion, bounce	In accordance with MIL-L-12632

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-454/U
80063	LS-454/U
87771	LS-454/U
04848	LS-454/U
32001	LS-454/U
74201	LS-454/U
84792	LS-454/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-455/U
(APPLICABLE DRAWING· NAVY RE49C724)

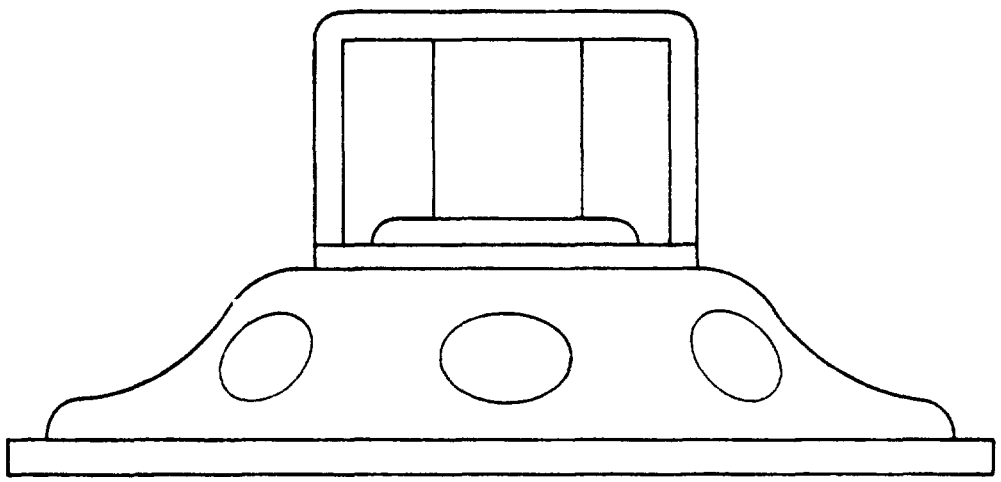

FUNCTIONAL DESCRIPTION:

Loudspeaker LS-455/U is an unencased, 2-watt, permanent magnet type loudspeaker unit It has a 4-inch diameter cone with a voice coil impedance of 3 2 ohms. It is suitable for use in announcing - equipment, shipboard

CONSISTS OF·

1	Permanent Magnet Loudspeaker	LS-455/U

RELATIONSHIP TO SIMILAR EQUIPMENT

This speaker, with appropriate transformer, is interchangeable with NT-49817

PHYSICAL DESCRIPTION:

Diameter - 4 inches (101.60 mm)

Mounting Dimensions:

Four .187 dia. holes on 3.312 inch mounting centers and four 250 dia holes on .687 x 4.562 inch mounting centers.

Over-all Dimensions.

Length -	4.062 inches (103 17 mm)
Width -	4.062 inches (103 17 mm)
Depth -	1.875 inches (maximum) (47 63 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION.

INPUT

Voice coil impedance	3.2 ohms
Power handling rating	5 watts, peak
Frequency range	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA

Environmental Service


Moisture	Resistant
Shock	Resistant
Vibration	Resistant

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80063	LS-455/U
87771	C4BN06001
84792	LS-455/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-474/U
(APPLICABLE SPECIFICATION· MIL-L-17061)

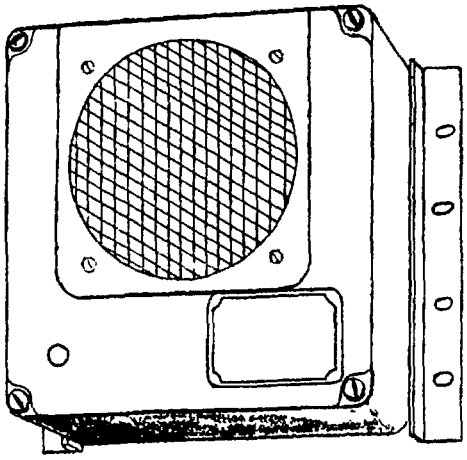

FUNCTIONAL DESCRIPTION:

The LS-474/U Loudspeaker is designed as a general purpose unit having provision for mounting on a wall, rack panel, or table top.

CONSISTS OF:

1 Loudspeaker LS-474/U

Including.
1 Cabinet, Including Mounting Brackets
1 Matching Transformer

RELATIONSHIP TO SIMILAR EQUIPMENT.

Similar to LS-195/U except for the single primary impedance transformer and elimination of attenuator.

ACCESSORIES:

A volume control, can be mounted on the front panel by removing the hole plug

Two loudspeakers may be mounted on relay rack CY-597A/G.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Weight - - - - - - - - - - - - - - - - - - Not available

Dimensions.

Length - - - - - - - - - - - - - - - - -	8.562 inches (217.47 mm)
Width - - - - - - - - - - - - - - - - - -	8.688 inches (220.68 mm)
Depth - - - - - - - - - - - - - - - - - -	5 inches (127.0 mm)
Nominal Cone Diameter - - - - - - -	6 inches (152.4 mm)

Mounting Dimensions:

4-7/32 inch diameter mounting holes spaced 4.33 inches center to center.

4 mounting holes on flanges provide for installation on a bulkhead.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - -	3.2 ohms
Power handling rating - - - - - - - -	4 watts, nominal
Frequency range - - - - - - - - - - -	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA:


Transformer Primary Impedance - - - 600 ohms

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
81349	LS-474/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, LS-590( )/U
(APPLICABLE SPECIFICATION· MIL-L-12632)

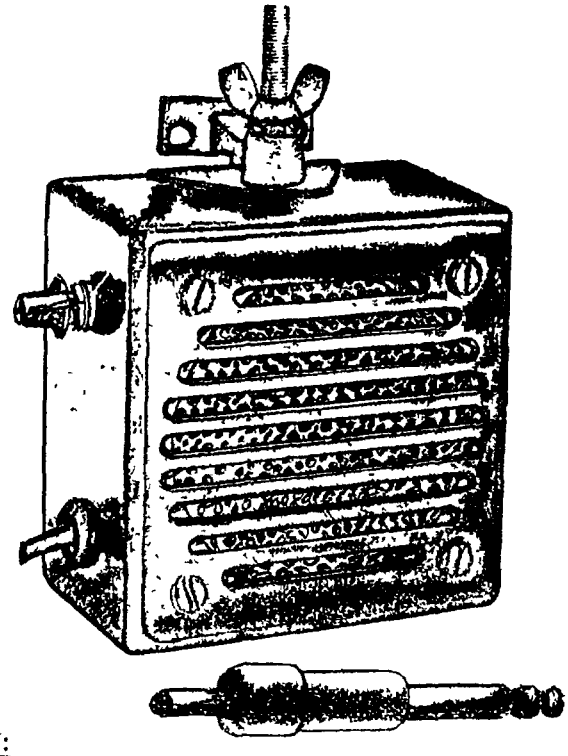

FUNCTIONAL DESCRIPTION:

This unit is a 4-inch, direct radiator, dynamic type loudspeaker. It is housed in a metal inclosure and is resistant to weather, gunblast, immersion, humidity, temperature extremes, and bounce. The unit is intended for use with ground service tactical equipments where resistance to gunfire and immersion are requirements. The loudspeaker is equipped with a switch. The switch is a two-position switch. One position connects to a 4, 000 ohm impedance, and the other position connects to a 250 ohm position.

CONSISTS OF:

1 - Loudspeaker Unit - Type LS445/U
1 - Cabinet - Metal with Adjustable Clamp
1 - Cord - Type COS-2(18)
1 - Plug - Type - 055B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

RELATIONSHIP TO SIMILAR EQUIPMENT:

Type LS-590( )/U is a replacement for loudspeaker LS-11-A and LS-203/U. The LS-590( )/U is similar to the LS-166/U and the LS-454/U.

PHYSICAL DESCRIPTION·

Diameter	4 inches (101.60 mm)
Mounting dimensions	Adjustable mounting bracket with two 9/32-inch (7.14 mm) diameter holes spaced 1-1/2 inch center to center.
Plug	PJ-055B

Overall dimensions:

Length	7.031 inches (178.59 mm)
Width	4.906 inches (124.61 mm)
Depth	3.312 inches (84.12 mm)

TECHNICAL DESCRIPTION

INPUT

Voice coil impedance	8 ohms
Power handling rating	2 watts (warble tones)
Frequency range	300 to 7,000 Hz

ADDITIONAL TECHNICAL DATA·

Transformer data	Multi-stage - 4,000 ohms primary impedance and 250 ohms primary impedance
Resistant characteristics	Resistant to gun-blast, immersion, humidity, temperature extremes, and bounce

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Environmental data:

Operating conditions:

Temperature	From -65° to +160°F
Elevation	5, 000 feet above sea level
Relative humidity	95 percent
Salt-laden air	As encountered in coastal regions

Nonoperating conditions:


Temperature	From -80° to +160°F for 72 hours
Elevation	50, 000 feet above sea level
Relative humidity	100 percent

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	LS-590( )/U
80063	LS-590( )/U
87771	LS-590( )/U
04848	LS-590( )/U
84792	LS-590( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, PERMANENT MAGNET, NT-491814
(APPLICABLE DRAWING NAVY RE49C764)

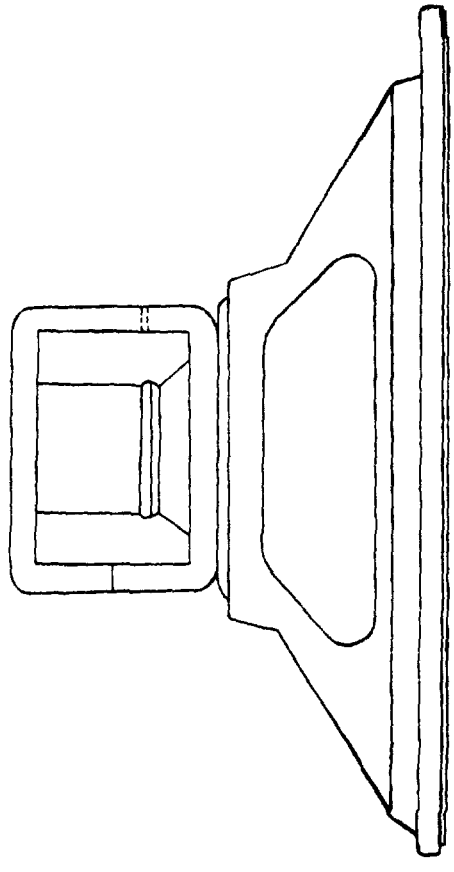

FUNCTIONAL DESCRIPTION

The NT-491814 is a six-inch low impedance loudspeaker resistant to shock, vibration, and salt spray, which is suitable for shipboard and general purpose use.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet NT-491814

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Nominal Diameter	6 inches (152.4 mm)
Diameter	6-1/8 inches (155.58 mm)
Depth	3-1/8 inches (79.38 mm)
Weight	Not available

ADDITIONAL PHYSICAL DATA:

Mounting Dimensions:

Four slots .203 x .297 inches at the corners of a 4-1/4 inch square.

Finish:

All corrosive metal parts finished in gray enamel.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	3.2 ohms at 400 Hz
Power handling rating	4 watts
Frequency range	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA.


REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
70215	B7240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 102

LOUDSPEAKER, HORN, LS-103( )/TIQ-2
(APPLICABLE SPECIFICATION MIL-L-13941)

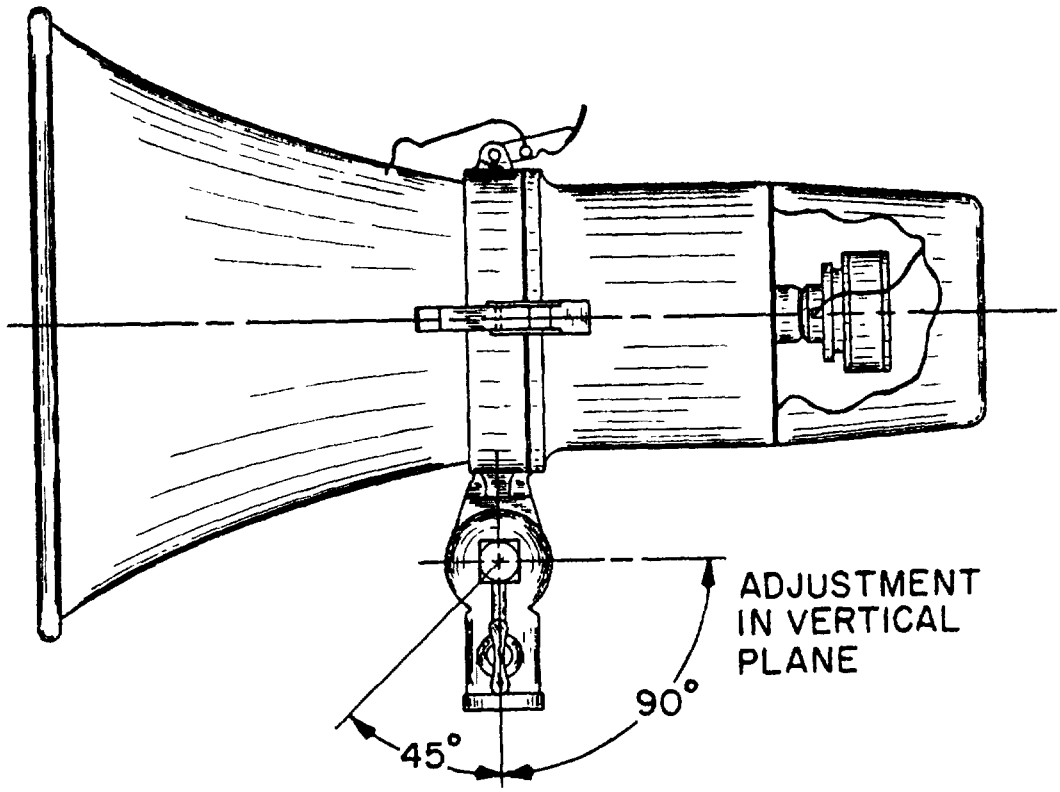

FUNCTIONAL DESCRIPTION.

The LS-103 is a permanent magnet dynamic, reentrant horn type loudspeaker. The unit is rugged in construction and will operate over a wide temperature range and under harsh environmental conditions. The LS-103 is primarily intended for use as part of Public Address Set AN/TIQ-2.

CONSISTS OF:

1 Loudspeaker, Permanent Magnet LS-103/TIQ-2.

RELATIONSHIP TO SIMILAR EQUIPMENT.

Used with Public Address Set AN/TIQ-2. This loudspeaker is similar to the LS-104( )/TIQ-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DIMENSIONS:

Diameter	19.06 inches (484.12 mm)
Mounting Dimensions	Adjustable mounting bracket with .84 inch mounting hole
Terminal/Connector Designation	5 binding posts

Over-all Dimensions:

Diameter	19.06 inches (484.12 mm)
Length	26 inches (660.50 mm)
Weight	14 pounds

ADDITIONAL PHYSICAL DATA:

Horn thread size	1-3/8-18
Loudspeaker color	Green
Horn material	Steel, Aluminum, or Bronze Alloys
Vertical adjustment	Provides for adjustment in the vertical plane
Fasteners	4 fasteners for attaching horn and driver cover

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance	16 Ohms
Power handling rating	20 watts normal; 25 watts peak (warble tones)
Frequency range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Nonoperating Conditions:

Temperature	From -80° (24 hours max.) to +160°F (4 hours max.)
Relative Humidity	97% indefinitely, 100% for 4 hours
Elevation	25,000 feet above sea level

Operating Conditions:

Temperature	From -65° (72 hours max.) to +150°F (4 hours max.)
Relative Humidity	97%, 100% for 4 hours
Elevation	100,000 feet above sea level

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Driver Unit Data:


Power Handling Capacity - - - - -	25 watts at 175 Hz
Weight - - - - - - - - - - - - - - -	4 pounds maximum
Magnet Material - - - - - - - - - -	Alnico Number 5 or equal
Transformer Data: - - - - - - - - - -	Primary impedances 250, 500, 1,000, and 2,500 ohms
Resistant Characteristics. - - - - - -	Resistant to vibration, gun blast, moisture and shock

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058 87771	LS-103( )/TIQ-2 LS-103( )/TIQ-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, HORN, LS-211/AIC-13
(APPLICABLE SPECIFICATION: MIL-L-25547)

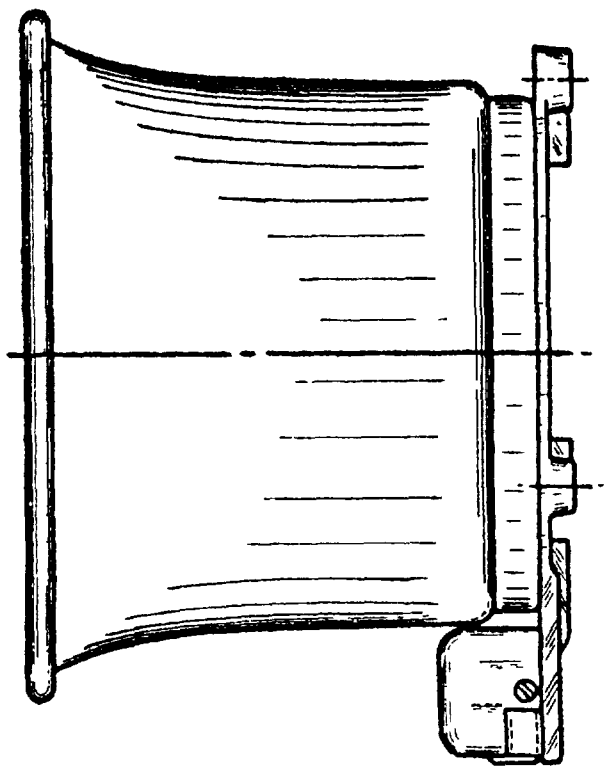

FUNCTIONAL DESCRIPTION:

The LS-211/AIC-13 is a permanent magnet loudspeaker. It is intended to be used as part of Public Address Set AN/AIC-13 to transmit audio messages at low altitudes or at ground level within a military aircraft or from a military aircraft on the ground to personnel in the immediate vicinity. This unit is used where high power is reduced to override high noise levels.

CONSISTS OF:

1 Permanent Magnet Reflex Re-entrant Horn Type Loudspeaker LS-211/AIC-13

RELATIONSHIP TO SIMILAR EQUIPMENT:

Part of Public Address Set AN/AIC-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION

Over-all dimensions:

Length	7.53 inches (191.26 mm)
Width	6.80 inches (172.72 mm)
Depth	4.97 inches (126.24 mm)
Net weight	3.12 pounds

TECHNICAL DESCRIPTION

INPUT

Voice coil impedance	16 ohms nominal
Power handling rating	20 watts, rms

OUTPUT

Frequency range	500 to 8,000 Hz
Sensitivity	115 dB at full rated power and at a distance of 4 feet on axis

ADDITIONAL TECHNICAL DATA:

Environmental Data:

Operating Conditions:

Temperature	From -67° to +160°F
Pressure	To 50,000 feet

Other Data:


Explosive Decompression.	10 consecutive explosive decompressions from an altitude of 8000 feet to an altitude of 35,000 feet (corresponding to pressures of 22.2 to 7.04 inches of mercury).
Environmentally Resistant	Humidity, shock, vibration, fungus, salt spray

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
81349	LS-211/AIC-13
87771	LS-211/AIC-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

LOUDSPEAKER, HORN LS-387/LS-388/(SIC)
(APPLICABLE SPECIFICATION: MIL-A-20222)

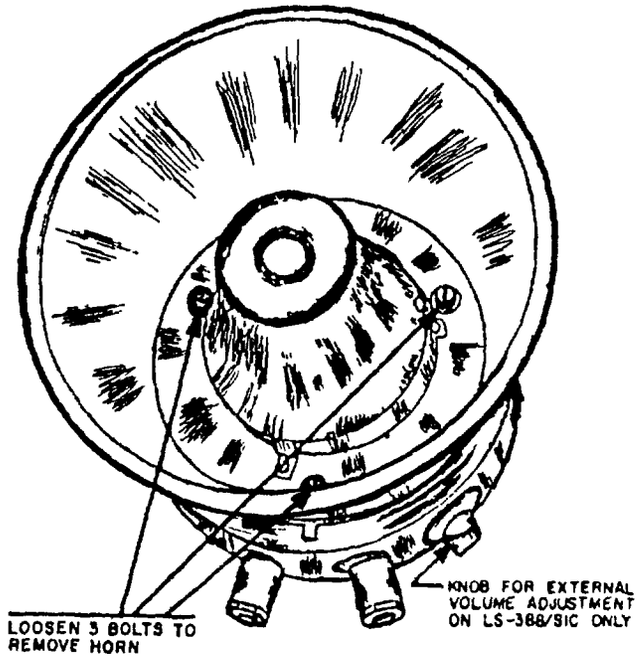

FUNCTIONAL DESCRIPTION.

The LS-387/SIC and LS-388/SIC are high power loudspeakers intended for use on shipboard. They provide good speech intelligibility and good reproduction of alarm signals in areas with high noise levels.

CONSISTS OF

1 Loudspeaker LS-387/SIC or LS-388/SIC

Including:

1 Transformer FSN N5950-548-4829

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

RELATIONSHIP TO SIMILAR EQUIPMENT

The LS-387/SIC is identical to the LS-388/SIC except for the method of volume adjustment. On the LS-387/SIC volume is adjusted internally by connecting a movable jumper to any one of five terminals inside the speaker case. The LS-388/SIC volume is adjusted by a five-position tap switch which is accessible on the outside of the case.

PHYSICAL DESCRIPTION

Nominal diameter - - - - - - - - - - - - - - - - - - - 12 inches (304 8 mm)


Mounting dimensions

Refer to the following figure, Mounting dimensions, for arrangement of mounting holes

Over-all dimensions

Length - 10 inches (254 0 mm)
Diameter - 12.625 inches (320 68 mm)
Weight - 23 pounds

MOUNTING DIMENSIONS

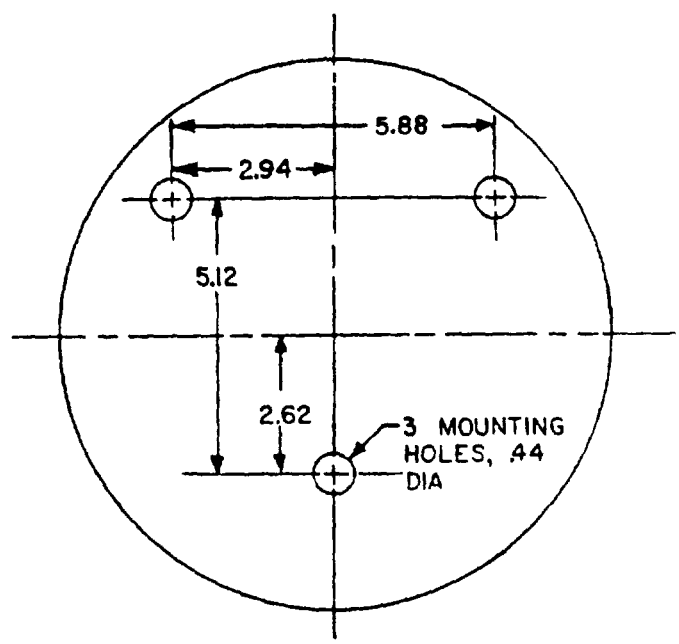

ADDITIONAL PHYSICAL DATA

Material: Horn assembly and case are brass.
Finish Light Gray, Semi-Gloss.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Voice coil impedance - - - - - - - - - - - 13.5 ohms
Power handling rating- - - - - - - - - - - 7.5 watts, peak
Frequency range- - - - - - - - - - - - - - 400 to 4,000 Hz

ADDITIONAL TECHNICAL DATA:

Transformer data:

The transformer is tapped to allow use with either a 50 or 70 volt audio line.
Primary impedances at 70 volt tap: 670; 3100; 10,200; 18,400; 22,000 ohms.
Primary impedances at 50 volt tap: 350, 1,500; 5,200; 9,600, 11,300 ohms.

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
32001	LS-387/SIC
32001	LS-388/SIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 200

MICROPHONES


Section

201 Microphone

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 201

MICROPHONE, M-65
(APPLICABLE SPECIFICATION MIL-M-11101)

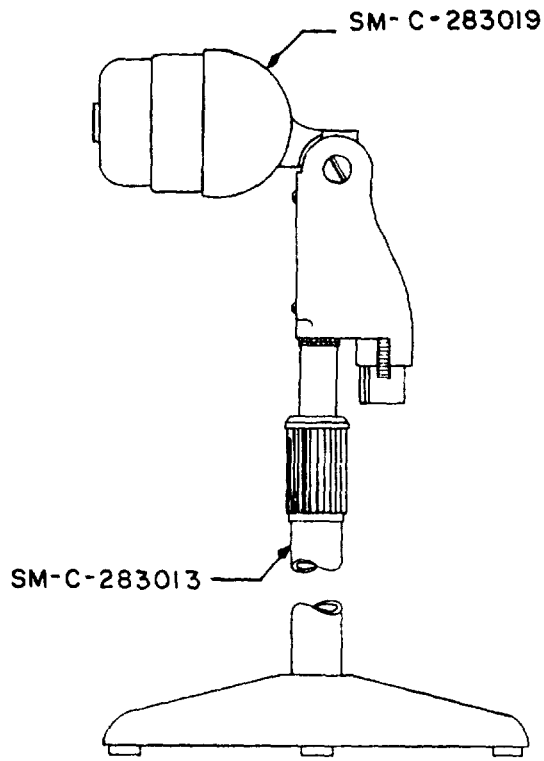

FUNCTIONAL DESCRIPTION:

This microphone is a dynamic omnidirectional desk type with a stand, cable and a cable connector. It is used with a recorder-reproducer.

CONSISTS OF

1 Microphone M-65( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT

Used with and part of AN/TNH-2.

PHYSICAL DESCRIPTION

Dimensions (Over-all):

Length	17.0 inches (431.8 mm)
Diameter (Base)	6.0 inches (152.4 mm)
Height W/Stand	12 inches (304.8 mm) to 17 inches (431.8 mm)

ADDITIONAL PHYSICAL DATA:

Cable Data:

Length (Extended)	120 inches (3,048 mm)
Termination	Integral Cable Type Connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable
Polarizing Voltage	Not rated

OUTPUT

Nominal Impedance	150 ohms
Frequency Range	100 to 10, 000 Hz

ADDITIONAL TECHNICAL DATA:

Consists of


1	Microphone	M-44( )/U
1	Stand, Microphone	MT-1583( )
1	Cable Assembly	CX-3322( )/J

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058 82680	M-65( )/U TM-226

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

MICROPHONE, M-80C/U
(APPLICABLE SPECIFICATION MIL-E-55119)

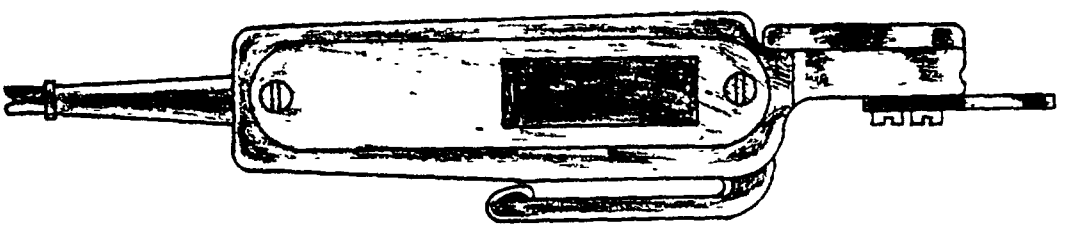

FUNCTIONAL DESCRIPTION:

Palm held, dynamic, and noise canceling microphone that is equipped with a four conductor retractile cord terminated with a connector U-1902( )/U and a clip for attaching the microphone to the user's clothing or a radio set.

CONSISTS OF:

1 Microphone, Dynamic M-80 C/U
Including:
1 Handle
1 Five-conductor retractible cord
1 Retractile cord with integral connector

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to M-80( )/GR microphone.

PHYSICAL DESCRIPTION:

Weight - Not rated

Dimensions:
Length - 2 inches (50.8 mm)
Width - 1.4 inches (35.56 mm)
Height - 6.1 inches (152.65 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Cable Data:

Length (Retracted)	11.5 inches (292.10 mm)
Length (Extended)	6 feet (1,828.8 mm)
No. of Conductors	5
No. of Connectors	1
Connector Plug	U-182( )/U

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not rated

OUTPUT

Nominal Impedance	150 ohms at 1,000 Hz
Frequency Range	300 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:


Moisture Resistance	Water tight (3 feet water for 2 hrs)
Relative Humidity (Nonoperating)	97 to 100 percent
Elevation (Operating)	Up to 15,000 feet above sea level
Elevation (Nonoperating)	Up to 50,000 feet above sea level
Salt spray	20 percent salt solution at 96°F for 48 hrs.
Vibration	Resistant
Blast	Resistant
Switch Data	Push-to-talk type

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058 81134	M-80 C/U 980

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

MICROPHONE, M-87/AIC
(APPLICABLE SPECIFICATION MIL-M-26542)

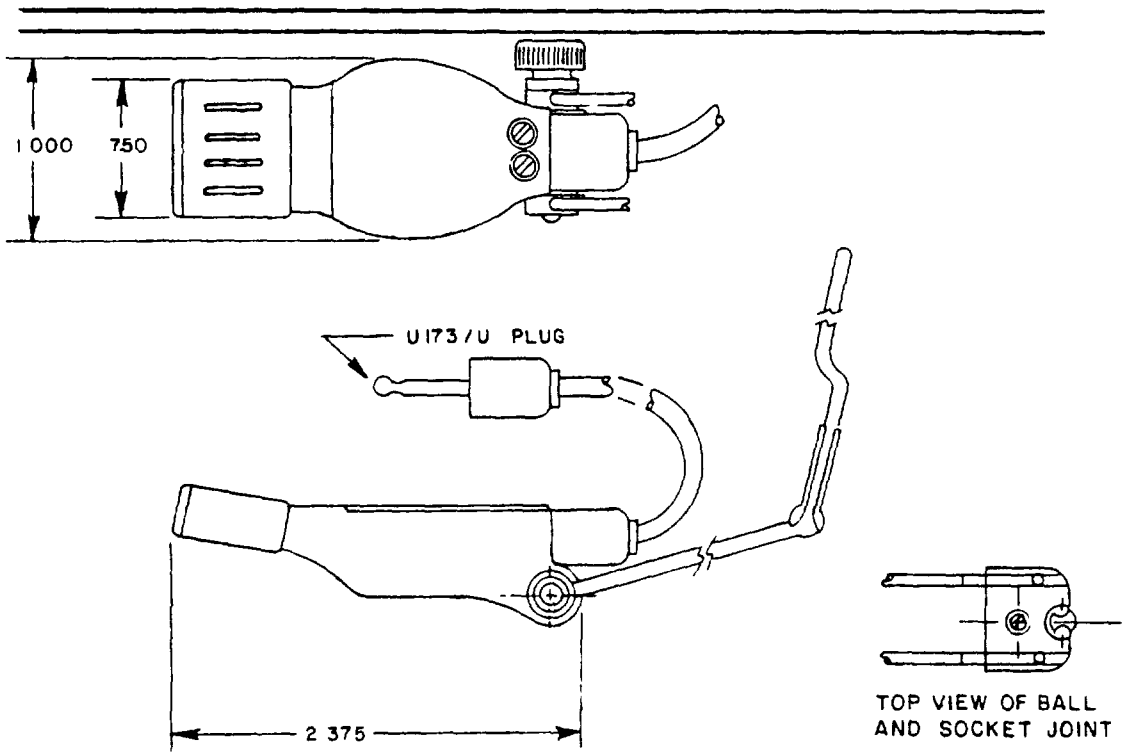

FUNCTIONAL DESCRIPTION

Microphone, dynamic M-87/AIC is a noise-canceling dynamic moving coil microphone designed for use on a headband type headset at low altitudes or for use in a pressure type oxygen helmet, at altitudes where the use of an oxygen helmet is required. The microphone is intended for use as a part of intercommunication set AN/AIC-10( ) to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF

1 Microphone, Dynamic M-87/AIC
Including
1 Cable Assembly
1 Boom Assembly

RELATIONSHIP TO SIMILAR EQUIPMENT

PHYSICAL DESCRIPTION

Weight	45 grams maximum.
Color	Black

Dimensions:

Length	8.67 inches (220.22 mm)
Width (max point)	.72 inches (18.29 mm)
Height (overall)	1.0 inches (25.4 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Cable Data:

Length	5.25 inches (133.35 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	U-173/U

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Metal or Mylar.

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not applicable

OUTPUT

Nominal Impedance	5.0 ohms ±2.0 ohms at 1,000 Hz
Frequency Range	200 to 6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:


Temperature	-55° to 85°C
Explosive Decompression	Pressure reduction from 22 in Hg (8000 ft) to 7 in Hg (35,000 ft.) in 0.1 second
Moisture Barrier Seal	.25 lb_f/in^2
Stray Magnetic Field	Maximum of 5° compass deflection at 12 inches
Humidity	Resistant
Vibration	Resistant
Shock	Resistant
Salt Spray	Resistant

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058 04848	M-87/AIC 7612-A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

MICROPHONE, M-101/AIC
(APPLICABLE SPECIFICATION: MIL-M-26542)

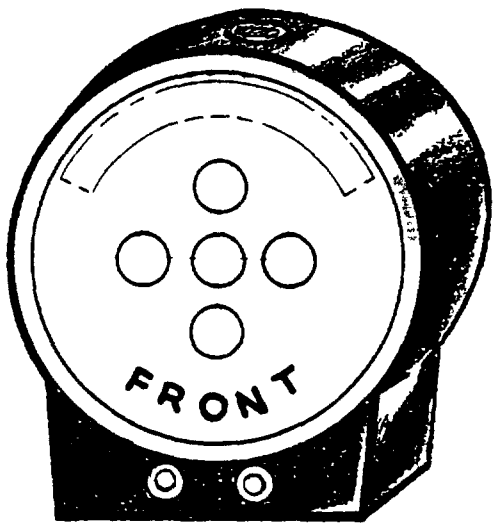

FUNCTIONAL DESCRIPTION

Microphone element M-101/AIC is a noise-canceling dynamic moving coil microphone element designed for use on a headband type headset at low altitudes or for use in an oxygen mask or pressure-type oxygen helmet, at altitudes where the use of an oxygen helmet is required The microphone element is intended for use with intercommunication sets AN/AIC-10 and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF:

1 Microphone Element M-101/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT:

Microphone element M-101/AIC is used with microphone M-100/AIC.

PHYSICAL DESCRIPTION:

Weight - 16 grams maximum

Dimensions:

Length - - - - - - - - - - - - - - - - - 1.163 inches (29.54 mm) (exclusive of cable).
Width (max. point) - - - - - - - - - - - .5 inches (12.70 mm)
Height (overall)- - - - - - - - - - - - 1.047 inches (26.44 mm)

Cable Data - - - - - - - - - - - - - - - Not applicable.
No. of Conductors - - - - - - - - - - - 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL PHYSICAL DATA:

Diaphragm Material - - - - - - - - - - Polyethylene terephthalate (Mylar polyester)

TECHNICAL DESCRIPTION:

INPUT

Operating Current - - - - - - - - - - - Not applicable.

OUTPUT

Nominal Impedance - - - - - - - - - - 7 ±2 ohms at 1,000 Hz.
Frequency Range- - - - - - - - - - - - 200 to 6, 000 Hz.

ADDITIONAL TECHNICAL DATA:

Environmental Characteristics:

Ambient Operating Conditions:

Temperature - - - - - - - - - - - - - - -55° to 70°C
Humidity - - - - - - - - - - - - - - - - 100 percent
Explosive Decompression - - - - - - - Pressure reduction from 22 in Hg (8000 ft.) to 7 in Hg (35, 000 ft.) in 0. 1 second
Vibration - - - - - - - - - - - - - - - - Resistant
Shock - - - - - - - - - - - - - - - - - - Resistant
Salt Spray - - - - - - - - - - - - - - - Resistant

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80058 81134 04848	M-101/AIC 82368 6604-B1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

MICROPHONE, M-125/SIC
(APPLICABLE SPECIFICATION: MIL-M-23813(SHIPS))

NO ILLUSTRATION AVAILABLE

FUNCTIONAL DESCRIPTION:

Hand held magnetic microphone that is equipped with a 120" 6 conductor coiled cord and a six pin connector The microphone is of the noise canceling type and used in intercommunication and announcing systems aboard Naval ships.

CONSISTS OF

1 Microphone, M-125/SIC

Including

1 120" 6 conductor coiled cord with 6 pin connector.

RELATIONSHIP TO SIMILAR EQUIPMENT

Used in conjunction with LS-305/306 and LS-387/388(SIC) loudspeakers in intercommunication and announcing systems aboard Naval ships.

PHYSICAL DESCRIPTION

Weight - Not rated

Dimensions

Length - - - - - - - - - - - - - - - - - - - Not rated
Width - Not rated
Height - Not rated

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Cable Data:

Length (Retracted)	Not rated
Lenght (Extended)	120 inches
No. of Conductors	6
No. of Connectors	1
Connector Plug	In accordance with MIL-M-23813

TECHNICAL DESCRIPTION:

INPUT

Operating Current	Not rated

OUTPUT

Nominal Impedance	Not rated
Frequency Range	200-6,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Data:


Shock	In accordance with MIL-M-23813
Random Drop	In accordance with MIL-M-23813
Salt Spray	In accordance with MIL-M-23813
Vibration	In accordance with MIL-M-23813
Blast	In accordance with MIL-M-23813
Switch Data	Push-to-talk type

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
81349	M-125/SIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

MICROPHONE, M-162( )/AIC
(APPLICABLE SPECIFICATION MIL-M-49199(CR))

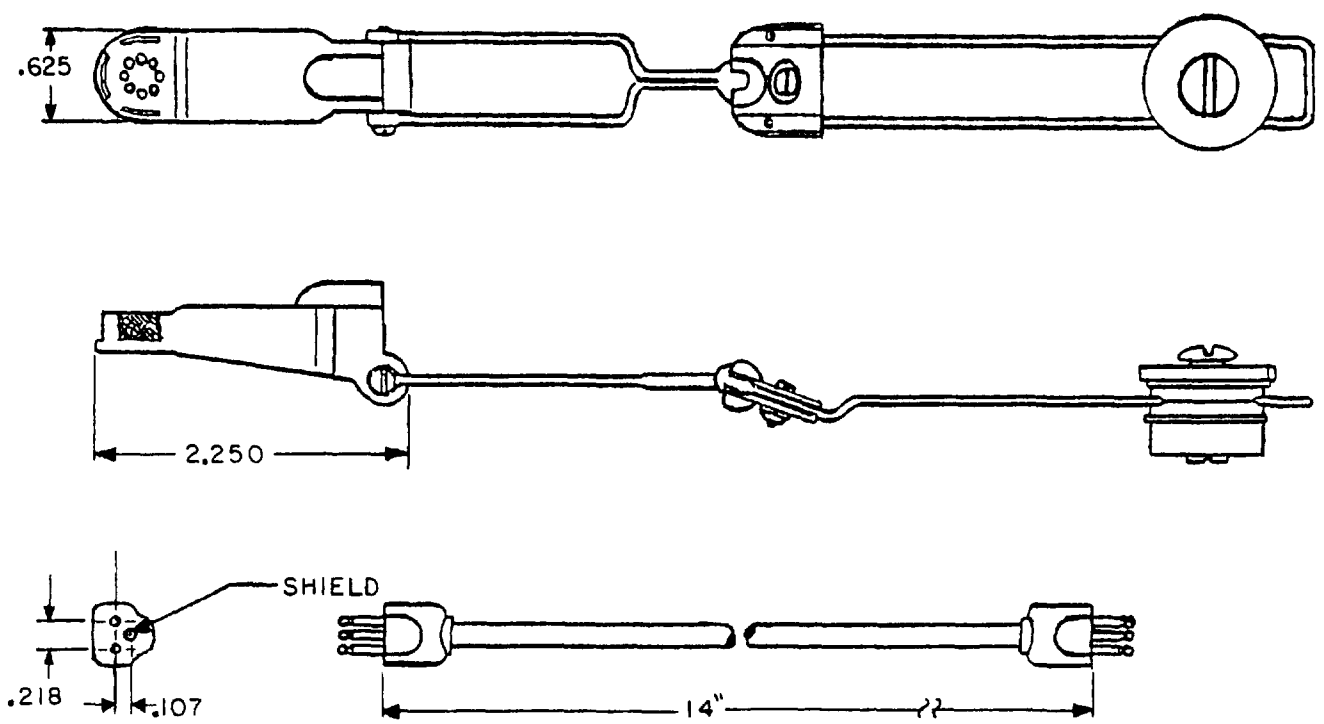

FUNCTIONAL DESCRIPTION

Microphone, Linear, M-162/AIC is a noise-canceling dc powered, high gain microphone designed for use on a headband type headset at low altitudes or for use in a pressure type oxygen helmet, at altitudes where the use of an oxygen helmet is required. The microphone is intended for use as a part of the airborne communication system which will provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

CONSISTS OF:

1 Microphone, Linear M-162( )/AIC
  Including:
1 Cable Assembly
1 Boom Assembly

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Weight	45 grams maximum
Color	Black

DIMENSIONS:

Length	2.250 inches nominal
Width (Max Point)	0.625 inches nominal

CABLE DATA:

Length	14 inches
No. of Conductors	3 (Microphone Hi, Microphone Low, Shield)
No. of Connectors	2
Connector Designation	Electro-Voice Part #17273

ADDITIONAL PHYSICAL DATA:

Diaphragm Material	Electret Condensor, Piezo-Electric Ceramic or Polyvinylidene Floride

TECHNICAL DESCRIPTION:

INPUT

Power Requirement	10 Vdc at 8 mA

OUTPUT

Nominal Impedance	150 ohms ±20 percent at any frequency over the range of 400 to 6,000 Hz
Frequency Range	400 to 6,000 Hz ±3 dB

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL TECHNICAL DATA

ENVIRONMENTAL CHARACTERISTICS

Ambient Operating Conditions

Temperature	-55° to 85°C
Moisture Barrier Seal	.25 lb_f/in^2
Stray Magnetic Field	Maximum of 5° compass deflection at 12 inches
Humidity	Resistant
Vibration	Resistant
Shock	Resistant
Salt Spray	Resistant
Immersion	Resistant

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
81134	M-162( )/AIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 300

HANDSETS


Section

301 Handsets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 301

HANDSET, H-60( )/PT
(APPLICABLE SPECIFICATION. MIL-H-11996)

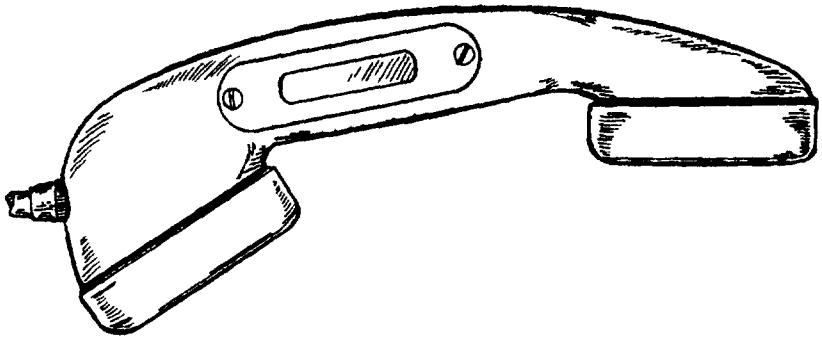

FUNCTIONAL DESCRIPTION

Handset H-60( )/PT is intended for use with wire communication equipment. The unit is waterproof and withstands severe environmental conditions. This handset is therefore suitable for outdoor use. It is used as part of Intercom Station AN/VIA-4, AN/MTC-3( ).

CONSISTS OF:

1 Handset H-60( )/PT
Including:
1 Transmitter Element - TA-117( )/PT
1 Receiver Element Telephone TA-235( )/PT
1 Switch Assembly SA-129/PT
1 Handle
1 Electrical Cord Assembly - CX2151( )/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Handsets H-60( )/PT, H-156( )/U, and H-165( )/U have the same electrical and mechanical construction except the cord assemblies are different.

PHYSICAL DESCRIPTION:

Dimensions (Over-all):

Length	8.44 inches (214.38 mm)
Depth	2.80 inches (71.12 mm)
Receiver Diameter	2.56 inches (65.02 mm)
Transmitter Diameter	2.59 inches (65.79 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Cord Data:

Length (Retracted)	9 inches (228.6 mm)
Length (Extended)	36 inches (914.4 mm approximately)
No. of Conductors	7
Connector Designation	Pin type
Weight	Not Rated

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current	125 mA (maximum)

OUTPUT

Nominal Resistance	35 ohms
Frequency Range	500 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	150 ohms
Frequency Range	500 to 3,200 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Elevation	Up to 10,000 feet

Equipment Nonoperating:


Relative Humidity	Up to 98%.
Elevation	10,000 to 50,000 feet above sea level
Immersion	3 feet of water for 2 hours
Blast	Resistant

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	H-60( )/PT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HANDSET H-169/U
(APPLICABLE DRAWING· RE-51-128E)

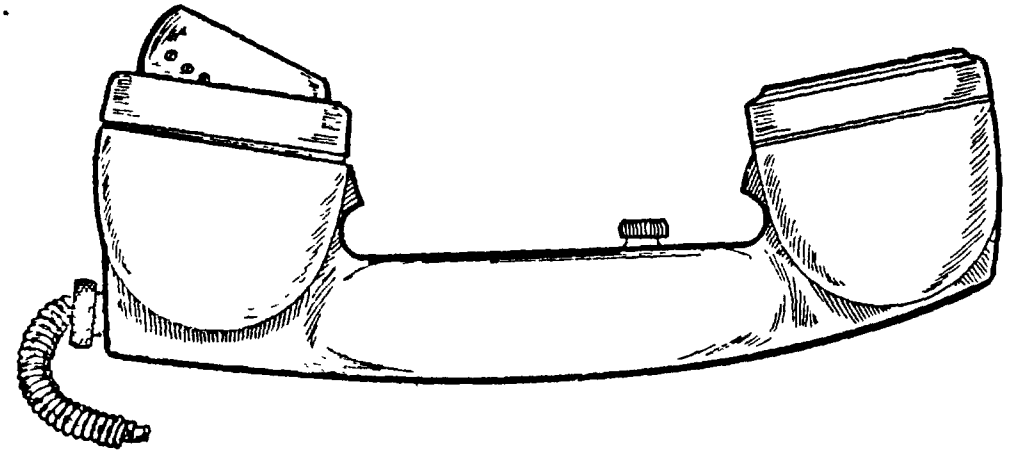

FUNCTIONAL DESCRIPTION

This unit is a noise canceling type handset containing a magnetic earphone element and a microphone with a transistorized amplifier. The handset is suitable for general use in telephone circuits.

The handset is battery powered

CONSISTS OF

1 Microphone Amplifier N5965-624-4134
1 Mouthpiece
1 Receiver Element N5965-678-5305
1 Receiver Cap N5965-683-2075
1 Handset Handle (MIL-M-19833, GDI 30 or MIL-M-22544, Type 4).
1 Cord Protector Assembly
1 Cord Assembly CX-1846( )/U
1 Switch Soft Action 3 Pole Shorting

RELATIONSHIP TO SIMILAR EQUIPMENT

Similar to NT-51007A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Dimensions (Overall):

Length	9.05 inches (229.87 mm)
Width (Transmitter End)	2.72 inches (69 09 mm)
Depth (Transmitter End)	4.06 inches (103.12 mm)

TECHNICAL DESCRIPTION. (MICROPHONE)

INPUT

Operating Current	Not rated

OUTPUT

Nominal Impedance	Not rated
Frequency Range	300 to 5,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	600 ohms
Frequency Range	200 to 5,000 Hz

ADDITIONAL TECHNICAL DATA.


Microphone Amplifier Type	Dynamic Noise Canceling
Receiver Element Type	Magnetic
Switch Type	Push-to-talk

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80058	H-169/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HANDSET, SOUND POWERED, H-203/U
(APPLICABLE SPECIFICATION: MIL-T-15514)

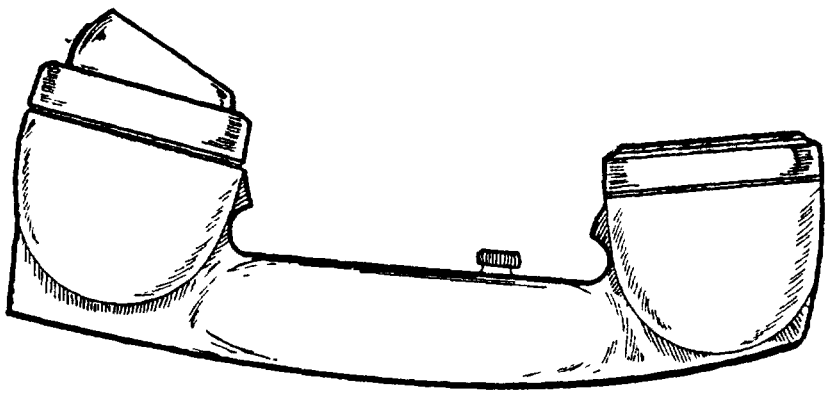

FUNCTIONAL DESCRIPTION

The H-203/U is a sound powered receiver-transmitter employing magnet earphone and microphone elements. This handset is suitable for general use in telephone circuits

CONSISTS OF.

1	Microphone Element	U S. Instrument Corp. Part No UA1614-1
1	Receiver Element	U S. Instrument Corp. Part No UA1614-1
1	Handset Handle	U.S.I.C. Part No 974-2
1	Cord	U.S I C. Part No. UA2467-2
1	Pushbutton Switch	U.S I C. Part No UA2175-1

RELATIONSHIP TO SIMILAR EQUIPMENT

PHYSICAL DESCRIPTION

Weight - - - - - - - - - - - - - - - - - - Not available

Dimensions

Length - - - - - - - - - - - - - - - - -	9 inches (228.6 mm)
Width- - - - - - - - - - - - - - - - - -	2.31 inches (58.67 mm)
Depth- - - - - - - - - - - - - - - - - -	4.13 inches (104.90 mm)

ADDITIONAL PHYSICAL DATA:

Cord Data.

Length, Retracted- - - - - - - - - - - -	1 foot (304 8 mm)
Length, Extended (Approximate) - - - -	6 feet (1,228.8 mm)
No. of Conductors- - - - - - - - - - - -	2
No. of Connectors- - - - - - - - - - - -	2
Connector Type - - - - - - - - - - - - -	Lug type

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION: (MICROPHONE)

OUTPUT

DC Resistance- - - - - - - - - - - - - - - -	90 ohms
AC Impedance - - - - - - - - - - - - - - - -	1,690 ohms
Frequency Range- - - - - - - - - - - - - - -	500 to 2,500 Hz
Frequency of Maximum Response- - - - - - - -	Approximately 1,700 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT


DC Resistance- - - - - - - - - - - - - - - -	60 ohms
AC Impedance - - - - - - - - - - - - - - - -	1,150 ohms
Frequency Range- - - - - - - - - - - - - - -	500 to 2,500 Hz

REFERENCE DATA and LITERATURE

MANUFACTURER CODE	PART NUMBER
80058	H-203/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HANDSET, H-250/U
(APPLICABLE SPECIFICATION MIL-H-49078(EL)

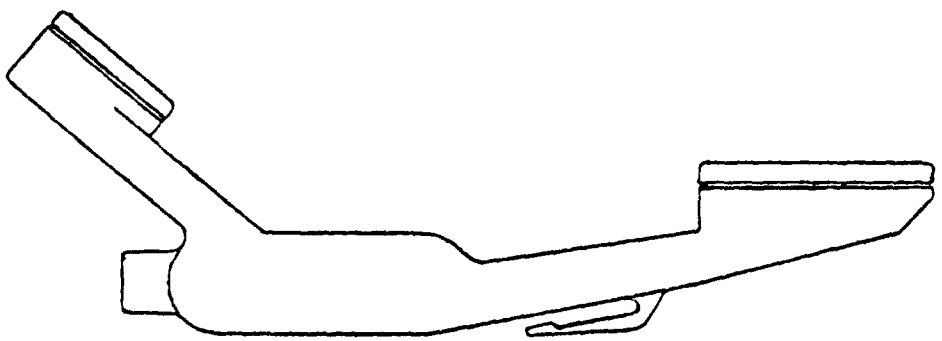

FUNCTIONAL DESCRIPTION:

Handset H-250( )/U is a miniature light-weight handset consisting of a dynamic moving-coil microphone and earphone, a push-to-talk switch, a 6-foot long retractile cord terminated with Connector, Plug U-182B/U and handle. The assembled handset is blast proof and immersion proof. The earphone end of the assembled handset when in use does not interfere with the wearing of Infantryman Helmet M-1. A clip molded integrally with the handle is provided for securing the unit to the carrying harness straps, or to the operator's pocket.

CONSISTS OF:

1 Handset H-250/U
Including:
SEE FUNCTIONAL DESCRIPTION

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions: (Over-all)

Length	7.5 inches (179.07 mm)
Depth	Not rated
Width	Not rated
Weight	235 grams (maximum)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

Cord Data:

SEE FUNCTIONAL DESCRIPTION

TECHNICAL DESCRIPTION: (MICROPHONE)

OUTPUT

Nominal Impedance	150 ohms
Frequency Range	300 to 3, 500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	1, 000 ohms
Frequency Range	20 to 3, 500 Hz

ENVIRONMENTAL LIMITATIONS:

Equipment Operating:

Temperature	-40° to +120°F plus solar radiation.
Elevation	Up to 10, 000 feet above sea level.
Relative Humidity	Up to 95 percent.
Sand and dust	As encountered in the desert.

Equipment Nonoperating:

Temperature	-65° to +155°F
Elevation	Up to 50, 000 feet above sea level.
Relative Humidity	94 ±4% at 86°F.
Immersion	3 feet of water for 2 hours.
Salt fog	5% solution
Drop	Withstands at least 12 drops from 6-foot height onto a concrete floor faced with 1/8" asphalt tile.
Blast	Resistant
Vibration	Resistant
Bounce	Resistant
Fungus	Resistant

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	H-250/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 400

HEADSET

Section

401 Headsets


402 Headsets - Microphone

403 Headsets - Chestset

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 401

HEAD SET, H-139( )/GR
(APPLICABLE SPECIFICATION: MIL-E-55119)

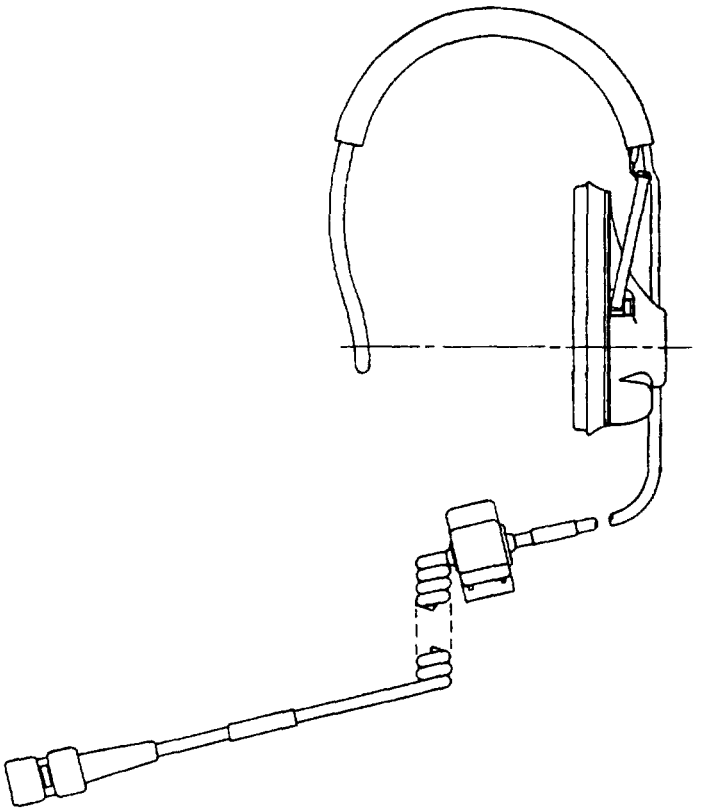

FUNCTIONAL DESCRIPTION.

The headset has a single earphone with a flexible headband and a fold-away earphone intended for use in low and medium ambient noise areas.

CONSISTS OF:

1 Attenuation Plate
1 Impedance Matching Transformer
1 Earphone Receiver, Dynamic
1 Ear cushion
1 Headband
1 Connector - U-182
1 Toggle Switch

RELATIONSHIP TO SIMILAR EQUIPMENT:

The H-139 ( )/GR, H-141 ( )/GR, and H-161 ( )/GR have identical earphone assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.225 inches
Width	3.270 inches
Length	4.225 inches

Cord Data:

Length (contracted)	20 ± 2 inches (508.0 ± 50.8 mm)
Length (extended)	72 ± 2 inches (1829 ± 50.8 mm)
Quantity of Conductors	5
Quantity of Connectors	1
Connector Designation	U-182 ( )/U

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Steel
Type	Double Band, Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	1
Nominal Impedance	1,000 ohms at terminal
Frequency Range	300 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

ENVIRONMENTAL LIMITATIONS:


Elevation (nonoperating)	0 to 50,000 feet
Elevation (operating)	0 to 15,000 feet
Immersion	3 feet water, 2 hours
Salt Spray	20% at 96°F for 48 hours
Blast	Resistant
Vibration	Resistant
Bounce	Package tester
Shock, Drop	6 feet, 12 times concrete floor

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80063	H-139 ( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET, H-154/AIC
(APPLICABLE SPECIFICATION MIL-H-27467)

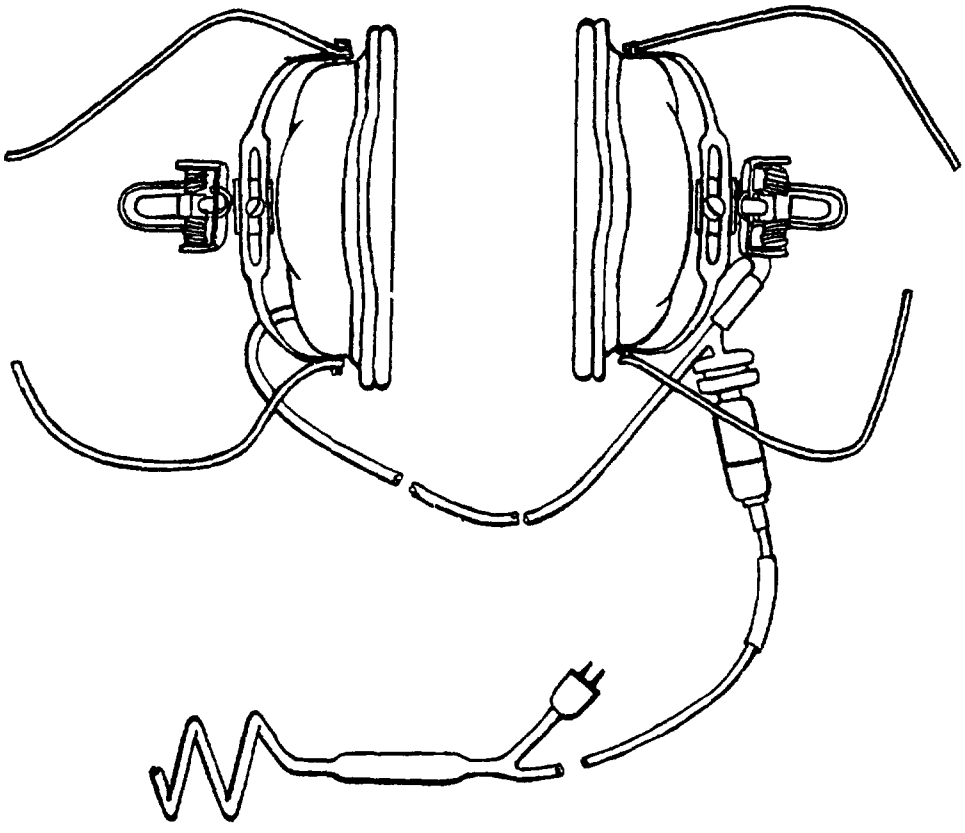

FUNCTIONAL DESCRIPTION

The H-154/AIC is intended for use with Flying Helmet HGU-2A/P. The headset includes a plug connector to plug in a low-impedance dynamic microphone which is mounted in an oxygen mask. The headset is intended for use with Intercommunication Sets AN/AIC-10 and AN/AIC-18 to provide communication of high intelligibility under the extreme noise conditions encountered in military aircraft.

CONSISTS OF

2 Earphones H-143/AIC
2 Earphone Shells MX-3678/AIC and MX-3679/AIC
2 Cord Assemblies CX4707A/AIC and CX4708A/AIC

RELATIONSHIP TO SIMILAR EQUIPMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Earphone Dimensions.

Nominal Diameter	2 inches (50.8 mm)
Depth	0.45 inches (11.43 mm)

Cable Data: (CX-4707A/AIC)

Length	1 foot 7 inches (482.6 mm)
Jacket Material	Nylon Braid

Cable Data. (CX-4708/AIC)

Length	2 feet 3 inches (685 8 mm)
Jacket Material	Nylon Braid

ADDITIONAL PHYSICAL DATA:

Headband Data:

Type	Single band, adjustable
Material	Plastic covered steel
Connector type	Phone plug

TECHNICAL DESCRIPTION

INPUT

Quantity of Earphones	2
Nominal Impedance	10 ohms (in parallel)
Frequency Range	100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA

ENVIRONMENTAL LIMITATIONS.


Temperature	-55° to +85° C
Altitude	Sea level to 25,000 feet

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
82872	10557
80058	H-154/AIC

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET, H-158/AIC
(APPLICABLE SPECIFICATION MIL-H-83511)

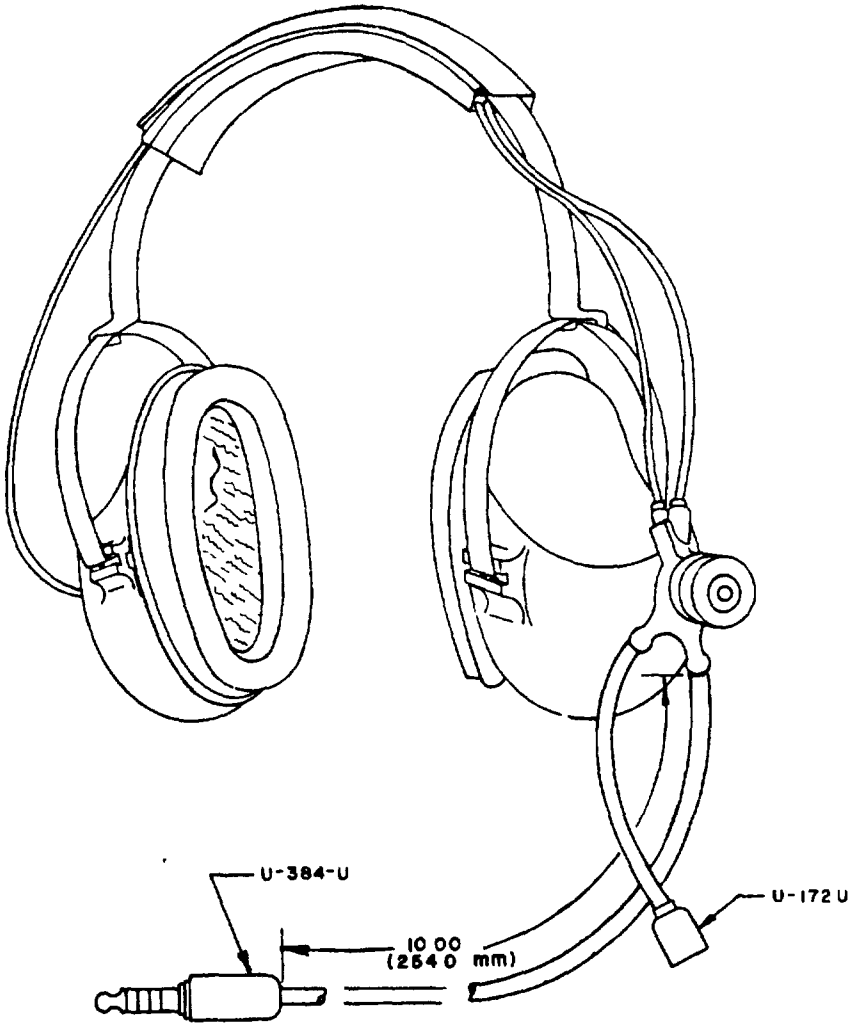

FUNCTIONAL DESCRIPTION:

The H-158/AIC is a headband type headset intended for use at low altitudes as part of Intercommunication Set AN/AIC-10( ) to provide communication of high intelligibility under the extreme noise conditions encountered in Military Aircraft.

CONSISTS OF

2 Earphones H-143/AIC
2 Earphone Shells MX-2508/AIC and MX-3473/AIC
1 Headband MX-2506/AIC
2 Cord Assemblies CX-4434/U and CX-4435/U
1 Microphone Bracket MT-2007/AIC
1 Connector Telephone plug type U-174/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

RELATIONSHIP TO SIMILAR EQUIPMENT

Headset H-158/AIC is similar to headset-microphone H-157/AIC, except for the microphone.

PHYSICAL DESCRIPTION:

Earphone Dimensions:	
Nominal Diameter	2 inches (50.8 mm)
Depth	0.45 inches (11.43 mm)
Cord Data: (CX-4434/U)	
Length	1 foot 4 inches (406.4 mm)
Jacket Material	Nylon braid
Cord Data: (CX-4435/U)	
Length	2 feet 4.50 inches (723.9 mm)
Jacket Material	Nylon braid

ADDITIONAL PHYSICAL DATA

Headband Data:	
Type	Single Band
Construction	Extruded plastic webbing over two steel wires
Connector Data:	
Number of Connectors	1
Connector Type	Telephone Plug
Earphone Weight	35 Grams Max.

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT	
Quantity of Earhones	2
Nominal Impedance	10 ohms (in parallel)
Frequency Range	100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA:


ENVIRONMENTAL LIMITATIONS:	
Temperature	-55° to +85° C
Altitude (Operation	25,000 feet
Altitude (Transportation)	50,000 feet

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058 82872	H-158/AIC 10558

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET, H-216( )/U
(APPLICABLE SPECIFICATION: MIL-H-55353)

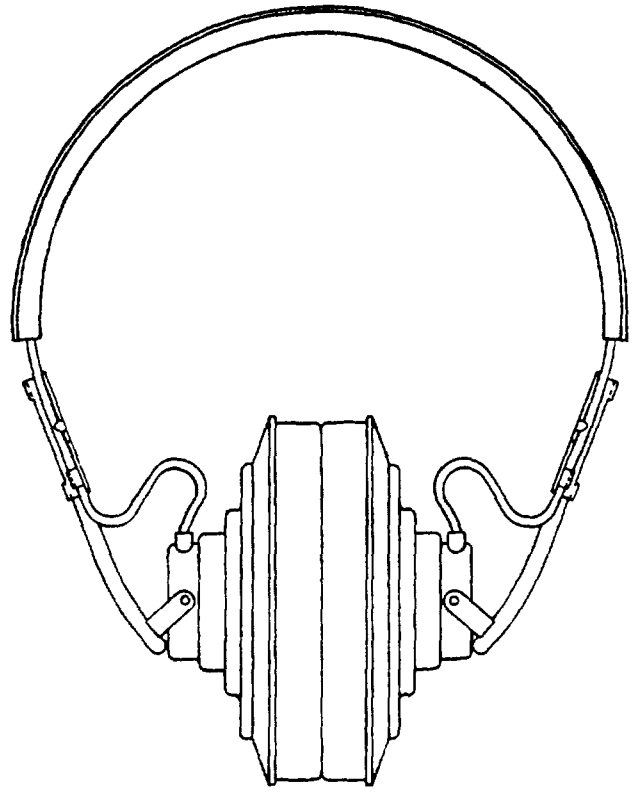

FUNCTIONAL DESCRIPTION

This headset has an extended frequency range of 100 to 7,000 Hz This range makes the headset useful for such applications sonar.

CONSISTS OF:

2	Earphones - H-301/U
1	Headband and Cover - HB-7
1	Plug
2	Earphone Cushions

RELATIONSHIP TO SIMILAR EQUIPMENT:

PHYSICAL DESCRIPTION:

Dimensions:

Width	6.25 inches (158.75 mm)
Length (Extended)	9.06 inches (230.12 mm)
Earphone Cushion:	
Height	4 38 inches (111 25 mm)
Depth	3 44 inches (87 38 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION: (Cont)

Cable Data:

Length	72 inches (1829 mm)
No. of Conductors	2
No. of Connectors	1
Connector Designation	PJ-054R
Jacket Material	Cloth

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Stainless Steel
Cover	Black Vinyl
Type	Double Band Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Nominal Impedance	600 ohms
Frequency Range	100 to 7,000 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:


Pressure Cycling	0 to 50,000 feet
Shock	Six-foot drops onto concrete surface with minimal electrical and physical damage.
Salt Spray	5% Salt Solution

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80063	H-216 ( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET, H-251/U
(APPLICABLE SPECIFICATION: MIL-H-83511)

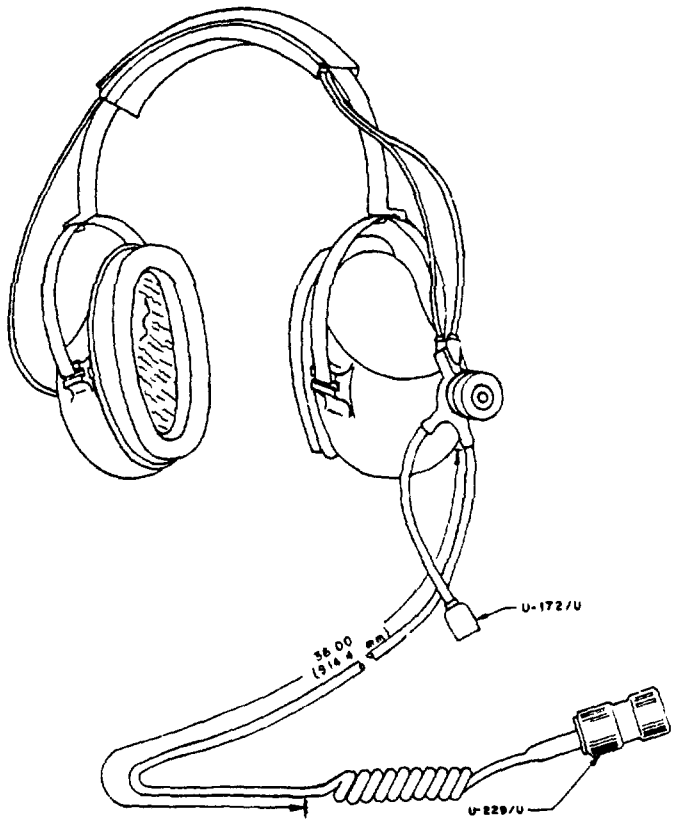

FUNCTIONAL DESCRIPTION:

This headset is suitable for outdoor use with manpack radio sets and fits under the infantryman helmet M-1 and provides maximum comfort consistent with the electrical and acoustical requirements.

CONSISTS OF:

1	Adjustable Headband
2	Plastic Earcups
2	Dynamic Moving Coil Earphones
1	Retractile Cord
1	Plug - U-182BU

RELATIONSHIP TO SIMILAR EQUIPMENT:

This headset was designed for a replacement (electrical, mechanical, and performance) of the H-140/GR headset, with a lighter weight acoustic accessory

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

PHYSICAL DESCRIPTION:

Dimensions: (Earphone)

Depth	1.219 inches (30.96 mm)
Width	3.5 inches (88.90 mm)
Height	4.5 inches (114.30 mm)

Cable Data:

Length (extended)	72 inches (1829 mm) (maximum)
Length (retracted)	20 inches (508 mm) ±2 inches (50 8 mm)
No. of Conductors	5 (4 conductors, one shield)
No. of Connectors	1
Connector Designation	Plug U-182 B/U
Jacket Material	Rubber

ADDITIONAL PHYSICAL DATA:

Headband Data:

Material	Vinyl Covered Cloth
Type	Double Band, Adjustable

TECHNICAL DESCRIPTION: (HEADSET)

INPUT

Quantity of Earphones	2
Terminating impedance at connector	500 ohms ± 20 percent
Frequency Range	20 to 3,500 Hz

ADDITIONAL TECHNICAL DATA:

Environmental Limitations:

Altitude, operating	0 to 10,000 feet
Altitude, nonoperating	0 to 50,000 feet
Shock	12 five-foot drops onto concrete surface faced with 1/8 inch asphalt tile, with minimal electrical and physical damage. Height of drop - 6 feet and temperature of -40°F.
Dust	Resistant
Immersion	Resistant
Blast	Resistant
Temperature, operating	-40° to +120°F with solar radiation
Temperature, nonoperating	-65° to +155°F
Moisture Resistance	Resistant
Vibration	Resistant
Bounce (Loose Cargo)	Resistant
Salt Fog	Resistant
Fungus	Resistant

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.


REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80063	H-251/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 402

HEADSET-MICROPHONE, H-157/AIC
(APPLICABLE SPECIFICATION: MIL-H-83511)

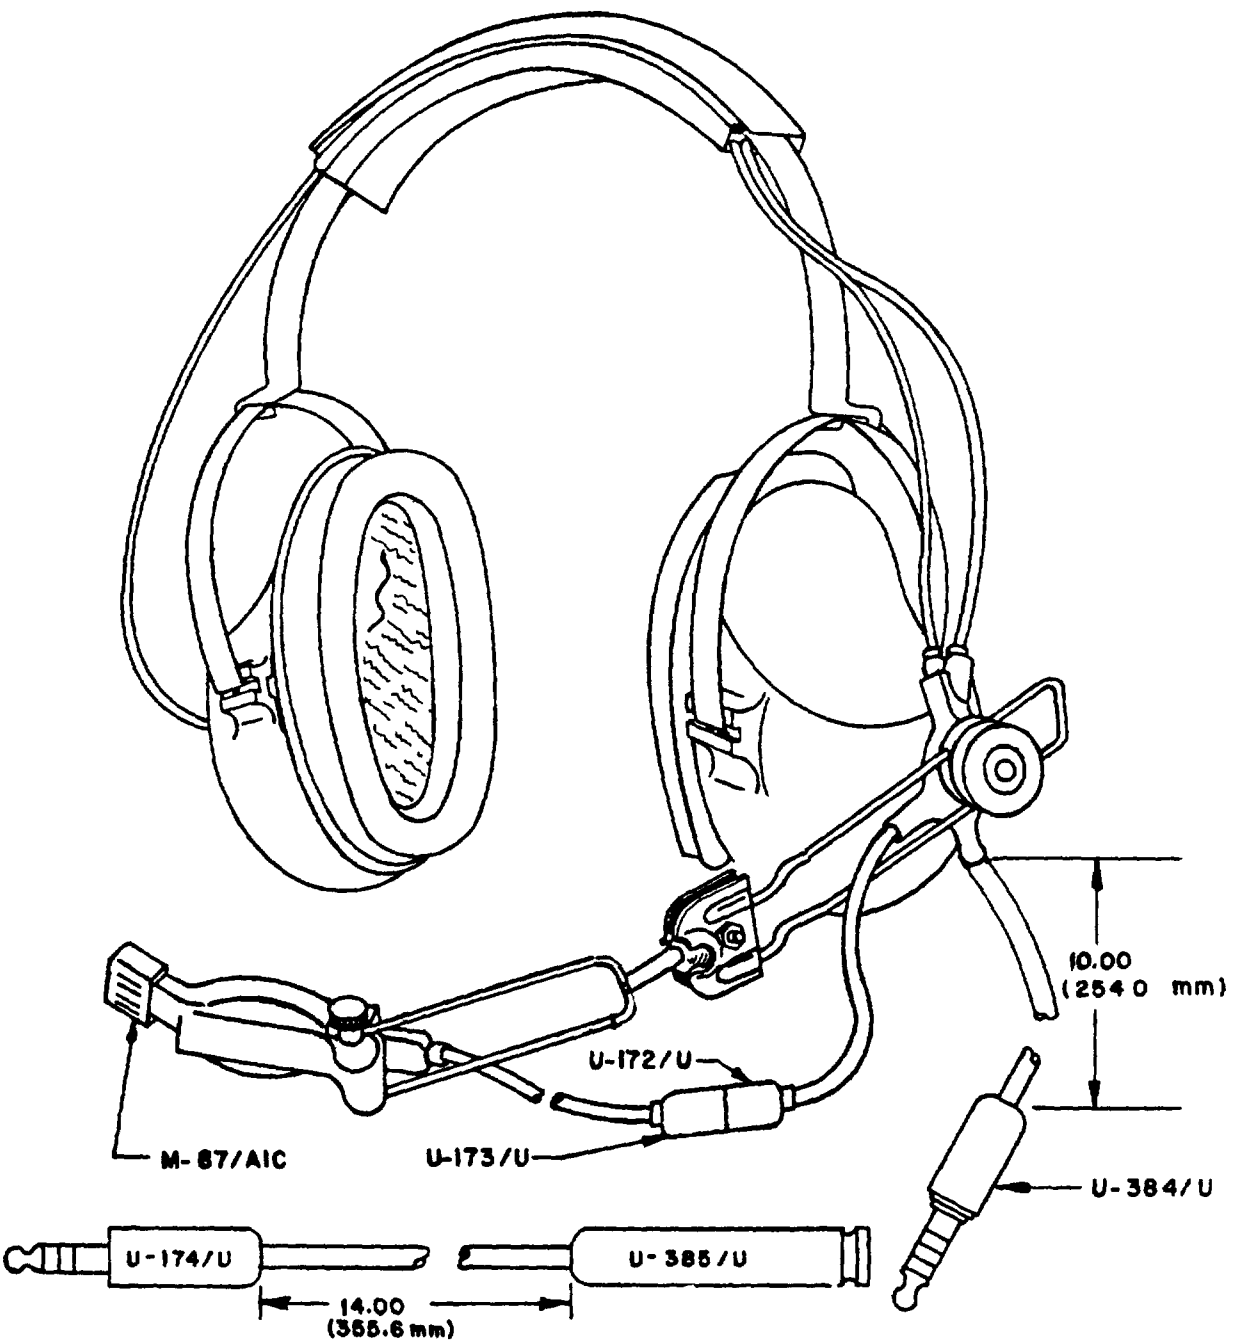

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FUNCTIONAL DESCRIPTION:

The H-157/AIC headset-microphone is used as part of Intercommunications Set AN/AIC-10( ) at low altitudes to provide high-intelligibility communication under the extreme noise conditions encountered in military aircraft and to provide maximum comfort and minimum fatigue compatible with optimum intelligibility.

CONSISTS OF:

2	Earphones	H-143/AIC
2	Earphone Shells	MX-2508/AIC and MX-3473/AIC
1	Headband	MX-2506/AIC
2	Cord Assemblies	CX-4434/U and CX-4435/U
1	Microphone Bracket	MT-2007/AIC
1	Microphone	M-87/AIC
1	Cord Assembly	CX-4434/U
1	Connector	U-174/U

RELATIONSHIP TO SIMILAR EQUIPMENT:

Similar to headset H-158/AIC except for the microphone.

PHYSICAL DESCRIPTION:

Earphone Dimensions:

Nominal diameter	2 inches (50.8 mm)
Depth	0.45 inches (11.43 mm)
Microphone Dimensions	Not available

CORD DATA: (CX-4434/AIC)

Length	1 foot 4 inches (406.4 mm)
Jacket Material	Nylon braid

CORD DATA: (CX-4435/AIC)

Length	2 feet 4-1/2 inches (723.9 mm)
Jacket Material	Nylon braid

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type	Telephone plug
Connector Designation	U-174/U

Headband Data:

Type	Single band
Construction	Extruded plastic web between two headband wires

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL PHYSICAL DATA: (Cont)

Mounting and Suspension Data:

Microphone - - - - - - - - - - - - - - - - - Mounted on bracket which fits either earcup and locks when bracket thumbscrew is tightened.

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - - - - - - Not applicable

OUTPUT

Nominal Impedance - - - - - - - - - - - - 3.5 ohms
Frequency Range - - - - - - - - - - - - - 200 to 5,000 Hz

TECHNICAL DESCRIPTION (EARPHONE)

INPUT

Quantity of Earphones - - - - - - - - - - - 2
Nominal Impedance - - - - - - - - - - - - 10 ohms (in parallel)
Frequency Range - - - - - - - - - - - - - 100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA

ENVIRONMENTAL LIMITATIONS:


Temperature - - - - - - - - - - - - - - - - - -55° to +85° C
Altitude - Up to 35,000 feet

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058 82872	H-157/AIC 10057

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET-MICROPHONE, H-161C/GR
(APPLICABLE SPECIFICATION: MIL-H-83511)

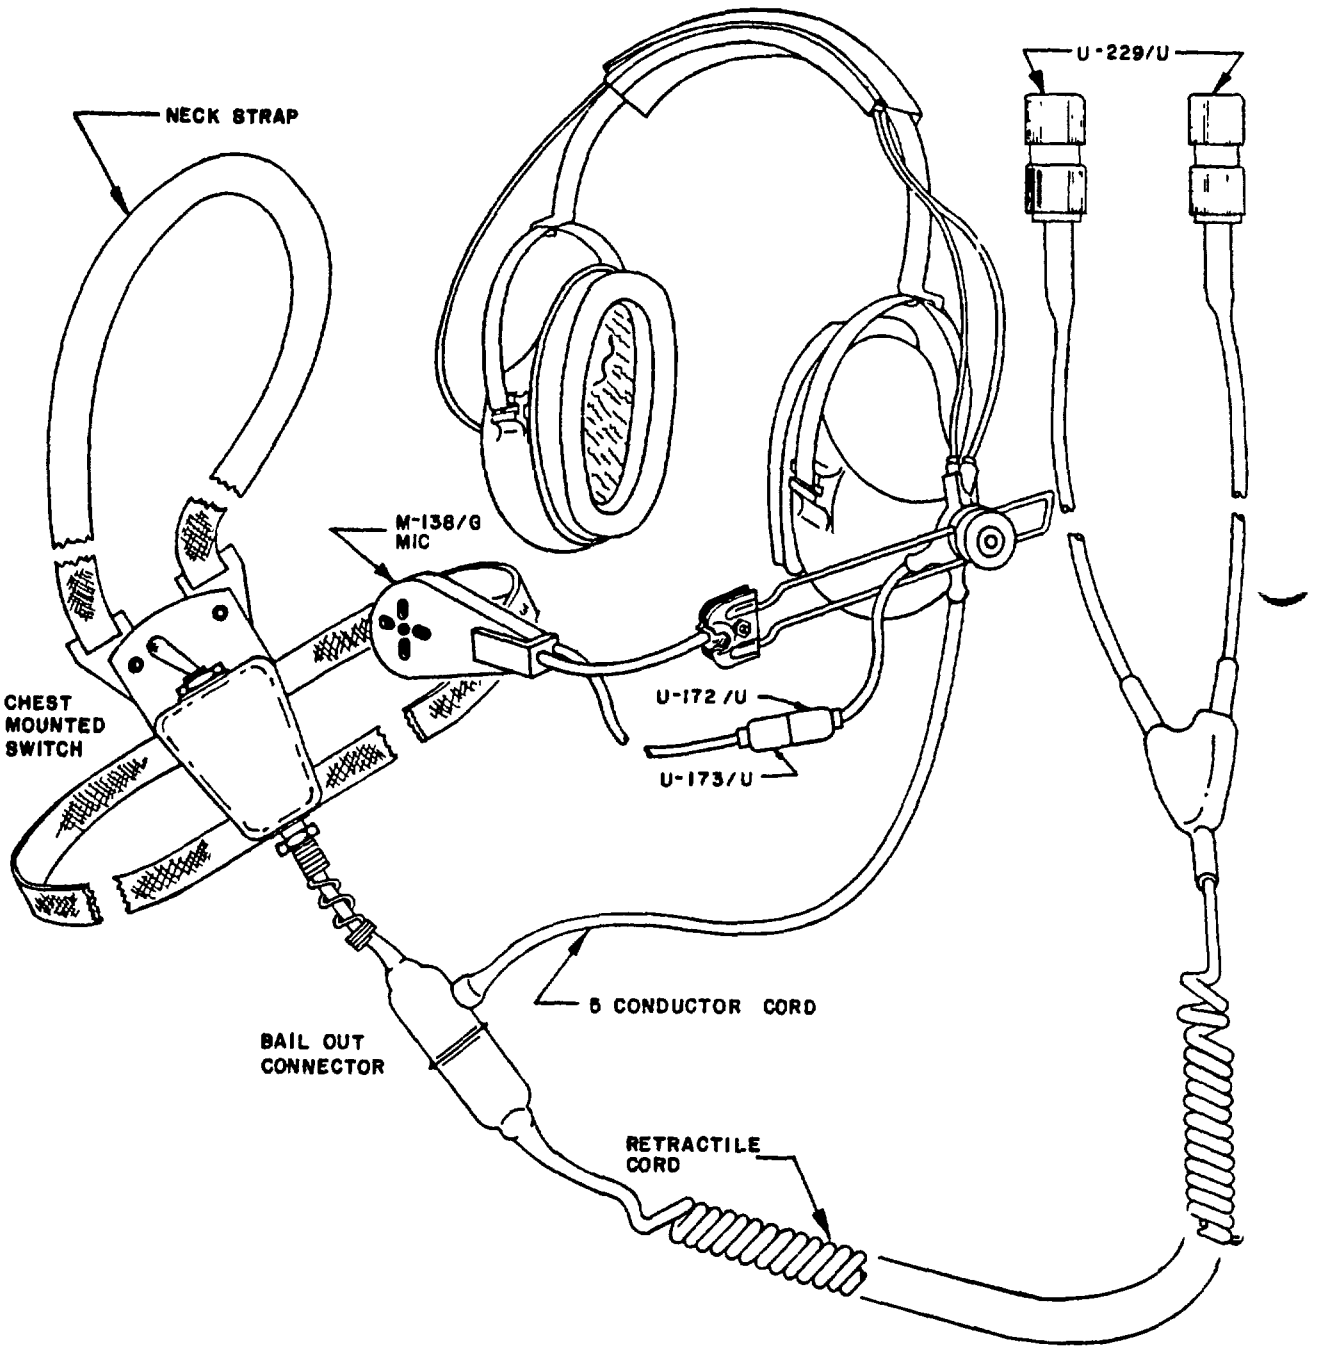

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FUNCTIONAL DESCRIPTION:

The item is a headset-microphone with a switch chest-plate. It provides facilities for transmission and reception of voice-frequency speech signals. It can be used with portable and vehicular radio sets where background noise is medium to high. It can be worn under the M1 infantry helmet, and is used where free hand operation is required.

CONSISTS OF:

2	Earphones, Dynamic Type, H-269/G
2	Cords, Connector to Bailout
1	Microphone, Dynamic Type, M-138/U
1	Cord, Retractile
1	Connector, Bailout Plug
1	Switch, Push to Talk, Lock on for Interphone, and Hold Position for Radio Operation

RELATIONSHIP TO SIMILAR EQUIPMENT:

Handset H-138( )/GR
Headset, electrical H-139( )/GR
Headset, electrical H-140( )/GR
Headset-chestset, electrical H-141( )/GR
Headset-microphone H-161( )/GR
Handset H-207( )/VRC
Headset, electrical H-227( )/U
Microphone, dynamic M-80( )/GR
Microphone, dynamic M-81( )/GR
Modification kit, electronic equipment MK-567/G
Headset-microphone kit MK-525( )/G
Headset-microphone kit MK-526( )/G

This equipment is used as audio accessories for radio set AN/VRC-12.

PHYSICAL DESCRIPTION

Earphone Dimensions- - - - - - - - - - - - - Not available
Microphone Dimensions - - - - - - - - - - - Not available

CORD DATA: (CONNECTOR TO BAILOUT)

Length- 18 inches (457.2 mm)

CORD DATA: (RETRACTILE, BAILOUT PLUG TO JUNCTION)

Length (Retracted) - - - - - - - - - - - - - - 12 inches (304.8 mm)
Length (Extended)- - - - - - - - - - - - - - - 6.5 feet (1,981.2 mm)

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type- - - - - - - - - - - - - - - - TBS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL PHYSICAL DATA: (Cont)

Mounting and Suspension Data:

Microphone - - - - - - - - - - - - - - - - - - Mounted on adapter fastened to left side of headband
Earphone - - - - - - - - - - - - - - - - - - - Suspended on headband

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - - - - - - - Not applicable

OUTPUT

Nominal Impedance- - - - - - - - - - - - - - 150 ohms (with transformer)
Frequency Range - - - - - - - - - - - - - - - 300 to 3,500 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones - - - - - - - - - - - - 2
Nominal Impedance- - - - - - - - - - - - - - 1,000 ohms
Frequency Range - - - - - - - - - - - - - - - Not available

ADDITIONAL TECHNICAL DATA:


ENVIRONMENTAL LIMITATIONS:

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
80058	H-161/GR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET-MICROPHONE, H-172/U
(APPLICABLE SPECIFICATION MIL-H-83511)

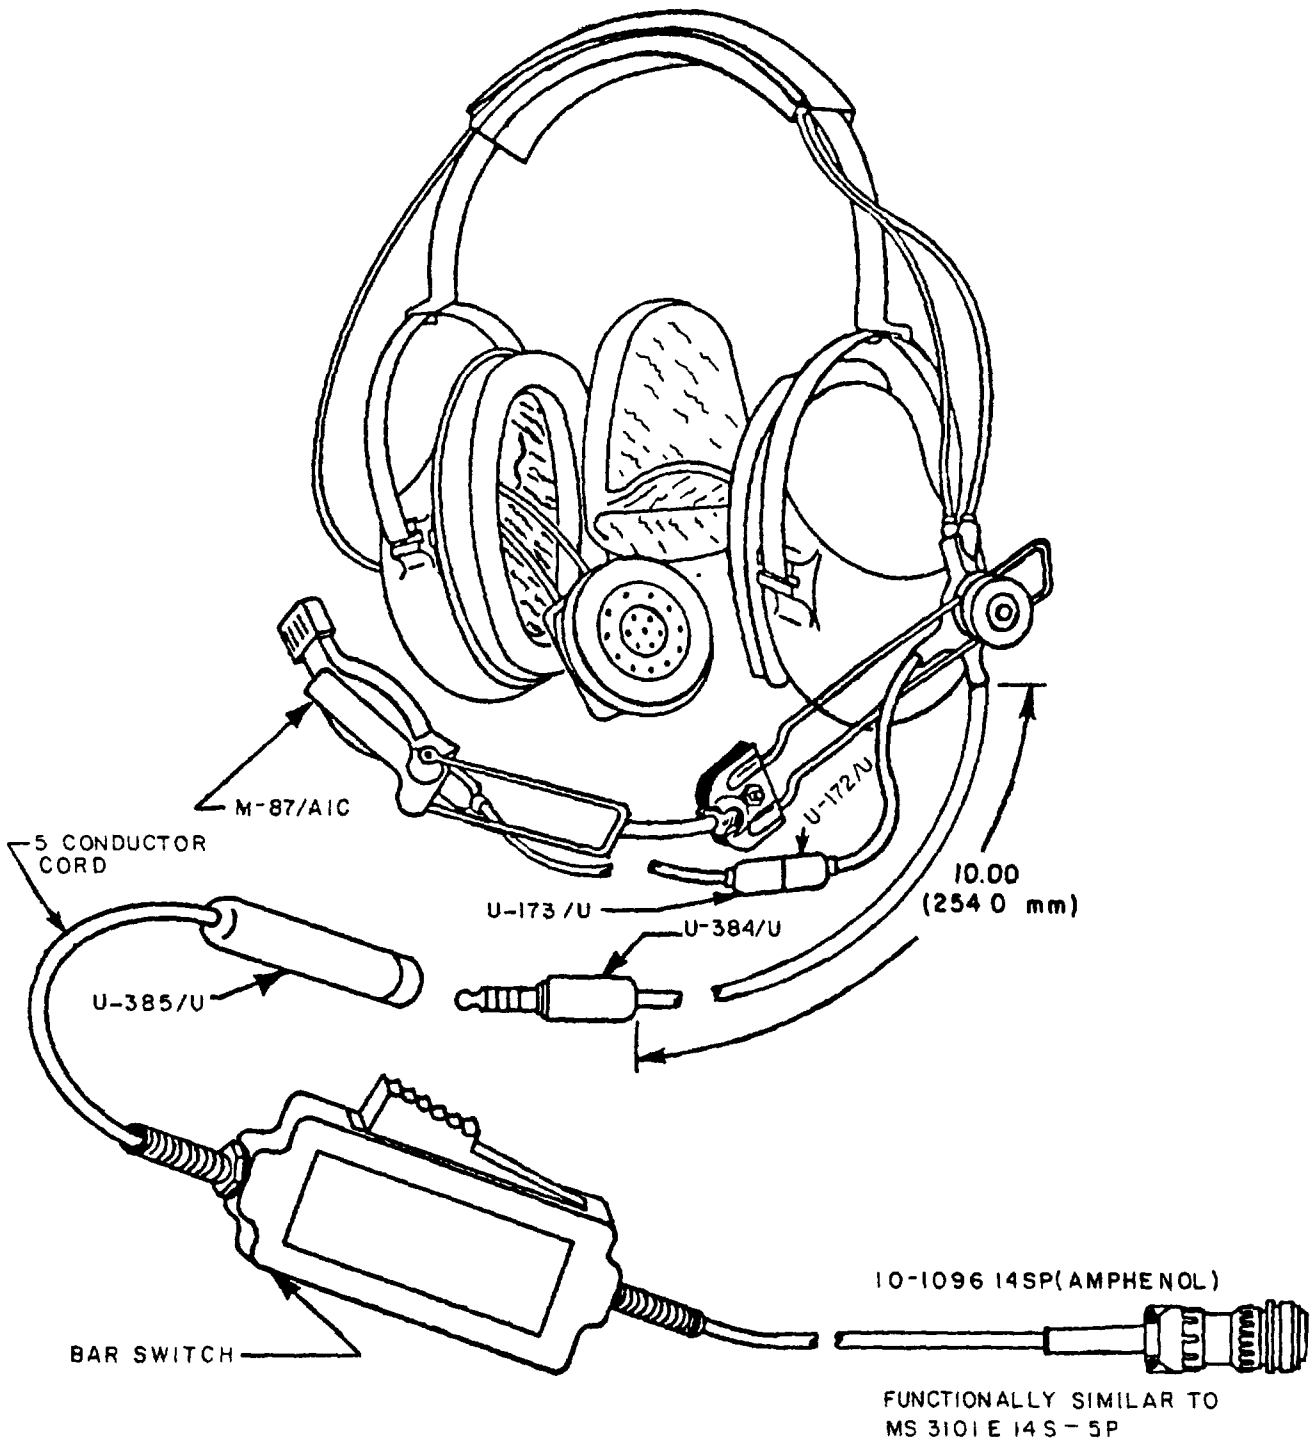

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FUNCTIONAL DESCRIPTION·

The H-172/U is an extremely low-distortion, dynamic, noise-canceling headset-microphone which contains a transistor preamplifier in the headband.

CONSISTS OF:

1	Dynamic receiver element
2	Earphone cushions
1	Headband assembly, PC-16
1	Microphone, M-87/AIC
1	Cord (Microphone), MMOP-5
1	Cord assembly
1	Cord and plug assembly, Plug U-173/U
1	Connector 10-109614S-5P
1	Transistor preamplifier
1	In-line switch, D.P.S.T.

RELATIONSHIP TO SIMILAR EQUIPMENT·

PHYSICAL DESCRIPTION.

Dimensions:

Headband width (unextended) - - - - - - -	6-1/2 inches (165.1 mm)
Earphone face (with cushion) - - - - - - -	4-3/4 x 5-3/8 inches (120.65 mm x 136 53 mm) oval
Earphone depth (with cushion) - - - - - -	2-1/4 inches (57.15 mm)

Cord Data:

Length (headband to switch) - - - - - - -	24 inches (609.6 mm)
Length (switch to connector) - - - - - - -	51 inches (1,295.4 mm)
Number of conductors - - - - - - - - - -	5
Insulation - - - - - - - - - - - - - - - - -	Synthetic rubber

TECHNICAL DESCRIPTION·

Earphone·

Impedance (at 1,000 Hz) - - - - - - - - -	600 ohms
Frequency range - - - - - - - - - - - - -	100 to 4,500 Hz

Microphone:

Impedance- - - - - - - - - - - - - - - - -	3 ohms
Frequency range - - - - - - - - - - - - -	300 to 4,500 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

ADDITIONAL TECHNICAL DATA

Environmental Limitations:


Temperature (nonoperating) - - - - - - - - - -60° to +75° C
Temperature (operating)- - - - - - - - - - - 0° to +50° C
Resistance to salt spray and humidity

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
82872	H-172/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET-MICROPHONE, H-182( )/PT
(APPLICABLE SPECIFICATION: MIL-H-55460)

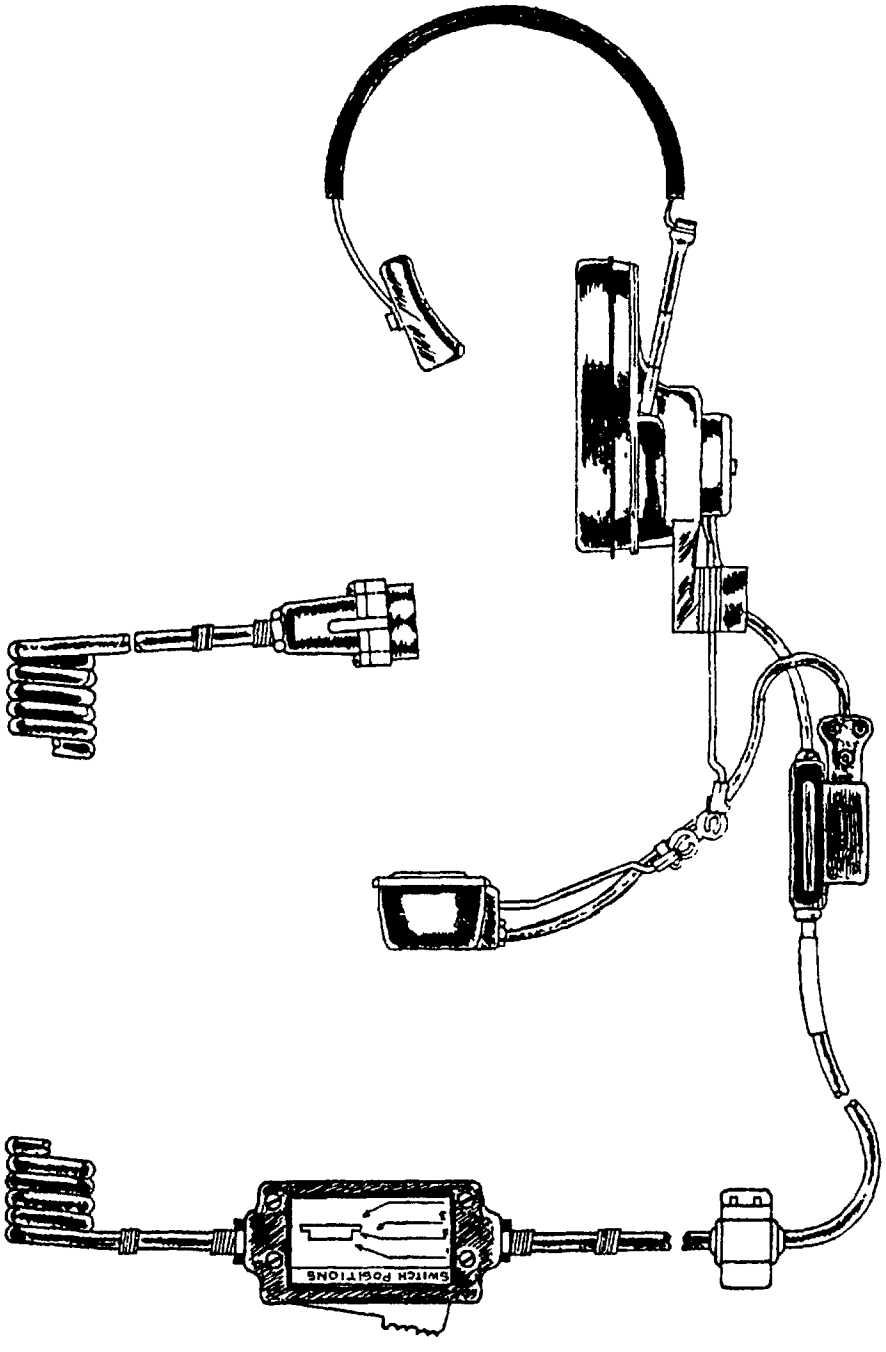

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FUNCTIONAL DESCRIPTION:

The H-182( )/PT has a single earphone and an adjustable, boom mounted microphone. The headset-microphone is intended to be used with telephone TA-312 and switchboard SB-22, and it is made to be worn under the combat helmet M-1.

CONSISTS OF:

1	Earphone element, magnetic type, TA-235( )PT
1	Earcup, with cushion
1	Headband, single type
3	Cord assemblies, no type number
1	Microphone bracket, wire type
1	Microphone
2	Connectors, U-161/U and U-055
1	Clothing clip, no type number
1	Switch box, no type number

RELATIONSHIP TO SIMILAR EQUIPMENT

The H-182( )/PT replaces the H-144( )/U and is a part of SB-22/PT and SB-22A/PT

PHYSICAL DESCRIPTION:

Earphone Dimensions	Not available
Microphone Dimensions	Not available

CORD DATA: (RETRACTILE)

Length (retracted)	12 inches (304.8 mm)

ADDITIONAL PHYSICAL DATA:

Connector Data:

Connector Type	Plug
Connector Designation	U-161/U

Headband Data:

Type	Single band
Construction	Vinyl covered with a vinyl head pad

Mounting and Suspension Data:

Microphone	Mounted on bracket which fits earcup and locks for optimum tacking position

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION: (MICROPHONE)

Input Operating Resistance	125 mA
Resistance	35 ohms dc
Frequency Range	800 to 4,000 Hz

TECHNICAL DESCRIPTION: (EARPHONE)

INPUT

Quantity of Earphones	1
Nominal Impedance	150 ohms
Frequency Range	100 to 5,500 Hz

ADDITIONAL TECHNICAL DATA:

Switch:

Position 1	For monitoring telephone or radio
Position 2	For "lock-on" telephone operation
Position 3	Nonlocking, for radio
Position 4	Push to talk for radio

Microphone connector pins molded into cable assembly. Clothing clip provided on cable assembly.

ENVIRONMENTAL LIMITATIONS:

Fungus	Resistant
Salt Fog	Resistant
Blast	Resistant
Sand and Dust	Resistant
Elevation	
Operating	Up to 15,000 feet
Nonoperating	Up to 50,000 feet
Humidity	Resistant
Immersion	3 feet water
Bounce	Package tester model 1,000SC and SC-A-46439 or equal
Vibration	5 hours, amplitude 0.03 inch .10 to 55 Hz
Drop	6 feet (1,828.8 mm) on concrete
Endurance	100 hours, 0.02 volt at 60 Hz ac
Temperature	
Operating	+125° to -40° F
Nonoperating	+160° to -80° F


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

REFERENCE DATA


MANUFACTURER CODE	PART NUMBER
80058 18068	H-182( )/PT 21954

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

HEADSET-MICROPHONE KIT, MK-1564( )/AIC
(APPLICABLE SPECIFICATION MIL-H-49198(AV))

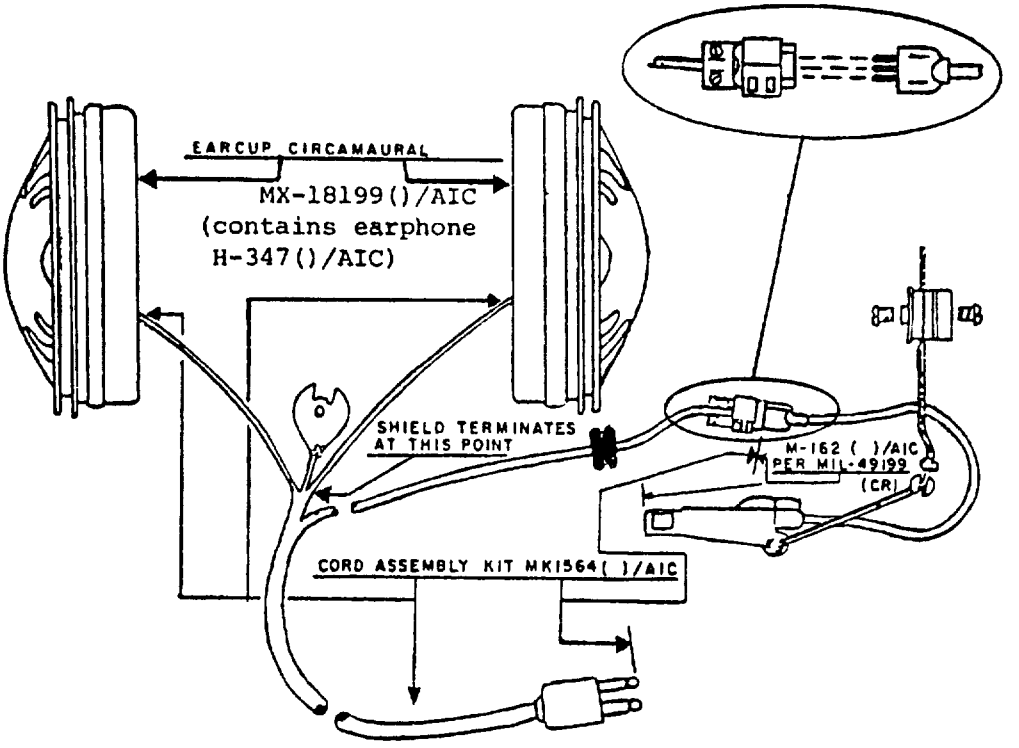

MK-1564( )/AIC, assembly of.

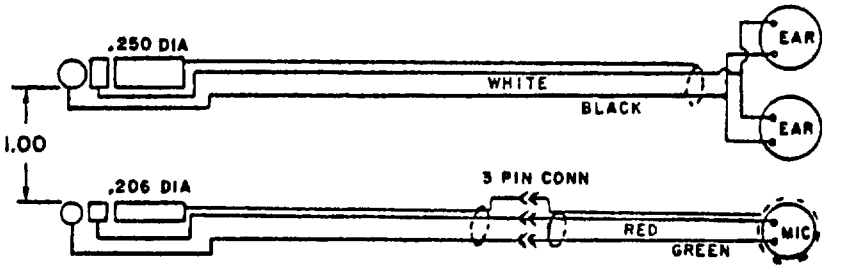

Schematic of Helmet Plug and MK-1564( )/AIC wiring with Ferromagnetic Shielded Cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FUNCTIONAL DESCRIPTION

The MK-1564( )/AIC contains a linear earcup transducer assembly with improved far field noise attenuation properties over the MK-896A/AIC. It also contains the microphone, Linear M-162/AIC which is a noise-canceling dc powered, high gain microphone The MK-1564( )/AIC is intended for use in the improved SPH-4 aviator's helmet which is part of the airborne communications system which contains the C-10414( )/ARC Intercommunication Control and will provide communications of high intelligibility under the extreme noise conditions encountered in military aircraft.

Component parts. The MK-1564( )/AIC shall be supplied with the following components

1 each	Microphone, Linear M-162/AIC, Boom Assembly (Standard Ball and Socket Type) and Cord Assembly Electrical #89282 (14 inches in length) per MIL-M-49199(CR).
2 each	Linear earcup transducer assembly, MX-18199( )/AIC, including earphone element, H-347( )/AIC, per MIL-H-49198(AV)
1 each	Cord Assembly Kit, MK-1564( )/AIC per MIL-H-49198(AV).

RELATIONSHIP TO SIMILAR EQUIPMENT

Headset-Microphone Kit MK-1564( )/AIC replaces the MK-896A/AIC when used with the new aircraft intercom, C-10414/ARC. (It is not electrically interchangeable with the MK-896A/AIC.)

PHYSICAL DESCRIPTION

Earphone Dimensions

Nominal diameter - - - - - - - - - - - - - - - -	2 inches (50.8 mm)
Depth- -	0 45 inches (11.43 mm)
Microphone Dimensions- - - - - - - - - - - - - -	Length 2 250 inches nominal Width 0.625 inches nominal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

CORD ASSEMBLY DATA: (Electro-Voice Part #89351)

Length-	Not available
Jacket Material	Nylon braid

MICROPHONE CORD DATA: (E-V Part #89282)

Length-	14 inches
Jacket Material	Nylon braid

ADDITIONAL PHYSICAL DATA:

Helmet Cord Assembly Connector Data.

Connector Type-	Twin telephone plug
Connector Designation	Not available

Microphone Cord Connector Data.

Connector Type-	3 conductor telephone plug
Connector Designation	E-V Part #17273

Mounting and Suspension Data:

Microphone-	Mounted on bracket which locks when bracket thumbscrew is tightened

TECHNICAL DESCRIPTION. (MICROPHONE)

INPUT

Operating Current	10 mA

OUTPUT

Impedance	150 ohms ±20% over 400 to 6,000 Hz frequency range
Frequency Range	400 to 6,000 Hz ±3 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

TECHNICAL DESCRIPTION (EARPHONES)

INPUT

Quantity of Earphones	2
Nominal Impedance	10 ohms (in parallel)
Frequency Range	300 to 6,000 Hz ±5 dB (when measured inside the earcup assembly as per MIL-H-49198(AV))

ADDITIONAL TECHNICAL DATA

ENVIRONMENTAL LIMITATIONS

Temperature	-55° to +85°C
Altitude	Up to 35,000 feet


REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
81134	987-0202

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

SECTION 403

HEADSET-CHESTSET, H-200/U
(APPLICABLE SPECIFICATION MIL-T-15514)

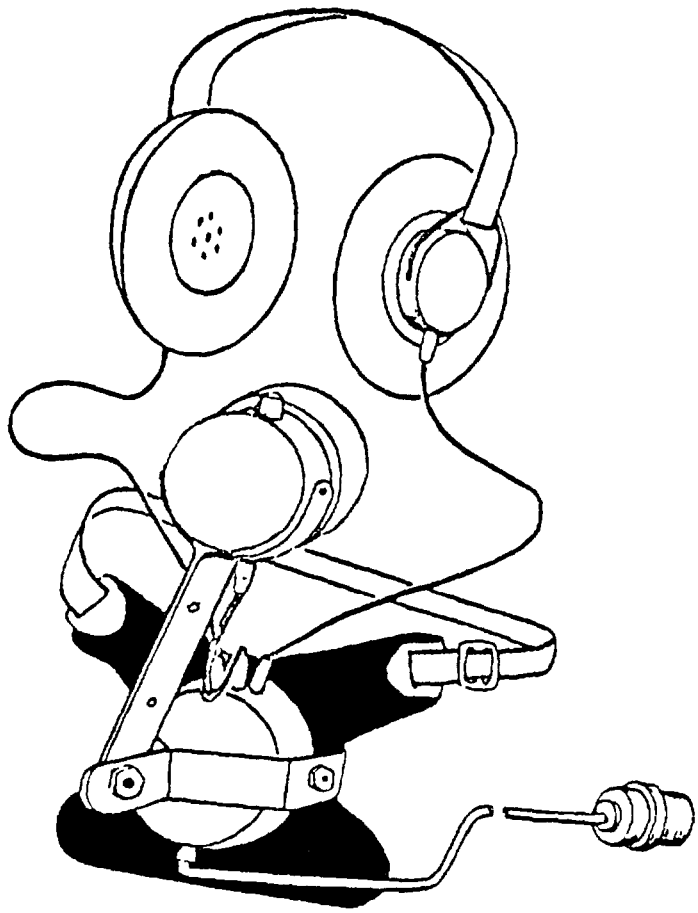

FUNCTIONAL DESCRIPTION:

The H-200/U is a sound powered headset-chest set specially designed for shipboard use. The complete set will withstand immersion and heavy salt spray.

CONSISTS OF

1 Headband
1 Transmitter Assembly
2 Receiver Assemblies
1 Chestplate
1 Junction Box
1 Receiver Cable
1 Transmitter Cable
1 Jack Plug
1 Cable Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

RELATIONSHIP TO SIMILAR EQUIPMENT:

H-202/U similar to H-200/U except equipped with cushioned hard shell ear cups H-202 is intended for use in noisey environments.

PHYSICAL DESCRIPTION:

HEADSET DIMENSIONS:

Earphone diameter (with cushion) - 4-1/2 inches (114.3 mm)
Earphone depth (with cushion) - - - 2 inches (50.8 mm)

CHEST SET DIMENSIONS:

Nominal height - - - - - - - - - -	6-1/2 inches (165.1 mm)
Nominal width - - - - - - - - - -	5-1/2 inches (139.7 mm)
Nominal depth - - - - - - - - - -	4-1/2 inches (114.3 mm)
Cord length - - - - - - - - - - - - -	20 feet (609.60 mm)
Weight - - - - - - - - - - - - - - - -	4-1/2 pounds

ADDITIONAL PHYSICAL DATA:

Ear Cushion Material - - - - - - - - -	Nylon-covered Neoprene
Chestplate Material - - - - - - - - - -	Aluminum
Junction Box Material - - - - - - - - -	Rubber
Cordset Composition - - - - - - - - -	Tinsel
Connector Designation - - - - - - - -	Navy Type S-74211
Chestplate Suspension - - - - - - - - -	Neck Strap

TECHNICAL DESCRIPTION: (MICROPHONE)

INPUT

Operating Current - - - - - - - - Not applicable

OUTPUT

Nominal Impedance - - - - - - -	60 ohms
Frequency range - - - - - - - - -	500 to 2,600 Hz

TECHNICAL DESCRIPTION: (EARPHONES)

INPUT

Quantity of Earphones - - - - - -	2
Nominal Impedance - - - - - - - -	1,200 ohms
Frequency Range - - - - - - - - -	500 to 2,500 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

REFERENCE DATA

MANUFACTURER CODE	PART NUMBER
78957	702019-375, type H-200/U 702020-230, type H-202/U
78957	701005-379
78957	702003-278
78957	702003-277
78957	701004-327
78957	702001-918
78957	702003-551
78957	702003-552
78957	702004-232
78957	702011-551

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-STD-2115 Audio Devices and Components, Selection + Use of

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTA
NECESSAI
IF MAILE
IN THE
UNITED STA

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:57Z
Check the source to verify that this is the current version before use.