GGG–C–748b
AMENDMENT—3
April 18, 1963

SUPERSEDING
Interim Amendment—2,
June 14, 1962 and
Amendment—1
July 15, 1960

FEDERAL SPECIFICATION

CUTTER, CIRCLE (ADJUSTABLE); FOR GASKETS AND WASHERS

This amendment, which forms a part of Federal Specification GGG-C-748b, dated August 21, 1959, was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

Page 1, paragraph 1.2.1: Delete "Style A.—Rectangular crossbeam." and "Style B.—Cylindrical crossbeam."

Page 1: Delete parenthetical paragraphs and substitute:

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Page 2, paragraph 2.1: Delete "MIL-P-15424—Packaging of Hand Tools for Domestic and Overseas Shipment and Storage" and substitute here and throughout this specification "MIL-H-15424 — Hand Tools; Packaging of."

Page 3, paragraph 3.10: Delete the period at end of last sentence and add "and shall be similar to figures 1 or 2."

Page 3, after paragraph 3.10.1 insert new paragraphs as follows:

3.10.1.1 *Rectangular crossbeam construction.* Unless otherwise specified (see 6.1), rectangular crossbeam construction shall be furnished. Cutters shall have a rectangular crossbeam with two integral cutting blades, or two cutting blade holders with cutters (see figure 1). The crossbeam shall be slotted to provide a suitable passage and movement of the thumbscrews for adjusting the cutter blades or cutter-blade holders to the desired setting.

3.10.1.2 *Cylindrical crossbeam construction.* When specified (see 6.1), cylindrical crossbeam construction shall be furnished. Cutters shall have a cylindrical crossbeam with two cutter blade holders and cutter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

blades (see figure 2). A flat surface shall be provided on the crossbeam to accommodate the ends of the thumbscrews and to position the holders in proper alignment.

Page 3, paragraph 3.10.2, second sentence: Delete and substitute: "The tapered square bit shank shall have an included angle of 9 degrees, plus or minus 1 degree, and shall be approximately 7/16 inch square on the large end and approximately 1-1/4 inches long."

Page 3, paragraph 3.10.5: Delete.

Page 4, paragraph 3.10.5.1: Delete and substitute:

3.10.5.1 *Cutter blades.* For cutters having a rectangular crossbeam the cutter blades shall be integral with the holder or attachable to the cutter holder. For cutters having a cylindrical crossbeam, the cutter blades shall be securely attached to the holders and be in alignment with the pivot. All cutter blades shall be in accordance with 3.3.

Page 4, paragraph 3.10.5.2: Delete and substitute:

3.10.5.2 *Cutter-blade holders.* All cutter-blade holders shall be in accordance with 3.4. The hole provided in the cutter holders for the cylindrical crossbeam shall fit the crossbeam without binding or excessive play.

Page 4, paragraph 3.10.5.3: Delete.

Page 4: In description of figure 1 delete "style A".

Page 4, paragraphs 3.10.6 through 3.10.6.3: Delete.

Page 4: In description of figure 2 delete "style B".

Page 8, paragraph 3.13.3: Delete.

Page 8, paragraph 3.13.4: Delete and substitute:

3.13.4 *Tool bit.* The tool bit shall be in accordance with type I, style 1, grade A, of OO-C-851, except tool bits shall have an overall length of 2-1/4 inches minimum when cutting end is finished ground. Type IV, style A cutters shall be provided with a 3/16-inch tool bit. Type IV, style B cutters shall be provided with a 1/4-inch tool bit. Each bit shall be sharpened in accordance with the manufacturer's standard practice, and the bit may be otherwise modified to fit the bit holder at the manufacturer's option.

Page 8, paragraph 3.13.5, second sentence: Delete and substitute: "The shank shall have an included angle of 9 degrees, plus or minus 1 degree, and shall be approximately 7/16 inch square on the large end and approximately 1-1/4 inches long."

Page 8, paragraph 3.13.5.1: Delete and substitute:

3.13.5.1 *Drill.* The drill shall be of carbon or high-speed steel. Approximately 75 percent of the original flute length of the drill shall show a minimum hardness on the margin of 58 on the Rockwell "C" scale. The minimum allowable hardness of the land at the shank end shall be 52 on the Rockwell "C" scale. The drill shall have a straight shank of a length suitable for the purpose intended. The drill shall be 1/4 inch in diameter, and shall have a shank hardness in accordance with the manufacturer's commercial practice.

Page 8, paragraph 3.13.5.2, first sentence: Delete the following: "mild sheet steel up to 16-gage (0.0598 inch)" and substitute "up to 1/16-inch thick".

Page 9, figure 7: Delete and substitute:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

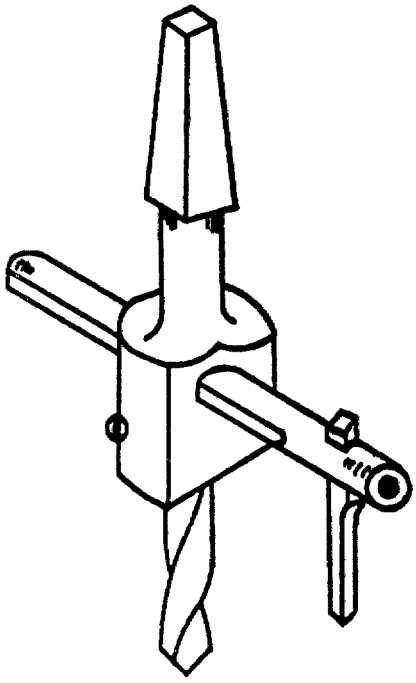


FIGURE 7.—Type IV, style A, drill pivoting, bit shank.

Page 9, paragraph 3.13.6.1: Delete and substitute:

3.13.6.1 *Drill.* The drill shall be of high speed steel. Approximately 75 percent of the original flute length of the drill shall show a minimum hardness on the margin of 62 on the Rockwell "C" scale. The minimum allowable hardness of the land at the shank end shall be 52 on the Rockwell "C" scale. The drill shall have a straight shank of a length suitable for the purpose intended. The drill shall be either 1/4 or 3/8 inch in diameter, and shall have a shank hardness in accordance with the manufacturer's commercial practice.

Page 9, paragraph 4.1: Delete and substitute:

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Page 9, paragraph 4.2.2, line 4: Delete "offered" and "Government".

Page 10, paragraph 4.2.3: Delete the final period and add "with an acceptable quality level of 1.5 defects per 100 units."

Page 12, paragraphs 4.7 and 4.8: Delete and substitute:

4.7 **Examination of preparation for delivery.** Unless otherwise specified herein, an examination shall be made to determine compliance with preservation, packaging, packing, and marking requirements in accordance with the provisions set forth in MIL-H-15424.

Page 12, paragraph 6.1, after item "(*c*)" add "(*d*) Specify when cylindrical crossbeam construction is to be furnished (see 3.10.1.2)." and reletter items "(*d*)" and "(*e*)" to "(*e*)" and "(*f*)".

Page 13, paragraph 6.2: Delete and substitute:

6.2 **Transportation description.** Transportation description and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed. Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY CUSTODIANS:
Army—GL
Navy—Sh
Air Force—MOA

☆ U.S. GOVERNMENT PRINTING OFFICE: 1969—G33055/970

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.