GGG-C-771d
January 31, 1964

SUPERSEDING
Int. Fed. Spec. GGG-C-771c (GSA-FSS)
November 27, 1962 and
Fed. Spec. GGG-C-771b
September 13, 1956

FEDERAL SPECIFICATION

CUTTERS, PIPE; AND CUTTERS, TUBE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand-operated tools used in cutting the various types of pipe and tubing in commercial use.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to include only those most generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* Pipe and tube cutters shall be of the following types, classes, and styles as specified (see 6.1):

Type I.—Pipe cutter.

Class 1.—Sliding feed member.

Style A.—Three cutter wheels.

Style B.—One cutter wheel and two rollers.

Class 2.—Pivoting feed member.

Style A.—Three cutter wheels.

Style B.—One cutter wheel and two rollers.

Type II.—Tube cutter.

Class 1.—Enclosed feed mechanism.

Class 2.—Sliding feed member.

Class 3.—Pivoting feed member.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Military Specification:

MIL-H-15424—Hand Tools; Packaging of.

Military Standard:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

National Bureau of Standards Handbook:

H28—Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of cutters otherwise conforming to this specification.

3.2 Material. The composition of the material and the heat-treatment employed shall be such as to produce cutters complying with the requirements hereinafter specified. Cutter wheels shall be fabricated from a quality tool steel properly hardened and tempered as hereinafter specified.

3.3 Design and construction. The cutters shall be suitable for use in cutting the specified material while requiring only normal manual effort by the operator. Cutters shall be so constructed that no part will become detached while in use.

3.3.1 *Minimum cutting range.* Minimum cutting range (from minimum to maximum) specified in tables I, IV, V, VI, and VII shows the minimum range required for cutters, but is not intended to preclude cutters whose cutting capacity exceeds the range specified, provided all other specification requirements are met.

3.4 Finish. Unless otherwise specified in the contract or order, the surface characteristics, protective coatings, and plating shall be in conformance with standard manufacturing practice.

3.5 Identification marking. Each cutter shall be marked in a permanent and legible manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.6 Interchangeability. The bearing and finished surfaces for all cutter parts shall be finished to limits which will insure interchangeability of all like parts of the same size and type of cutter of any one manufacturer, without further machining or hand fitting.

3.6.1 *Threads.* All threads shall conform to National Bureau of Standards Handbook H28 as to shape and form of threads, and shall be within the limiting tolerances specified for class 1 or class 2 fit.

3.7 Concentricity. Concentricity of the cutter wheels and rollers shall be within 0.006 inch total indicator reading when checked while being rotated on their respective supporting pins.

3.8 Type I, pipe cutter. Type I pipe cutters shall consist essentially of a frame (or body), a feed member, a feed rod with handle, three cutter wheels or one cutter wheel and two rollers, and three pins on which the cutter wheels or rollers operate.

3.8.1 *Frame (or body).* The frame (or body) shall be of forged steel, malleable iron, ductile iron or other suitable alloy, and

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

shall possess adequate strength to satisfactorily cut the maximum rated size of pipes specified in 1.1 with no appreciable deformation in any section. The frame (or body) shall be finished and fitted to insure proper alignment of the cutter wheels and permit a free movement of the feed member under maximum operating conditions. The frame (or body) shall extend for a substantial mounting of the feed screw. Body of cutters used with power equipment shall extend to adequately protect the feed screw threads.

3.8.2 *Feed screw.* The feed screw shall be steel and of sufficient size to withstand the bending and torque loads without evident distortion when in use. The portion of the feed screw which bears on the siding feed member shall be hardened to show a minimum hardness of Rockwell C45. The hardening of the threaded portion of the feed screws shall be at the option of the manufacturer.

3.8.3 *Handle.* A smoothly finished, suitably shaped handle, affording a comfortable grip, shall be firmly fixed to the outer end of the feed rod. The handle shall be of steel or other suitable material.

3.8.4 *Cutter wheels.* Cutter wheels shall be of good quality alloy steel, hardened and tempered to show at any point on the wheel blade a Rockwell C hardness of 56 to 64; shall rotate freely on supporting pins; have hubs of a size to provide adequate bearing surface and cutter alignment; and shall be so designed as to satisfactorily perform their function with the maximum efficiency and the minimum of replacement.

3.8.5 *Rollers.* Rollers shall be of a good quality steel properly hardened to show a Rockwell C hardness of 55 to 63 and shall rotate freely.

3.8.6 *Pins.* Pins shall be of good quality steel, heat treated so that the bodies (of pins) show a Rockwell C hardness of 55 to 63. Pins shall properly support and permit rotation of the cutter wheels and rollers, and shall be easily replaceable.

3.8.7 *Class 1, sliding feed member.* The sliding feed member shall be of steel, malleable iron, ductile iron, or other suitable metal and finished to insure a smooth free sliding adjustment. Means shall be provided to prevent detachment of the feed screw under normal operating conditions. The feed members shall be of sufficient strength to provide adequate support and proper alignment when subjected to hard usage. A wear plug of hardened steel shall be provided at the point of feed screw contact to provide easier cutting action and minimize wear. (Additional means may be provided at the option of the manufacturer.) Class 1 pipe cutters shall conform to table I and shall be similar to figure 1.

TABLE I.—*Type I, class 1, styles A and B pipe cutters, sliding feed member*

Minimum cutting range, nominal pipe size		Weight of cutter
Minimum	Maximum	Maximum
Inches	*Inches*	*Pounds*
1/8	1	3-1/2
1/8	1-1/4	7
1/8	2	7-1/2
1/2	2	7-1/2
1-1/2	3	15
2	4	20
2-1/2	4	20
4	6	25

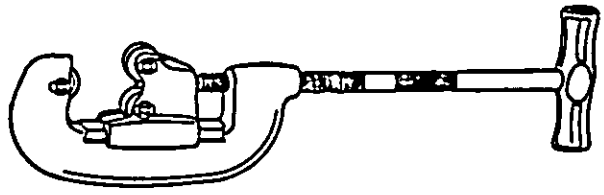


FIGURE 1.—Type I, styles A and B pipe cutter, sliding feed member.

3.8.7.1 *Replaceable cutter wheels and rollers for type I, class 1.* When replaceable cutter wheels and rollers for type I, class 1 pipe cutters are required, applicable designation in accordance with tables II or III shall be specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

TABLE II.—*Cutter wheels for type I, class 1, styles A and B pipe cutters*

Cutter[1] wheel designation	Pipe cutter range; nominal pipe size	A Min.	B Min.	C Min.	D Min.	E Min.	F ± 0.005
	Inches	*Inches*	*Inch*	*Inch*	*Inch*	*Inch*	
A	1/8—1	1	1/2	1/4	1/16	1/4	1/8
B	1/8—1-1/4	1-3/16	9/16	5/16	1/16	1/4	5/32
C	1/8—2	1-3/16	9/16	5/16	1/16	5/16	5/32
D	1/2—2	1-3/16	9/16	5/16	1/16	5/16	5/32
E	1-1/2—3	1-3/8	5/8	3/8	1/16	11/32	3/16
F	2—4	1-1/2	3/4	1/2	1/16	11/32	1/4
G	2-1/2—4	1-1/2	3/4	1/2	1/16	11/32	1/4
H	4—6	1-1/2	3/4	1/2	1/16	11/32	1/4

[1] Wheels specified for cutting cast iron pipe or thin tubing may vary from the above table dimensions.

TABLE III.—*Rollers for type I, class 1, styles A and B pipe cutters*

Roller designation	Pipe cutter range; nominal pipe size	A Minimum	B Minimum	C Minimum
	Inches	*Inches*	*Inches*	*Inches*
A	1/8—1	7/8	1/4	1/4
B	1/8—1-1/4	7/8	5/8	1/4
C	1/8—2	7/8	3/4	5/16
D	1/2—2	7/8	3/4	5/16
E	1-1/2—3	1-1/8	3/4	5/16
F	2—4	1-1/8	1	3/8
G	2-1/2—4	1-1/8	1	3/8
H	4—6	1-1/8	1	3/8

3.8.7.2 *Style A, three cutter wheels.* Style A pipe cutters shall be furnished with three cutter wheels. The cutter wheels shall conform to table II and shall be similar to figure 2.

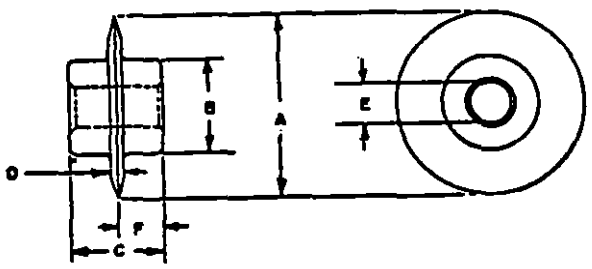


FIGURE 2.—Cutter wheel for type I, class 1, styles A and B pipe cutters.

3.8.7.3 *Style B, one cutter wheel and two rollers.* Style B pipe cutters shall be furnished with one cutter wheel and two rollers. The cutter wheel shall conform to table II and shall be similar to figure 2. The rollers shall conform to table III and shall be similar to figure 3.

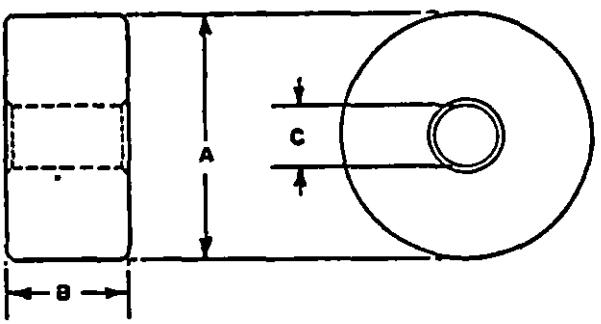


FIGURE 3.—Rollers for type I, class 1, styles A and B pipe cutters.

3.8.8 *Class 2, pivoting feed member.* The feed member shall conform to 3.8.7 except it shall be of the pivoting style and spring-loaded to maintain contact with the feed rod rather than attached to it. Class 2 pipe cutters shall conform to table IV and shall be similar to figure 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

TABLE IV.—*Type I, class 2, styles A and B pipe cutter, pivoting feed member*

Minimum cutting range nominal pipe size		Weight of cutter
Minimum	Maximum	Maximum
Inches	*Inches*	*Pounds*
1/8	1	4
1	2	7-3/4
2	3	14
2-1/2	4	18-1/2
4	6	27

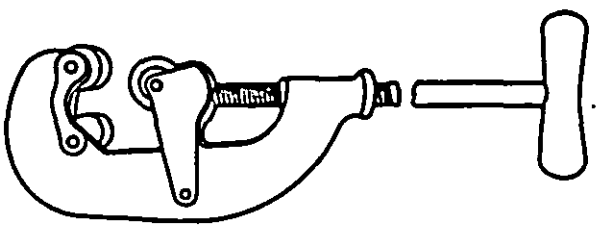


FIGURE 4.—Type I, class 2, styles A and B pipe cutters, pivoting feed member.

3.8.8.1 *Replaceable cutter wheels and rollers for type I, class 2.* When replaceable cutter wheels and rollers for type I, class 2 pipe cutters are required, they shall be ordered in accordance with 6.1.1, as they are not required to conform to tables II and III.

3.8.8.2 *Style A, three cutter wheels.* Style A pipe cutters shall be furnished with three cutter wheels.

3.8.8.3 *Style B, one cutter wheel and two rollers.* Style B pipe cutters shall be furnished with one cutter wheel and two rollers.

3.9 Type II, tube cutter. Type II tube cutters shall consist essentially of a frame, feed mechanism, cutter wheel, two rollers, three pins, and a deburring tool for cutters of 1-3/8 inch maximum capacity or less.

3.9.1 *Frame.* The frame shall be metal of sufficient strength to prevent permanent deformation in operation under maximum load. The frame shall be finished and fitted to insure proper alignment of cutter wheel and permit a free movement of the feed mechanism under normal operating conditions.

3.9.2 *Cutter wheel.* The cutter wheels shall be alloy steel of a grade suitable for the purpose, hardened and tempered to show a Rockwell C hardness of 55 to 64 at any point on the blade. The cutter wheel shall have hubs of a size to provide adequate bearing surface and proper cutter alignment, and shall be readily replaceable.

3.9.3 *Pins or screws.* The pins or screws shall properly support and permit free rotation of rollers and cutter wheels. The pins or screws shall be of steel hardened and designed to provide for readily replacing of worn or damaged cutter wheels.

3.9.4 *Class 1, enclosed feed mechanism.*

3.9.4.1 *Feed mechanism.* The feed mechanism shall be enclosed to prevent damage to threads, entrance of abrasive particles, and substantially confine the lubricating medium. A substantial, suitably shaped handle shall be provided for feeding the wheel cutter. The mechanism shall provide a positive means of maintaining feed adjustment with no binding or cramping. At the option of the manufacturer, the feed mechanism may be provided with a means for quick adjustment.

3.9.4.2 *Rollers.* Rollers shall be of steel and shall be properly hardened. They shall be designed to permit free rotation on supporting pins or screws, prevent scratching or scoring of the tubing, and provide proper alignment of tubing during cutting operations. If specified in the contract or order, the roller shall have flare cut-off grooves, or shall be made in such a manner as to permit the removal of a flare or a bead near its base to conserve tubing.

3.9.4.3 *Deburring tool.* The deburring tool shall be of steel and hardened to 50 to 58 Rockwell reading on the C scale. The deburring tool shall be easily replaceable; sharpened on at least one edge; retractable; shall lock in the working position; and shall be capable of deburring all sizes of tube within the range of the cutter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.9.4.4 Type II, class 1 cutters shall conform to table V and shall be similar to figure 5.

TABLE V.—*Type II, class 1, tube cutter, enclosed feed mechanism*

Minimum cutting range (tube O.D.)	Weight of cutter, Maximum	Overall length in fully opened position, Maximum
Inches	*Ounces*	*Inches*
1/8— 3/4	6	3-1/2
1/8—1-1/8	10	6
1/4—1-3/8	11	6
1/4—2-3/8	32	11
3/8—2-5/8	35	11
2—4-1/8	48	15

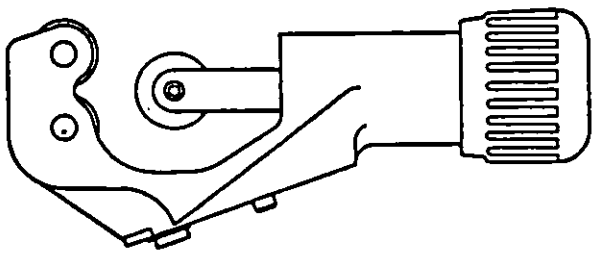


FIGURE 5.—Type II, class 1 tube cutter, enclosed feed mechanism.

3.9.4.5 Except for the 1/8 to 3/4 inch capacity cutter, each type II, class 1 cutter of 1 3/8 inch capacity or less shall include a spare cutter wheel. This spare wheel shall be securely attached to the cutter in a manner which will not interfere with the proper operation of the cutter and shall be readily accessible to provide for fast replacement purposes. It shall be adequately shielded against damage under normal service conditions.

3.9.4.6 Cutters of at least 2 3/8-inch capacity shall have four rollers, five screws or pins, deburring tool conforming to 3.9.4.3 and a spare cutter wheel. Tool shall be designed so that cutter wheel will not strike hardened rollers at any time.

3.9.4.7 Cutters of at least 4 1/8-inch capacity shall be in accordance with 3.9, except that a spare cutter wheel shall be securely attached to the cutter and shall be readily accessible to provide for fast replacement purposes. It shall be shielded against damage under normal service conditions. A deburring tool is not required for this size cutter.

3.9.4.8 Cutters of 1/8-inch to 3/4-inch capacity shall be in accordance with 3.9 except that the rollers shall be optional with the manufacturers. When rollers are not used, the cutter frame shall be designed with a "V" groove to contain the tubing during cutting operations. A deburring tool is not required for this size cutter.

3.9.5 *Class 2, sliding feed member.*

3.9.5.1 *Feed mechanism.* The feed mechanism shall be of the sliding style with a positive means of maintaining feed adjustment with no binding or cramping and shall not become detached from the feed rod. A handle of suitable material, affording a comfortable grip, shall be integral with or securely fixed to the outer end of the feed rod.

3.9.5.2 *Rollers.* Rollers shall be of steel and properly hardened. They shall be designed to permit free rotation on supporting screws or pins, prevent scratching or scoring of the tubing, and provide proper alignment of the tubing during cutting operations.

3.9.5.3 *Deburring tool.* When specified on cutters up to 2 1/8-inch capacity (see 6.1), a deburring tool, conforming to 3.9.4.3, shall be furnished.

3.9.5.4 Type II, class 2 cutters shall conform to table VI and shall be similar to figure 6.

TABLE VI.—*Type II, class 2 tube cutter, sliding feed member*

Minimum cutting range (tube O.D.)	Weight of cutter, maximum	Overall length in fully opened position, maximum
Inches	*Ounces*	*Inches*
1/8 —1	13	7
3/16—1-1/8	24	8
5/8 —2-1/8	46	11-1/2
1 —3	50	15
2 —4	70	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

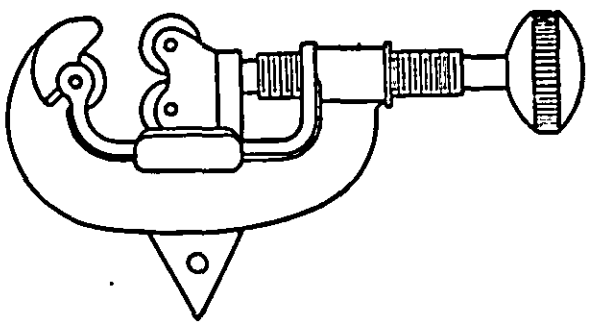


FIGURE 6.—Type II, class 2 tube cutter, sliding feed member.

3.9.6 *Class 3, pivoting feed member.* Class 3 tube cutters shall conform to 3.9.5.1, 3.9.5.2, and 3.9.5.3, except the feed member shall be of the pivoting style and spring-loaded to maintain contact with the feed rod or attached to it.

3.9.6.1 Type II, class 3 cutters shall conform to table VII and shall be similar to figure 7.

TABLE VII.—*Type II, class 3, tube cutter, pivoting feed member*

Minimum cutting range O. D. tube size		Weight of cutter	Overall length in fully opened position
Minimum	Maximum	Maximum	Maximum
Inches	*Inches*	*Ounces*	*Inches*
1/8	1	14	6-1/2
3/16	1-1/2	40	10-1/2
5/8	2-1/8	24	9-1/2
1-1/8	3-1/8	48	12-1/2
1-1/2	4-1/8	52	12-1/2

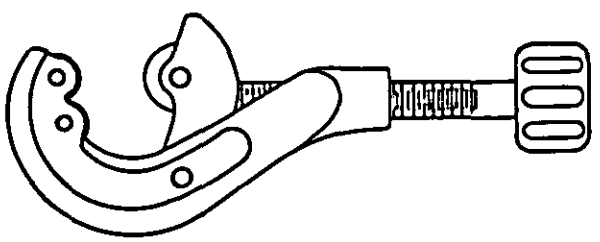


FIGURE 7.—Type II, class 3 tube cutter, pivoting feed member.

3.10 Repair parts. The successful bidders supplying pipe and tube cutters shall make available and furnish repair parts when requested. All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances, in order that such parts may be completely interchangeable, replaced, or adjusted without requiring modification.

3.11 Workmanship. Edges and corners of cutters shall be rounded in conformance with the best commercial practice. Cutters shall have no burrs, fins, sharp projections, excessive surface roughness, or any imperfections which may impair serviceability. Sharp edges will be permissible on deburring tools and cutter wheels only.

4. SAMPLING, INSPECTION, AND TEST PROCEDURE

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards or, if none, in accordance with this specification.

4.2.2 *Intermediate inspection.* Hardness tests shall be performed as specified in 4.4.3, prior to the application of coating, to deter-

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

mine compliance with applicable requirements. Any reading not within specified values shall be classified a defect. A lot shall consist of cutter wheels, rollers, pins, or deburring tools, heat treated as a batch or under the same process and control. The sample unit shall be one cutter wheel, roller, pin, or deburring tool. The inspection level shall be level L4, with an acceptable quality level of 1.5 defects per 100 units.

4.2.3 *Inspection of the end item.* Inspection of the cutters shall be performed as specified in the following paragraphs. A lot shall consist of cutters of the same type, class, and style, including all component parts. The sample unit shall be one completely fabricated and assembled cutter.

4.2.3.1 *Visual examination.* Each sample unit shall be visually examined for the defects set forth in table VIII. The inspection level shall be level II with an acceptable quality level of 4.0 defects per 100 units.

4.2.3.2 *Dimensional examination.* Each sample unit or component shall be examined for dimensions and weight specified in applicable paragraphs and tables. Any deviation therefrom shall constitute a defect. The inspection level shall be level L6, with an acceptable quality level of 4.0 defects per 100 units.

TABLE VIII.—*Classification of defects*

Examine	Defect
Material	Not fabricated of specified material.
Design	Any characteristic not in accordance with specified requirements.
Finish	Protective coating as applicable, missing or not as required, not smooth, uniform, or adherent.
Construction and workmanship ...	Incomplete, parts missing, not fitted and assembled as required; provisions not made to prevent parts becoming detached while in use.
	Frame fails to insure proper support and alignment of cutter wheels and/or rollers (as applicable).
	Feed rod not substantially mounted.
Construction and workmanship (cont'd)	Moving parts bind or are excessively loose.
	Threads nonconforming, crossed, stripped, chipped, or torn.
	Handle or grip not shaped as required, not finished smoothly or not firmly fixed to outer end of feed rod.
	Not free from tool marks or gouges, chipped, ragged, or burred edges.
	Pins, cutter wheels or rollers not easily replaceable or not interchangeable.
	Feed member not sliding or pivoting, not free and smooth acting; not spring loaded when applicable.
	Feed mechanism not enclosed when specified.
	Deburring tool not easily replaceable, not sharpened and retractable or fails to lock in the working position, as applicable.
	Repair parts (when furnished) not interchangeable.
	Cutter not free from burrs, fins, or cracks.
Marking	Manufacturer's name or trademark missing, incorrect, illegible, or not permanent.

4.2.3.3 *Testing.* Each sample unit shall be tested as specified in 4.4.1 and 4.4.2. Any determination not within specified requirements shall constitute a defect. The inspection level shall be level L4, with an acceptable quality level of 4.0 defects per 100 units.

4.3 **Inspection of preparation for delivery.** Unless otherwise specified, inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with MIL-H-15424.

4.4 **Tests.**

4.4.1 *Cutting test.* Sample pipe cutters shall be tested by cutting steel pipe, standard pipe size, of the minimum and maximum prescribed capacity of the cutter. Sample tube cutters shall be tested by cutting mild steel tubing of the minimum and maximum prescribed capacity of the cutter, using tubing with at least 0.060-inch wall

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T12:42Z
Check the source to verify that this is the current version before use.

thickness for the maximum size and at least 0.025-inch wall thickness for the minimum size. Each sample used in this test shall sever at least five pieces of the minimum size and at least five pieces of the maximum size of pipe or tubing. Deburring tools shall be tested by deburring the tubing which is severed with the parent tube cutter.

4.4.2 *Performance examination.* Performance of cutters in the test specified in 4.4.1 shall show no evidence of wear, chipping or dulling of cutting edges of cutter wheels; cramping of adjustable feed member; loosening of handle; binding of feed mechanism; failure of cutter wheels or rollers to rotate freely; misalignment of cutter wheels; excessive pressure required for operation, scoring of roller or cutter wheel supporting pins; cracks, seams or any permanent deformation resulting from test; excessive burrs on pipe or tubing; or difficulty of fitting replaceable parts.

4.4.3 *Hardness test.* The sample units selected in accordance with 4.4.2 shall be subjected to a Rockwell hardness test to determine compliance with requirements of 3.8.4, 3.8.5, 3.8.6, 3.9.2 and 3.9.4.3.

5. PREPARATION FOR DELIVERY

(Civil agencies. Fed. Std. No. 102 should be referred to for definitions and application of the various levels of packaging protection for supplies and equipment.)

5.1 Cleaning, preservation, and packaging.

5.1.1 *Level A.* Level A cleaning, preservation, and packaging shall be in accordance with level A in MIL-H-15424.

5.1.2 *Level C.* Level C cleaning, preservation, and packaging shall be in accordance with the contractor's commercial practice.

5.2 Packing.

5.2.1 *Level A.* Level A packing shall be in accordance with level A in MIL-H-15424.

5.2.2 *Level B.* Level B packing shall be in accordance with level B in MIL-H-15424.

5.2.3 *Level C.* Cutters preserved and packaged in accordance with 5.1.1 and 5.1.2 shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with the rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order (see 6.1), shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military.* In addition to any special marking required by the contract or order (see 6.1), shipping containers shall be marked in accordance with MIL-H-15424.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type and class (and style if applicable) of cutter required (see 1.2.1).

(*c*) Minimum and maximum capacities of cutter required (see tables I, IV, V, VI, and VII).

(*d*) Designation of replaceable cutter wheels and rollers for type I, class 1, styles A and B cutters (see 3.8.7.1).

(*e*) Finish, if other than that ordinarily furnished by the manufacturer (see 3.4).

(*f*) Whether a spare cutter wheel is required for type II, class 1, 1-3/8-inch capacity tube cutters (see 3.9.4.5).

(*g*) Whether a deburring tool is required for type II, classes 2 and 3 tube cutters (see 3.9.5.3 and 3.9.6).

(*h*) Levels of preservation, packaging, and packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:42Z
Check the source to verify that this is the currentversion before use.

6.1.1 When ordering repair parts, specify the following:

(*a*) The manufacturer's name or trademark of pipe or tube cutter for which the parts are required.

(*b*) Name of the component part.

(*c*) Capacity of the parent pipe or tube cutter.

(*d*) Quantity of each item to be procured.

6.2 Transportation description. Transportation description applicable to these items is:

Tools, not otherwise indexed by name.
Carload weight 30,000 pounds.

Mechanic's hand tools, not otherwise indexed.
Truckload weight 30,000 pounds.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—GL

Navy—Ships

Air Force—MAMA

☆ U.S. GOVERNMENT PRINTING OFFICE: 1964—703353/253

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.