GGG-G-00695a(GSA-FSS)
December 8, 1965
SUPERSEDING
Int. Fed. Spec. GGG-G-00695(GSA-FSS)
February 27, 1964

INTERIM FEDERAL SPECIFICATION

GROOVER, SHEET METAL, HAND

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE

1.1 This specification covers the requirements for one type of sheet metal groover used by sheet metal workers for manually setting seams.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:
Fed. Std. No. 102 - Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:
MIL-H-15424 - Hand Tools, Packaging Of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustration. The illustration shown herein is for the convenience of identification, and is not intended to preclude the purchase of groovers which are otherwise in accordance with the requirements of this specification.

3.2 Material. The material used in the manufacture of groovers shall be tool steel, properly heat-treated to produce tools conforming to the requirements specified herein. All groovers shall be of uniform quality, free from burrs, flash marks, or other defects or imperfections that may affect their serviceability and durability. Strength and other physical properties shall be adequate throughout for the purpose intended.

3.3 Design. The design shall be similar to figure 1. The handle portion of the groovers may have either a round or rectangular cross section at the option of the supplier.

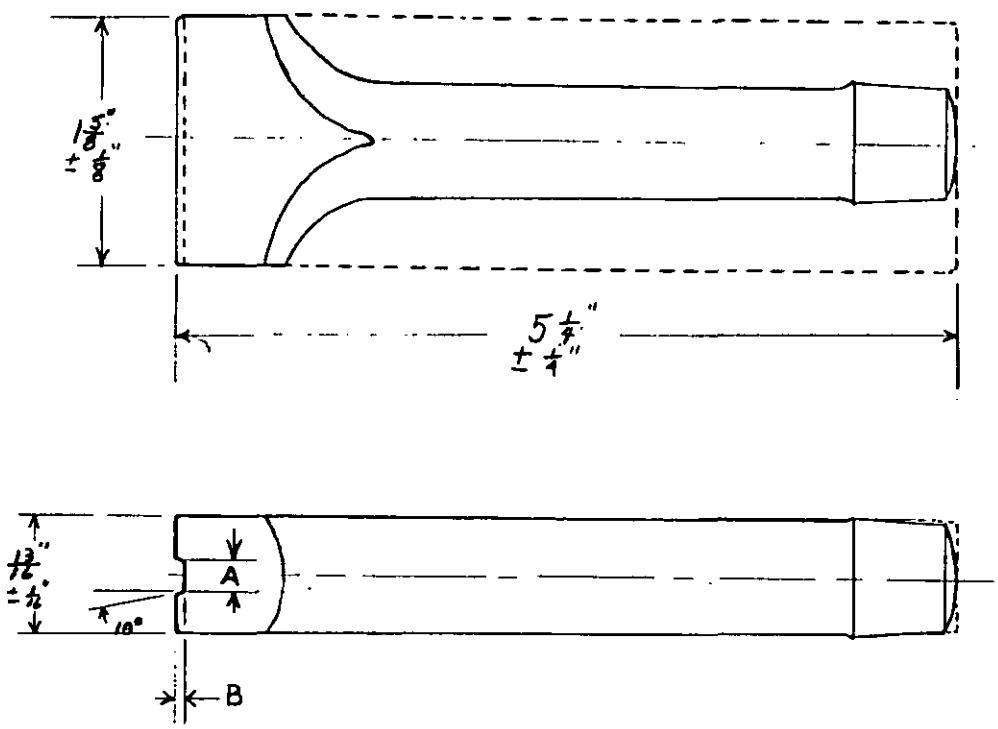


Figure 1. Groover, Sheet Metal, Hand.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.4 Sizes. Sizes shall be as specified in table I (see 6.1).

Table I. Groover sizes

Size	A± 1/64	B± 0.010
	Inches	Inches
00	7/16	0.105
0	3/8	0.105
2	5/16	0.090
4	7/32	0.070

3.5 Hardness. The hardness of the groover shall be not less than Rockwell C 40 nor more than Rockwell C 58.

3.6 Finish. All surfaces of the groover shall be free from burrs, cracks, scale, and other detrimental defects. The groover head shall be finished smooth, and all surfaces shall have a lacquered or suitable coating to prevent rust.

3.7 Identification. The groovers shall be marked in a permanent and legible manner with the specification size number and the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.8 Workmanship. Workmanship shall be in accordance with high grade industrial practice.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table II.

Table II. Sampling Data

Category	Sample Unit	Inspection Level	Acceptable Quality Level	AQL Expressed In Terms Of	Reference
Visual Examination	1 ea.	II	6.5	Defects per hundred units	4.3.1
Dimensional Examination	1 ea.	S-4	1.5	Defects per hundred units	4.3.2
Testing	1 ea.	S-2	1.0	Percent Defective	4.4.1
Preparation for Delivery	One container	S-2	4.0	Defects per hundred units	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, workmanship, and marking.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 Hardness test. Groovers shall be tested for Rockwell C hardness in accordance with Method 243 of Fed. Std. No. 151.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Table III. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102).

5.1 Packaging. Packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. Level A packaging shall be in accordance with MIL-H-15424.

5.1.2 Level C. Preservation and packaging which will afford adequate protection against corrosion, deterioration, and damage during shipment from supply source to the first receiving activity for immediate use. (Vendor to user).

5.2 Packing. Packing shall be A, B, or C as specified (see 6.1).

5.2.1 Level A or B. Level A or B packing shall be in accordance with MIL-H-15424.

5.2.2 Level C. Packing which will afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size of groover required (see 3.4).
(c) Level of packing and packaging required (see 5.1 and 5.2).
(d) Any special marking required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.