GGG-G-770B
May 9, 1973
SUPERSEDING
Fed. Spec. GGG-G-770a
July 29, 1958

FEDERAL SPECIFICATION

GUN, AIR BLOW, (BLAST CLEANING)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers air blow guns for air blast cleaning.

1.2 Classification.

1.2.1 Types, classes, and styles. The air blow guns shall be of the following types, classes, and styles as specified (see 6.2):

Type I - Lever action.
  Class 1 - Lever, over.
    Style A - With hanger.
    Style B - Without hanger.

  Class 2 - Lever, under.
    Style A - With hanger.
    Style B - Without hanger.

Type II - Pushbutton action.
  Class 1 - Button, over.
    Style A - With hanger.
    Style B - Without hanger.

  Class 2 - Button, under
    Style A - With hanger.
    Style B - Without hanger.

  Class 3 - Pistol grip.
    Style A - With hanger.
    Style B - Without hanger.

1.2.2 Sizes. Sizes of guns shall be as specified (see 3.5.1 and 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-665 - Boxes, Paperboard, Metal Stayed (Including Stay Material).

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies.)
Fed. Std. No. 595 - Colors.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-P-116 - Preservation, Methods of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109 - Inspection Terms and Definitions.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking Of U. S. Military Property.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 S. Riverside Plaza, Chicago, IL 60606.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

National Bureau of Standards (NBS) Handbook:

H28 - Screw-Thread Standard for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are descriptive, not restrictive, and are not intended to preclude the purchase of guns which conform in other respects to the requirements of this specification.

3.2 First article. When specified (see 6.2), the contractor shall furnish an air blow gun for first article inspection and approval (see 4.2.1 and 6.2).

3.3 Standard product. Except as otherwise specified herein, the air blow gun and its component parts shall be a standard product of the manufacturer or his suppliers. The items furnished shall be new and unused.

3.4 Material. Material shall be as specified herein. Material not definitely specified shall be of the quality normally used in commercial practice. All material shall be modern in design and shall not have been in prior service except as required by factory tests. Items performing the same functions shall be products of the same manufacturer.

3.5 Construction. Each air blow gun shall consist essentially of a body, a control valve, and a nozzle tip having an orifice air outlet opening not to exceed 5/32-inch. The gun, or tip, as applicable, shall provide automatic

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T12:42Z
Check the source to verify that this is the current version before use.

regulation of air to less than 30 p.s.i. in the nozzle chamber when supplied with a maximum upstream pressure not to exceed 150 p.s.i. Excluding tips that provide for regulation, such as an aspirator type nozzle, or nozzle extensions, as applicable, all nozzles shall be detachable. The control valve shall deliver air in short blasts or in a continuous flow, at the option of the operator with a minimum of applied pressure. The gun shall be easily operated with one hand, and shall seal completely against the air flow at all operating pressures. Each gun, for protection of the operator against chip fly-back, shall be supplied with a nozzle having air holes near the tip capable of providing an air cone barrier around the main air stream, or shall be provided with a flexible, shatter-proof transparent see-through chip guard attached near the tip, unless one of these protective measures is definitely specified (see 6.2).

3.5.1 Sizes. The air inlets of the guns shall be of the following American Standard taper pipe threat (NPT) or straight pipe thread (NPS) sizes, as specified:

1/4 inch - 18 NPT (internal thread)
3/8 inch - 18 NPT (internal thread)
1/4 inch - 18 NPS (external thread)

3.5.2 Type I, lever action guns.

3.5.2.1 Class 1 (lever over), style A (with hanger). Class 1 (lever over), style A guns (with hanger) shall be similar to figure 1. A hook, or opening in the casting, shall be provided to hang the gun when not in use.

3.5.2.2 Class 1 (lever over), style B (without hanger). Class 1 (lever over), style B guns (without hangers) shall be similar to figure 1, except that no hook or opening in the casting is provided for hanging of the gun.

3.5.2.3 Class 2 (lever under), style A (with hanger). Class 2 (lever under), style A (with hanger) shall be similar to figure 2, except that a hook or opening in the casting or lever shall be provided for hanging of the gun.

3.5.2.4 Class 2 (lever under), style B (without hanger). Class 2 (lever under), style B (without hanger) shall be similar to figure 2.

3.5.3 Type II, pushbutton action guns.

3.5.3.1 Class 1 (button over), style A (with hanger). Class 1 (button over), style A (with hanger) shall be similar to figure 3, except that a hook or opening in the casting shall be provided.

3.5.3.2 Class 1 (button over), style B (without hanger). Class 1 (button over), style B (without hanger) shall be similar to figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.5.3.3 Class 2 (button under), style A (with hanger). Class 2 (button under), style A (with hanger) shall be similar to figure 4.

3.5.3.4 Class 2 (button under) style B (without hanger). Class 2 (button under), style B (without hanger) shall be similar to figure 4, except no hook shall be furnished.

3.5.3.5 Class 3 (pistol grip), style A (with hanger). Class 3 (pistol grip), style A (with hanger) shall be similar to figure 5.

3.5.3.6 Class 3 (pistol grip), style B (without hanger). Class 3 (pistol grip), style B (without hanger) shall be similar to figure 5, less hanger.

3.5.4 Leader hose. When specified (see 6.2), the air gun shall be equipped with a 2-foot leader hose of the same diameter as the air inlet sizes (see 3.5.1) One end of the hose shall be equipped with a threaded coupling for connection to the air gun. The intake end of the hose shall be equipped with a quick-connect type hose coupling.

3.6 Interchangeability. All air guns of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.6.1 Threads. Screw threads for all threads securing or attaching devices and threaded parts shall be in conformance with NBS H28 as follows:

a. Machine threads shall be the standard national coarse or fine thread series.

b. Pipe threads shall be the standard national taper pipe thread series.

3.7 Treatment and painting. Unless otherwise specified (see 6.2), the air blow guns shall be treated and painted bright safety yellow in accordance with the manufacturer's best standard practice. When specified (see 6.2), for Air Force procurement, its color shall be in accordance with Fed. Std. No. 595, color number 13538.

3.8 Identification marking. Guns shall be marked for identification in accordance with MIL-STD-130. The nomenclature shall be GUN, AIR BLOW. When specified (see 6.2), the marking shall include the Federal Stock Number.

3.9 Workmanship. The quality of workmanship shall be such as to produce air blow guns that are in accordance with the requirements of this specification and are so constructed as to insure proper functioning of all parts of the unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, examined, and tested to the extent specified, in accordance with the requirements of referenced subsidiary specifications and standards. The terms and definitions of MIL-STD-109 shall apply.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. First article inspection shall be performed on one air gun when a first article sample is required (see 3.2). This inspection shall include the examination of 4.5 and the tests of 4.6. The first article shall be a sample unit produced prior to initiation of the production run. Failure of the first article to pass the examination or any of the tests shall be cause for rejection.

4.2.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.5 and the tests of 4.6.

4.3 Inspection lot. All units of the same size, type, class, and style offered to the Government at one time, shall be considered a lot for purposes of inspection. The sample unit shall be one complete gun.

4.4 Sampling.

4.4.1 Sampling for examination. A random sample of guns shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level II. In terms of defects per 100 units, the acceptable quality level shall be 1.5 for major defects and 4.0 for minor defects.

4.4.2 Sampling for tests. A random sample of guns shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level S-4. In terms of defects per 100 units, the acceptable quality level shall be 1.5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

4.5 Examination. Each unit of the sample shall be examined to verify compliance with this specification. Examination shall be conducted for the defects listed in table I.

4.6 Tests. Each gun of the sample shall be tested, and any unit failing to pass the following tests, as applicable, shall be rejected. A certificate of compliance from an independent laboratory, approved by the contracting officer, will be accepted as evidence that the unit has passed the required tests. Tests shall be conducted as outlined in the referenced documents as herein specified.

TABLE I. Classification of defects

Categories	Defects
Critical:	None defined.
Major:	
101	Gun not of specified type, class, and style (see 1.2.1).
102	Size and thread of gun not as specified (see 1.2.2 and 3.5.1).
103	Nozzle tip attachment not as required (see 3.5).
104	Air outlet orifice larger than 1/8 inch (see 3.5).
105	Gun does not provide automatic regulation of air in the range of 0 - 30 p.s.i. (see 3.5).
106	Gun does not provide short blasts and continuous flow of air at the option of the operator (see 3.5).
107	Gun requires two-handed operation, or excessive pressure to operate (see 3.5).
108	Gun does not seal off all air flow when subjected to pressures up to 100 p.s.i. (see 3.5).
109	Guns not as required for operator protection against chip fly-back (see 3.5).
110	Leader hose not as specified or quick-connect couplings not furnished (see 3.5.4).
111	Guns not identical to permit interchangeability (see 3.6).
112	Workmanship not as required (see 3.11).
Minor:	
201	Guns not painted safety yellow (see 3.7).
202	Identification marking not in accordance with MIL-STD-130 (see 3.8).

4.6.1 Leakproof test. Each gun tested shall be submerged in water and subjected to 100 p.s.i. pressure. No air leakage shall be evident.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

4.6.2 Performance. Each gun tested shall deliver air in the range of 0 - 30 p.s.i. in quick bursts or continuous flow, at the discretion of the operator. Dynamic pressure of the gun, at the outlet orifice, shall not exceed 30 p.s.i.g. with valve fully opened. Also, at a regulated inlet pressure of 100 p.s.i.g. the gun should have a minimum air flow capacity of 10 cubic feet per minute.

4.7 Inspection of preparation for delivery. Preservation, packaging, packing, and marking of the air guns shall be inspected to determine conformance with applicable requirements of section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. The air guns shall be preserved and packaged in accordance with method III of MIL-P-116. The unit container shall be a metal stayed or fiberboard box conforming to PPP-B-665, class 2, or PPP-B-636, class weather-resistant W5c.

5.1.2 Level C. The air guns shall be preserved and packaged in accordance with the supplier's standard practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. The packaged air guns shall be packed in plywood boxes conforming to PPP-B-601, overseas type.

5.2.2 Level B. The packaged air guns shall be packed in fiberboard boxes or plywood boxes conforming to PPP-B-636, class domestic, or PPP-B-601, domestic type.

5.2.3 Level C. The air guns shall be packed in a manner which will insure arrival at destination in satisfactory condition and be acceptable to the carrier at lowest rates. Containers and packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129, as applicable (see 6.2).

6. NOTES

6.1 Intended use. The air blow guns covered by this specification are intended for use in shop areas to remove chips, dirt, and other waste material from machines, work pieces, or benches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.

(b) Type, class, and style of gun required (see 1.2.1).

(c) Size of gun required (see 1.2.2 and 3.5.1).

(d) When a first article is required (see 3.2).

(e) When a leader hose is required (see 3.5.4).

(f) When a specific chip fly-back protection is required (see 3.5).

(g) When treatment and painting shall be other than manufacturer's best standard practice and when color shall be other than safety yellow (see 3.7).

(h) When the marking shall include the Federal Stock Number (see 3.8).

(i) Level of preservation and packaging and level of packing required (see 5.1 and 5.2).

(j) Method of marking required (see 5.3).

6.3 First article. When a first article is required for Military requirements, it shall be tested and approved under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulation. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations, test, and approval of the first article.

6.4 The guns covered by this specification are in compliance with the requirements of the Occupational Safety and Health Administration (OSHA) as published prior to the date of this document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

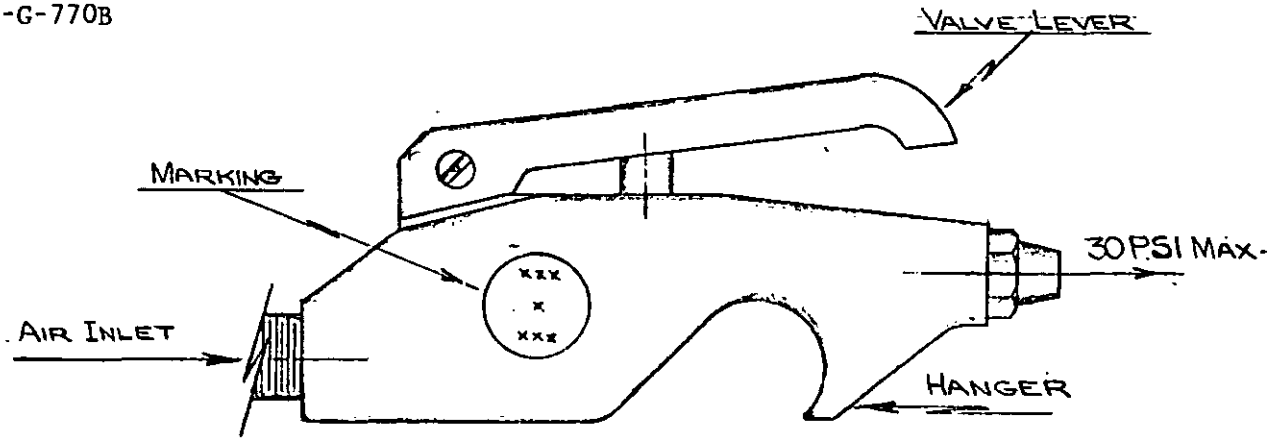


FIGURE 1. TYPE I, CLASS 1, STYLE A, LEVER OVER, WITH HANGER.

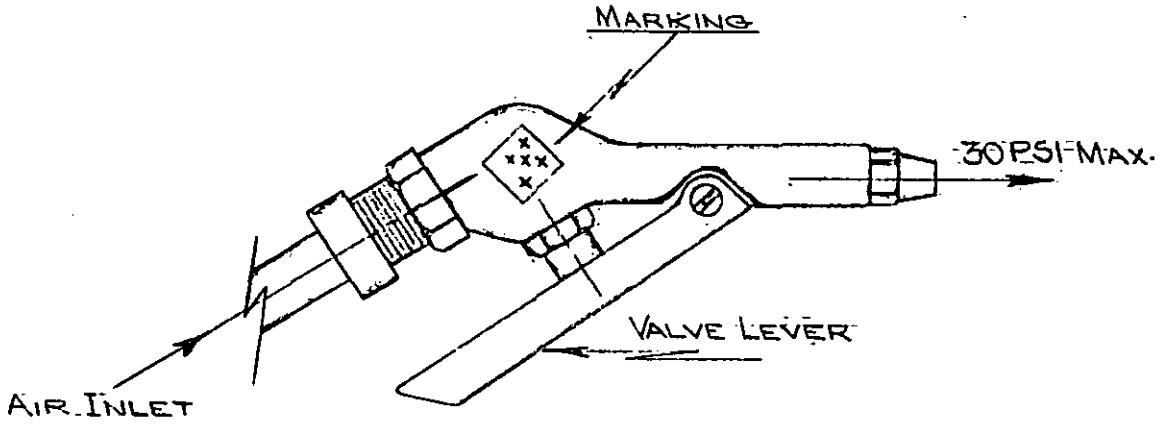


FIGURE 2. TYPE I, CLASS 2, STYLE B, LEVER UNDER, WITHOUT HANGER.

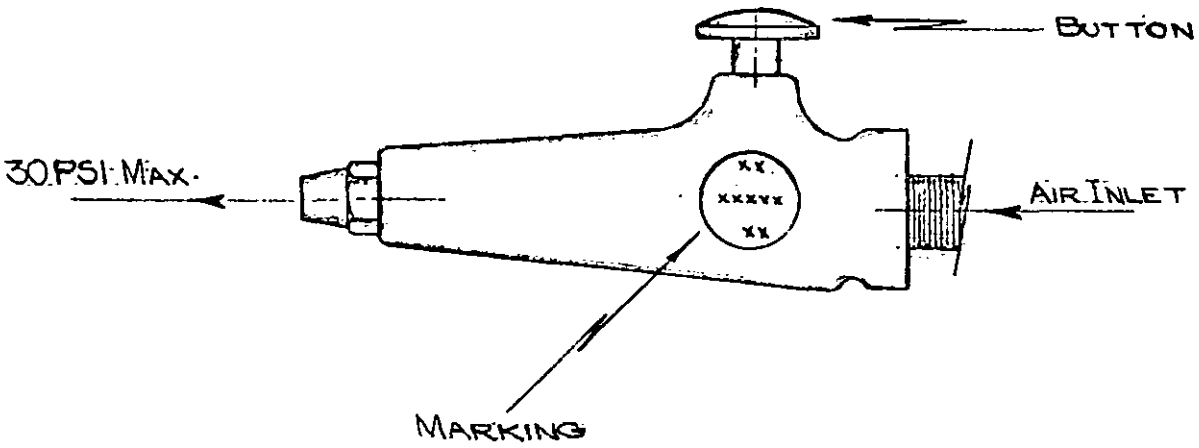


FIGURE 3. TYPE II, CLASS 1, STYLE B, BUTTON OVER, WITHOUT HANGER.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

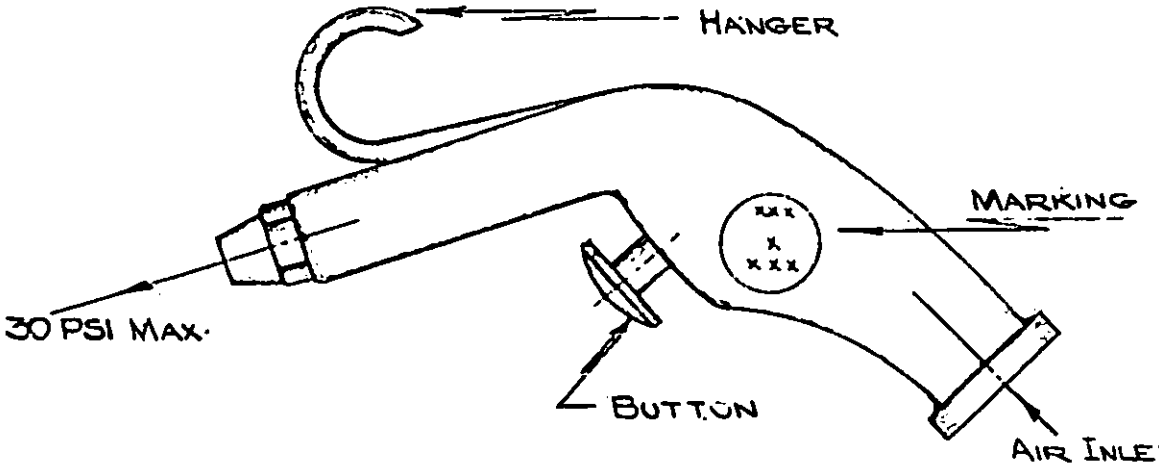


FIGURE 4. TYPE II, CLASS 2, STYLE A, BUTTON UNDER, WITH HANGER.

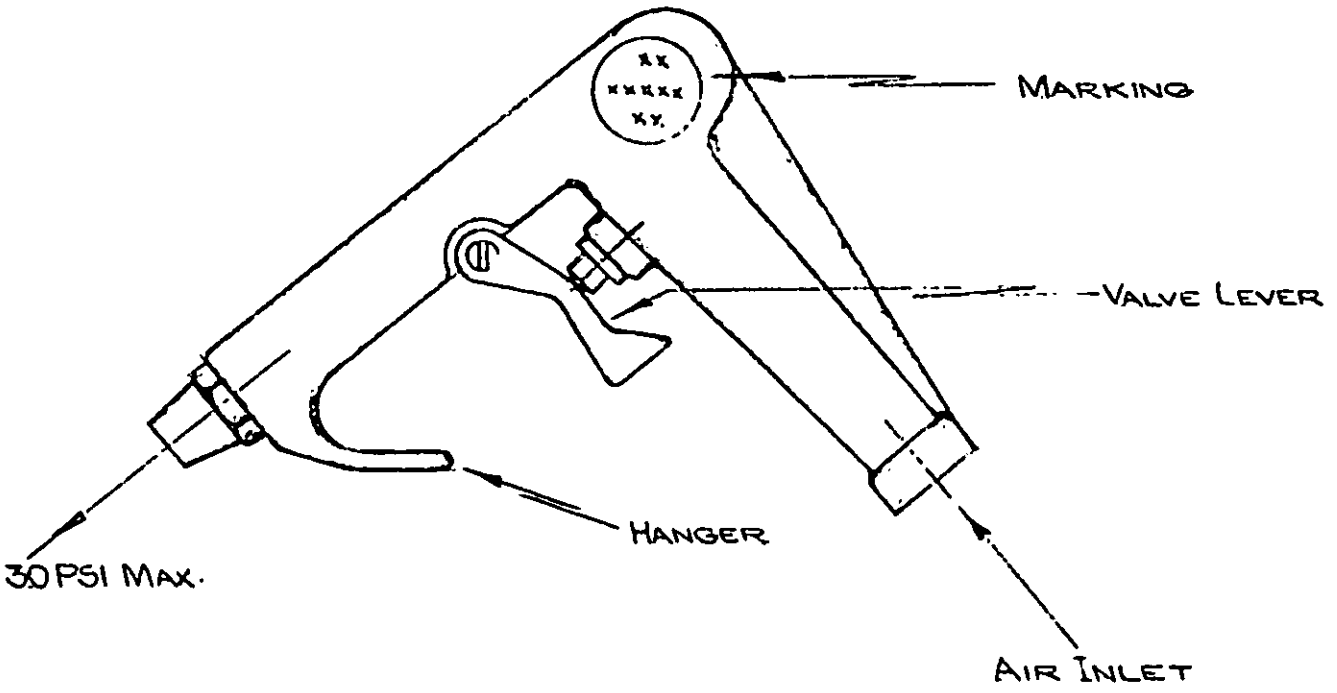


FIGURE 5. TYPE II, CLASS 3, STYLE A, PISTOL GRIP, WITH HANGER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - WC
Navy - YD
Air Force - 82

Review activity:

Navy - SH

User activities:

Navy - AS, MC

Preparing activity:

Navy - YD

Civil Agency Coordinating Activity:

GSA - FSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

FOLD

Commanding Officer
U.S. Naval Construction Battalion Center
Davisville, Rhode Island 02854

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding Officer
U.S. Naval Construction Battalion Center
Code 71
Davisville, Rhode Island 02854

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

GGG-G-770B: Gun, Air Blow (Blast Cleaning)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.