GGG-P-00770a(GSA-FSS)
September 20, 1967
SUPERSEDING
Int. Fed. Spec. GGG-P-00770(GSA-FSS)
May 19, 1964

INTERIM FEDERAL SPECIFICATION

PULLER, FUSE, (S-SHAPE)

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE

1.1 Scope. The fuse puller covered by this specification is an S-shaped tool for pulling cartridge-type fuses.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposals, form a part of this specification, to the extent specified herein:

Federal Specifications:
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-B-665 - Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676 - Boxes, Setup.

Federal Standard:
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

Military Specifications:
MIL-F-11A8 - Fibre, Vulcanized, Electrical and Mechanical Grades.
MIL-B-43Cl4 - Boxes, Water Resistant Paperboard, Folding, Setup and Metal-Stayed.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Uniform Freight Classification Rules:

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago, Illinois, 60606.)

National Motor Freight Classification Rules:

(Application for copies should be addressed to the National Classification Board, 1616 P Street, N. W., Washington, D. C., 20036.)

3. REQUIREMENTS

3.1 Illustration. The illustration herein is descriptive and not restrictive and is not intended to preclude the purchase of fuse pullers otherwise in accordance with this specification.

3.2 Material. The fuse puller shall be fabricated of sheet fiber insulation in compliance with MIL-F-11A8, grade CH, form S. After fabrication, the puller shall be impregnated with insoluble resins or otherwise coated or treated to prevent absorption of moisture.

3.3 Design. The fuse puller shall be similar to figure 1. It shall be not less than 3-1/8 inches overall length, and 3/16-inch thick, ± 1/64 inch. The horn end of the puller shall be curved to form a good grip between the thumb and first finger of the user. The opposite end shall be curved and shaped to satisfactorily hook and remove fuses having a diameter range of 1/4 to 13/16 inch. The puller shall not break, bend, or become deformed in performing the intended duty.

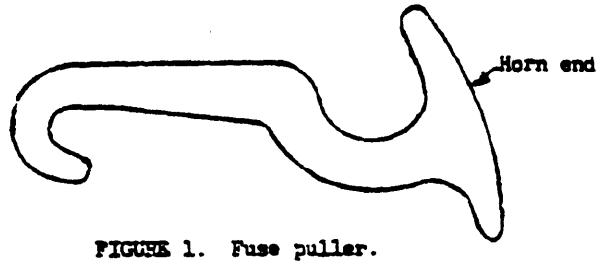


FIGURE 1. Fuse puller.

3.4 Dielectric strength. After immersion for 24 hours in a solution containing 20 percent NaCl by weight, the dielectric strength shall be sufficient to withstand the test voltage specified in 4.3.1 without arc over or visible damage to the puller.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.5 Insulation resistance. The insulation resistance between the point where the fuse is hooked and the closest point thereto where the fingers grip the puller shall be not less than 3 megohms when tested as specified in 4.4.2.

3.6 Identification marking. Each fuse puller shall be permanently marked with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.7 Workmanship. Workmanship shall be first class in every respect.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

TABLE I. Sampling data

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 each	II	2.5	Defects per hundred units	4.3.1
Dimensional examination	1 each	S-3	1.5	Defects per hundred units	4.3.2
Testing	1 each	S-2	2.5	Defects per hundred units	4.4
Inspection of preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking. Defects are listed in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects

Examine	Defects
Material	Not fabricated from material specified.
Finish	Not treated to prevent absorption of moisture.
Design	Not properly shaped for duty to be performed.
Construction and workmanship	Not first class.
Marking	Missing, incorrect, not legible.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 and 4.4.2.

4.4.1 Dielectric strength. After immersion for 24 hours in a solution containing 20 percent NaCl by weight, the fuse puller shall be washed in fresh water and then subjected to 4000-volt a.c. test voltage. This voltage shall be applied for one minute between the point where the fuse is gripped and the closest point thereto where the fingers grip the puller. The requirements of 3.4 shall be met during and after this test.

4.4.2 Insulation resistance. Immediately after the dielectric strength test, the fuse puller shall be tested for insulation resistance. It shall be measured by means of a megohmmeter at a direct current potential of 500 volts. The resistance shall be in accordance with the requirements of 3.5.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table III. For examination of contents, the sample unit shall be one shipping container, fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery.

TABLE III. Classification of preparation for delivery defects

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of container.
Contents	Quantity per container not as specified.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Six pullers shall be packed in a paperboard box conforming to PPP-B-566, variety 2; PPP-B-676, variety 2; or MIL-B-43014, form 3.

5.1.1.1 Intermediate packaging. Twenty unit packages (120 pullers) shall be packed in a fiberboard box conforming to PPP-B-636, class weather-resistant.

5.1.2 Level B. Six pullers shall be packaged in a paperboard box conforming to PPP-B-566, PPP-B-665, or PPP-B-676.

5.1.2.1 Intermediate packaging. Twenty unit packages (120 pullers) shall be intermediate packaged in fiberboard box conforming to PPP-B-636, class domestic,

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Pullers, packaged as specified in 5.1, shall be packed in a wirebound wood, wood-cleated plywood, nailed wood, or fiberboard box conforming to PPP-B-585, class 3; PPP-B-601, overseas type; PPP-B-621, class 2; PPP-B-636, class weather-resistant; or PPP-B-640, class 2.

5.2.2 Level B. Multiples of the intermediate package shall be packed in a fiberboard box conforming to PPP-B-636, class domestic. Gross weight of the shipping container shall not exceed 65 pounds. All boxes shipped to one destination on one order shall be of the same size and contain the same number items.

5.2.3 Level C. The pullers shall be packed to assure carrier acceptance and safe delivery to destination at lowest rates, in containers complying with the Uniform Freight Classification Rules or National Motor Freight Classification, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the unit and intermediate packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to markings required by the contract or order, the unit and intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Levels of preservation, packaging, and packing required (see 5.1).
(c) Special marking, if required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.