GGG-S-00731a(GSA-FSS)
August 3, 1967
INTERIM REVISION OF
Fed. Spec. GGG-S-731
May 31, 1956

INTERIM FEDERAL SPECIFICATION

STAKES, SHEET METALWORKING; AND

PLATE, BENCH STAKEHOLDER

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification GGG-S-731, dated May 31, 1956.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers stakes used by sheet metalworkers for shaping and forming metals, and a bench plate for holding the stakes.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types. Stakes and plate covered by this specification shall be of the following types as specified (see 6.1):

Stakes:
- Type I. - Beakhorn.
- Type II. - Blowhorn.
- Type III. - Bevel-edge square, with offset head.
- Type IV. - Creasing, with horn.
- Type V. - Hatchet.
- Type VI. - Square.
- Type VII. - Round head.
- Type VIII. - Bottom.
- Type IX. - Double-seaming.
- Type X. - Double-seaming, with four interchangeable heads.
- Type XI. - Hollow mandrel.
- Type XII. - Candle mold.
- Type XIV. - Needle case.
- Type XV. - Conductor.
- Type XIV. - Coppersmiths'.

Plate:
- Type XIII. - Bench.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposals, form a part of this specification:

Federal Standards:
- Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies)
- Fed. Std. No. 151 - Metals; Test Methods.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the currentversion before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:
MIL-H-15424 - Hand Tools, Packaging of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-139 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of stakes and plates otherwise conforming to this specification.

3.2 Material and design. The stakes and plates shall be of the material specified herein (see 3.5) for each type. Stakes shall consist of a body and shank. They shall be properly proportioned, and of strength and design suitable for the purpose intended.

3.3 Finish.

3.3.1 Working surfaces. All working surfaces, after machining to true shape, shall be polished, using an abrasive of not less than 100 grit in the final operation.

3.3.2 Other surfaces. All nonworking surfaces shall be smooth. Welded fillets shall be ground smooth. All unpolished surfaces shall be coated with a rust-resistant paint.

3.4 Identification marking. Stakes and plates shall be marked in a plain and permanent manner with the manufacturer's name, or with a trademark of such known character that the source of manufacture may be readily determined.

3.5 Stakes. Unless otherwise specified herein, stakes shall be forged steel, or hot-rolled steel with forged steel shanks. Forged stakes shall be forged integral or fabricated by welding. Shanks shall be square in section at the lower end, and tapered to fit the cored holes in the bench plate. Shanks of all stakes shall be at right angle to the body or head.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:42Z
Check the source to verify that this is the current version before use.

3.6 Type I, beakhorn.

3.6.1 Body. The body shall be provided with two horns, the tops of which shall be level and in the same plane. One horn shall be circular in cross section and shall taper toward the shank at least 7 inches. The bottom side of the circular horn shall taper gradually in a curve from the shank toward the end. The outer end of the circular horn shall be tapered from the bottom to the top surface at a 25° angle from the vertical. The other horn shall be rectangular in cross section with the top surface level. The bottom and sides of the rectangular horn shall be tapered toward the end, and tapered from the bottom to the top surface at a 5° angle. Horns shall be heat treated to show a hardness of 45 to 55 on the Rockwell C scale.

3.6.2 Shank. The shank shall extend from the juncture of the two horns. The shank shall be 1-1/2-inch square (± 1/8 inch) with a 5° taper for a minimum of 4 inches at the lower end of the shank.

3.6.3 The stake shall conform to table I, and be similar to figure 1.

TABLE I. Type I, beakhorn.

Round horn			Flat horn			Shank length Min.	Weight
Length ± 2 1	Diameter at shank ± 1/4	Diameter at end ± 3/16	Length ± 1	Width at shank ± 1/4	Width at end ± 5/16		± 3-1/2
Inches	Inches	Inch	Inches	Inches	Inches	Inches	Pounds
16-1/2	2-3/8	13/16	21-1/2	2-3/8	1-11/16	12	38-1/2

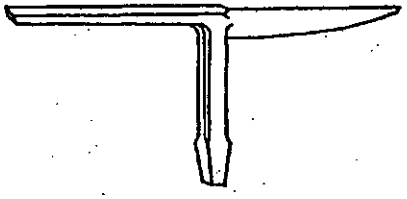


FIGURE 1. Type I, beakhorn.

3.7 Type II, blowhorn.

3.7.1 Body. The body shall be provided with two horns. One horn shall be semicircular in cross section, and the other horn circular in cross section. Both horns shall be tapered from the shanks to the ends.

3.7.2 Shank. The shank shall extend from the juncture of the two horns. Shank size and taper shall be as specified in 3.6.2.

3.7.3 The stake shall conform to table II and shall be similar to figure 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

TABLE II. Type II, blowhorn.

Half round horn			Round horn			Shank length Min.	Weight
Length ± 1/2	Diameter at shank ± 1/4	Diameter at end ± 3/32	Length ± 1	Diameter at shank ± 1/8	Diameter at end ± 1/16		± 1-3/4
Inches	Inches	Inch	Inches	Inches	Inch	Inches	Pounds
9	4-3/4	7/16	18	1-1/2	3/8	10	15-3/4

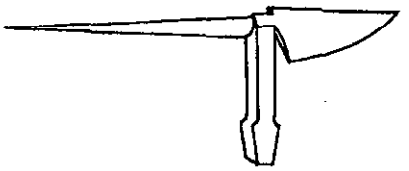


FIGURE 2. Type II, blowhorn.

3.8 Type III, bevel-edge square, with offset head.

3.8.1 Head. The head of the stake shall be rectangular in shape. The two short sides, and front long side, shall be slightly beveled or tapered toward the shank. The working surfaces of the head shall be heat treated to show a hardness of 45 to 55 on the Rockwell C scale.

3.8.2 Shank. The shank shall be offset in two places at an angle of 90°. The offsets shall be in opposite directions 8-1/2 inches apart. Shank dimensions shall be as specified in 3.6.2.

3.8.3 The stake shall conform to table III, and be similar to figure 3.

TABLE III. Type III, bevel-edge square, with offset head.

Face		Weight ± 1-1/2
Width ± 5/16	Length ± 5/16	
Inches	Inches	Pounds
2-11/16	4-3/4	14

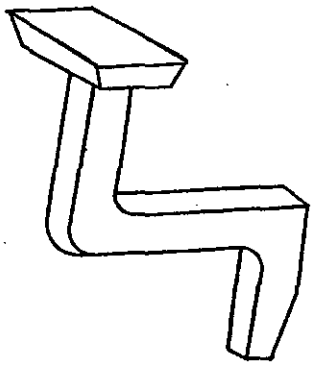


FIGURE 3. Type III, bevel-edge square, with offset head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.9 Type IV, creasing, with horn.

3.9.1 Body. The body shall be provided with two horns, the tops of which shall be level and in the same plane. One horn shall be rectangular in cross section and shall taper in thickness from the shank to the end. The horn end shall taper from the top to the bottom at an angle of 45°, plus or minus 5°, with the vertical. The top of the rectangular horn shall contain six semicircular grooves across the face, ranging in size from 1/16 inch to 11/32 inch in diameter. The smallest groove shall be at the outer end with the grooves increasing in size toward the shank. The other horn of the stake shall be circular in cross section and shall taper in diameter from the shank to the end. The working surfaces of the rectangular horn shall be heat treated to show a hardness of 45 to 55 on the Rockwell C scale.

3.9.2 Shank. The shank shall extend from the juncture of the two horns. The shank shall be in accordance with 3.6.2.

3.9.3 The stakes shall conform to table IV, and be similar to figure 4.

TABLE IV. Type IV, creasing, with horn.

Creasing Horn	Round Horn			Shank Length	Weight
Length ≤ 1/8	Length ≤ 1/4	Diameter at Shank ≤ 1/4	Diameter at End ≤ 1/16	Min.	≤ 1-1/2
Inches	Inches	Inches	Inch	Inches	Pounds
6-3/4	11-3/4	1-1/2	7/16	10	13-1/2

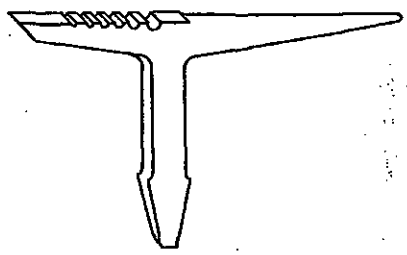


FIGURE 4. Type IV, creasing, with horn.

3.10 Type V, hatchet.

3.10.1 Body. The top of the body shall be beveled to an angle of 45°. The ends of the horns shall be heat treated for a distance of not less than 3 inches back from the ends to show a hardness of 45 to 55 on the Rockwell C scale.

3.10.2 Shank. The shank shall be located equidistant from both ends of the body with one side of the square flush with the flat side of the body that forms an angle of 45° with the top of the body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.10.3 The stake shall conform to table V and be similar to figure 5.

TABLE V. Type V, hatchet.

Length of blade ± 1/2	Shank length Min.	Weight ± 1
Inches	Inches	Pounds
13	9	9-1/2

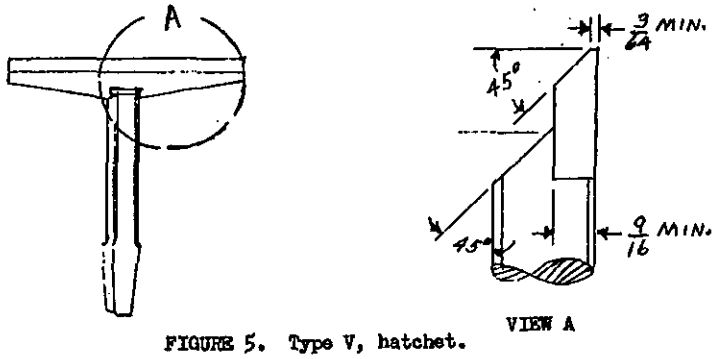


FIGURE 5. Type V, hatchet.

3.11 Type VI, square.

3.11.1 Head. The head shall have a top face rectangular in shape. Ends of head shall be heat treated for a distance of not less than 1 inch back from the end to indicate a hardness of 45 to 55 on the Rockwell C scale. One side of the head shall be beveled toward the shank at an angle of 5°.

3.11.2 Shank. The shank shall extend from the center of the head, and shall be as specified in 3.6.2.

3.11.3 The stake shall conform to table VI, and be similar to figure 6. The sizes shall be as specified (see 6.1).

TABLE VI. Type VI, square.

Width of face ± 5/16	Length of face ± 1/4	Shank length Min.	Weight ± 1
Inches	Inches	Inches	Pounds
2-1/2	4-1/2	12	11
3-1/4	5-1/4	14	14




FIGURE 6. Type VI, square.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.12 Type VII, round head. Stakes shall be of cast iron, and shall consist of a rounded head working surface integral with the shank.

3.12.1 Shank. The upper portion of the shank may be round or square with a minimum diameter of 1-1/2 inches. The lower portion shall be square with a 5° taper for a minimum of 3-1/2 inches at the lower end of the shank.

3.12.2 The stake shall conform to table VII, and shall be similar to figure 7.

TABLE VII. Type VII, round head.

Diameter of head ± 5/16	Shank length Min.	Weight ± 1
Inches	Inches	Pounds
3-1/16	10	9-1/2



FIGURE 7. Type VII, round head.

3.13 Type VIII, bottom.

3.13.1 Head. The head shall be rectangular in cross section having a rounded top working face with one side straight and the other side tapered and rounded.

3.13.2 Shank. The upper part of the shank shall be rectangular in cross section (1/2 by 3/4 inch, minimum), and the lower end 1-inch square and tapered 5° for a minimum of 2-3/4 inches at lower end of shank. The working surface of the head shall be heat treated to show a hardness of 45 to 55 on the Rockwell C scale.

3.13.3 The stake shall conform to table VIII, and be similar to figure 8.

TABLE VIII. Type VIII, bottom.

Width across top ± 3/16	Thickness at top ± 3/64 - 1/32	Shank length Min.	Weight Min.
Inches	Inch	Inches	Pounds
1-3/16	5/64	10	2

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.



FIGURE 8. Type VIII, bottom.

3.14 Type IX, double-seaming.

3.14.1 Body. The body shall be composed of two horns. The tops of the horns shall lie in the same plane. The end of both horns shall be beveled toward the shank. The end plates of both horns shall be heat treated to show a hardness of 45 to 55 on the Rockwell C scale.

3.14.2 Shank. The shank shall extend from the juncture of the two horns, and dimensions shall be as specified in 3.6.2.

3.14.3 The stake shall conform to table IX, and shall be similar to figure 9.

TABLE IX. Type IX, double-seaming.

Diameter of each horn ± 3/16	Length of longer horn ± 3/4	Length of shorter horn ± 5/8	Shank length Min.	Weight ± 5
Inches	Inches	Inches	Inches	Pounds
1-13/16	17	12-1/8	12	31

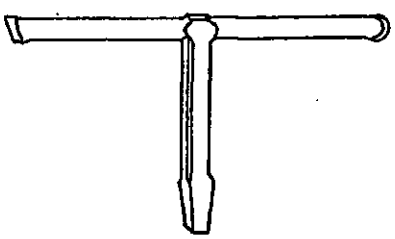


FIGURE 9. Type IX, double-seaming.

3.15 Type X, double-seaming, with four interchangeable heads. Stake shall be of cast iron and shall consist of a body and four detachable heads.

3.15.1 Body. The body shall be square in cross section and provided with two tapered shanks at right angles to each other at one end so that the stake may be used in either a vertical or horizontal position. The body shall have two sockets of the same size at right angles to each other at the other end to receive any one of the four heads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.15.2 Heads. The four interchangeable heads shall be one each of round (one side of head may be cut away to provide flush mounting with end of mandrel); long oval; square; and short oval. Shanks shall be 1-5/8 inches square and 3 inches long. A tolerance of plus or minus 1/64 inch will be permitted.

3.15.3 The stake body and heads shall conform to table X, and be similar to figure 10.

TABLE X. Type X, double-seaming, with four interchangeable heads.

Overall length ± 1/2	Weight ± 25	Round head (A)		Long oval head (B)			
		Height[1] ± 3/16	Diameter ± 1/4	Height[1] ± 3/16	Length ± 3/8	Width at wide end ± 5/16	Width at narrow end ± 1/4
Inches	Pounds	Inches	Inches	Inches	Inches	Inches	Inches
30-1/2	110	4-1/4	6	2-1/2	8-3/8	3	2-1/2

Square head (C)			Short oval head (D)			
Height[1] ± 3/16	Length ± 1/4	Width ± 3/8	Height[1] ± 1/4	Length ± 1/4	Width at wide end ± 5/16	Width at narrow end ± 1/4
Inches	Inches	Inches	Inches	Inches	Inches	Inches
2-1/2	5-1/2	4-1/2	2-5/8	5-3/4	4	3-3/4

[1]Measured from top of head to shank.



FIGURE 10. Type X, double-seaming, with four interchangeable heads.

3.16 Type XI, hollow mandrel. Stakes shall be of cast iron and shall consist of a body and a clamping bolt.

3.16.1 Body. The body shall be provided with two horns. One horn shall have a flat rectangular working surface with beveled sides. The other horn shall be semicircular in cross section. The body shall have a full length T-shaped slot on the underside.

3.16.2 Clamping bolt. A T-head clamping bolt with lever nut shall be provided for fastening the stake to the bench.

3.16.3 The stake shall conform to table XI and shall be similar to figure 11. The size shall be as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

TABLE XI. Type XI, hollow mandrel.

Overall length ± 2	Weight ± 10	Flat horn		Rounded horn	
		Length ± 1-1/4	Width ± 3/8	Length ± 2	Radius ± 1/8
Inches	Pounds	Inches	Inches	Inches	Inches
40	45	9	5-3/4	31	2
60	95	11-1/4	6-7/8	48	2-1/2




FIGURE 11. Type XI, hollow mandrel.

3.17 Type XII, candle mold.

3.17.1 Body. The body shall be provided with two horns, the axis of each to be level and in the same plane. Both horns shall be circular in cross section, and shall be tapered from the shank to the ends.

3.17.2 Shank. The shank shall extend from the juncture of the two horns, and shall be as specified in 3.6.2.

3.17.3 The stakes shall conform to table XII, and be similar to figure 12.

TABLE XII. Type XII, candle mold.

Long horn			Short horn			Shank length	Weight ± 1
Length ± 3/4	Diameter at smallest part ± 1/8	Diameter at largest part ± 1/8	Length ± 1/2	Diameter at smallest part ± 1/16	Diameter at largest part ± 3/16	Min.	
Inches	Inches	Inches	Inches	Inches	Inches	Inches	Pounds
18-1/4	1/2	7/8	9-1/2	7/16	1-3/16	8	11-1/2

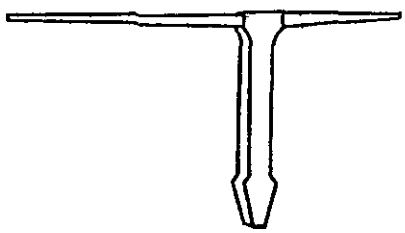


FIGURE 12. Type XII, candle mold.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.18 Type XIV, needle case.

3.18.1 Body. The body shall have two horns with the centerline of the horns level and in the same plane. The long horn shall be cylindrically tapered. The two side surfaces of the short horn shall be parallel and held to within a dimensional range of not more than one inch nor less than 29/32 inch. The top surface of the short horn shall terminate in a radiused outer end. The bottom surface shall taper to a thickness of not less than 1/16 inch nor more than 1/8 inch at the outer end. Adjacent to the shank, the short horn shall have a cross section that is either square or slightly rectangular within a dimensional range of not more than one inch nor less than 29/32 on any side. The bottom surface of the short horn shall be of such shape as normally fabricated by the manufacturer.

3.18.2 Hardness. The short horn shall be hardened on the ends for a distance of not less than 3 inches to show a hardness of 45 to 55 on the Rockwell C scale.

3.18.3 Shank. The shank shall extend from a juncture of the two horns. Shank shall be 7/8-inch square (± 1/8-inch) with 2-3/4-inch long 5° taper on lower end of shank.

3.18.4 The stakes shall conform to table XIII, and be similar to figure 13.

TABLE XIII, Type XIV, needle case.

Length of long horn ± 1/2	Length of short horn ± 1/2	Diameter of long horn largest part ± 1/16	Diameter of long horn at smallest part ± 3/32	Shank length Min.	Weight ± 1
Inches	Inches	Inch	Inch	Inches	Pounds
10-12	8-1/2	5/8	7/16	8	5

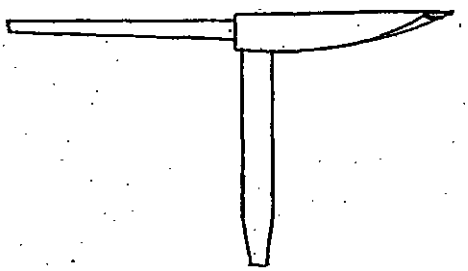


FIGURE 13. Type XIV, needle case.

3.19 Type XV, conductor.

3.19.1 Body. Stake shall consist of two cylindrical horns for forming and seaming pipes or other cylindrical pieces.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

3.19.2 Shank. The shank shall extend from the juncture of the two horns, and dimensions shall be as specified in 3.6.2. The size shall be as specified (see 6.1).

3.19.3 The stake shall conform to table XV, and be similar to figure 14.

TABLE XV. Type XV, conductor.

Long horn		Short horn		Shank length Min.	Weight ± 5
Length ± 1	Diameter ± 1/16	Length ± 1	Diameter ± 1/16		
Inches	Inch	Inches	Inch	Inches	Pounds
15	1-3/4	12	1-1/4	7	22-1/2
20	2	14	1-1/2	10	35




FIGURE 14. Type XV, conductor.

3.20 Type XVI, coppersmiths'.

3.20.1 Head. The head shall be square type with one end rounded. Head shall be heat treated to show a hardness of 44 to 55 on the Rockwell C scale.

3.20.2 Shank. The shank shall extend from the center of the head and shall be as specified in 3.6.2.

3.20.3 The stake shall conform to table XVI, and be similar to figure 15.

TABLE XVI. Type XVI, coppersmiths'.

Width of face ± 1/4	Length of face ± 1/4	Shank length Min.	Weight ± 1
Inches	Inches	Inches	Pounds
2-1/2	4-1/4	10	11



FIGURE 15. Type XVI, coppersmiths'.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.21 Type XIII, bench plate.

3.21.1 Material and design. Bench plate shall be of close grained cast iron and shall be provided with a minimum of 12 smooth cored holes of a variety of sizes and shapes (round, square, and rectangular). Holes shall be tapered to fit stake shanks as specified herein. The top of the plate shall be machined smooth. Holes shall be provided for bolting the plate to a bench. Plate shall conform to table XVII, and be similar to figure 16, or be reinforced with a stiffening rib around the periphery of the bottom of the plate (which would be a slight variation from the illustration).

TABLE XVII. Type XIII, bench plate.

Length		Width	
Min.	Max.	Min.	Max.
Inches	Inches	Inches	Inches
28-3/4	31	7-1/4	8-1/2
35	40	8	12
45	48	8	12




FIGURE 16. Type XIII, bench plate.

3.22 Workmanship. Workmanship shall be of the highest grade and equal in every respect to the best commercial practice. Stakes and plates shall be free from laps, burrs, cracks, and other defects which may impair their serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table XVIII.

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking.

4.3.2 Dimensional and weight examination. Each sample unit shall be examined for any nonconformance with dimensional and weight requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:42Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Sampling data.

Category	Sample	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 Ea.	II	2.5	Defects per 100 units	4.3.1.
Dimensional and weight examination	1 Ea.	II	2.5	do.	4.3.2.
Testing	1 Ea.	S-3	4.0	do.	4.4.1
Preparation for delivery	1 container	S-2	4.0	do.	4.5

4.4.1 Hardness test. Testing shall be accomplished in accordance with Method 243.1 of Fed. Test Method Std. No. 151.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table XIX.

TABLE XIX. Classification of preparation for delivery defects.

Examine	Defects
Marking (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the stakes and benches shall be preserved, packaged and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C, and the level of packing shall be A, B, or C as specified (see 6.1).

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military agencies. In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and size required (see 1.2 and applicable tables).
(c) Selection of levels of preservation, packaging, and packing (see 5.1).

GSA DC 68-1986

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.