INCH-POUND

GGG-S-735/4A
November 8, 1990
SUPERSEDING
GGG-S-735/4
October 5, 1976

FEDERAL SPECIFICATION SHEET

STAMPING AND MARKING EQUIPMENT; RUBBER STAMP, POCKET

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

The complete requirements for procuring the rubber stamps described herein shall consist of this document and the latest issue of GGG-S-735/GEN.

REQUIREMENTS:

Configuration: The stamp shall conform to the requirements specified on figure 1.

Material: The stamp pattern and cushion shall be rubber which shall evidence no less than 15 nor more than 40 percent change in volume when tested for conformance with component and material inspection requirements of the general specification. The pattern and cushion shall be secured to the barrel face in accordance with the manufacturer's standard commercial practice.

The barrel and cap shall be aluminum and cylindrical in shape for the barrel and a high density polyethylene plastic, brass or stainless steel for the cap. The cap shall have a wool felt ink pad furnished without ink. Positive locking means such as threads, spring lock or snap on shall be used to hold the cap on the barrel. The loop for a wrist strap shall be stainless steel or brass, or shall be an integral part of the barrel.


The clip shall be a standard conventional clip, no less than 1-inch long, secured to and fixed in such a position so as to indicate the top of the pattern. The clip shall be made of corrosion-resistant steel or spring steel plated in accordance with the manufacturer's standard practice. The end of the clip shall be set to allow no more than 0.006-inch between the clip and the barrel and shall withstand being flexed 200 times without fracture, breakage or permanent deformation when tested for conformance with the end item requirements of the general specification.

AMSC N/A FSC 7520

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

| SIZE | A (MIN) Inches | B (MIN) Inch | C (MIN) Inch | D (MIN) Inch | E -5% Inch | F (MIN) Inch |
|---|---|---|---|---|---|---|
| 1/- | 1-5/8 | 5/8 | 3/8 | 5/8 | 1/4 | 1/8 |
| 1/2 | 1-5/8 | 5/8 | 3/8 | 5/8 | 1/2 | 1/8 |
| 1 | 2-1/4 | 5/8 | 3/8 | 5/8 | 1 | 1/8 |

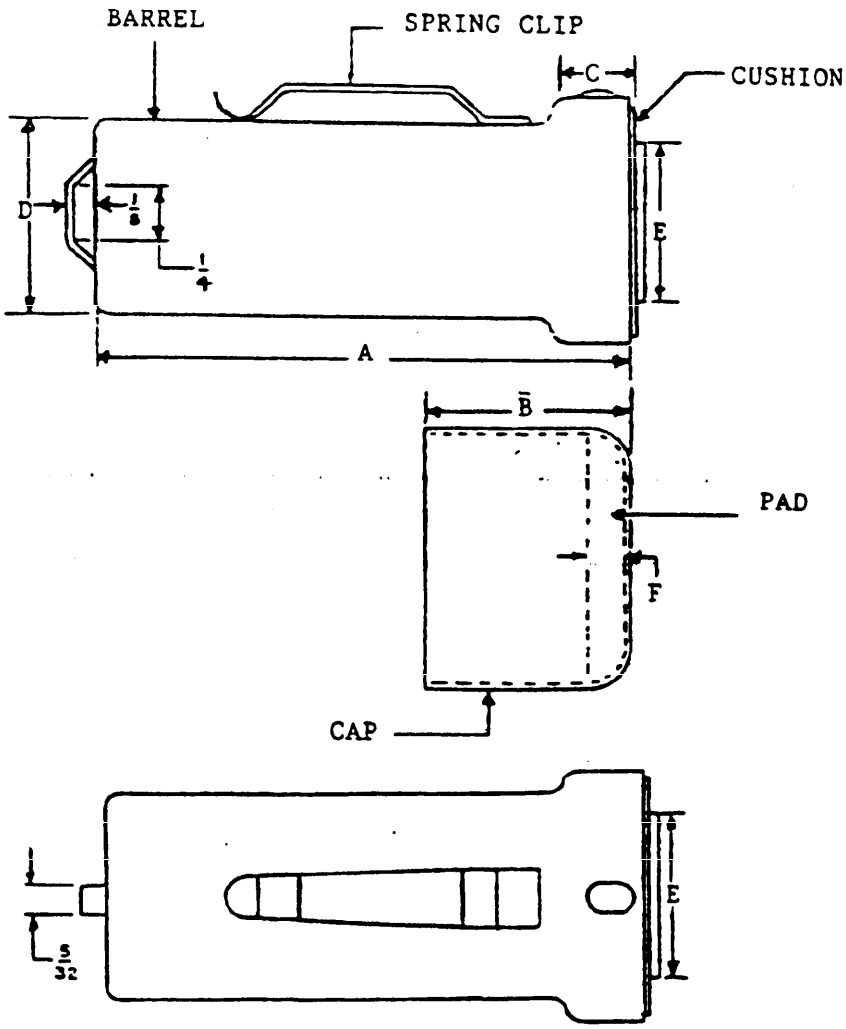


UNLESS OTHERWISE SPECIFIED,
TOLERANCE: ± 1/64

"E" DIMENSION (SEE FIGURE 1 OF GGG-S-735 GEN)

FIGURE 1. RUBBER STAMP, POCKET



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Part Number: GGGS735-4P - Partial Inspection Approval
Part Number: GGGS735-4C - Complete Inspection Approval

Custodians

Army - GL
Navy - SA
Air Force - 99

Review activities

Army - MD
Navy - MS
Air Force - 84
DSA - CS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7520-0186



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.