FEDERAL SPECIFICATION SHEET

STAMPING AND MARKING EQUIPMENT; PRESS, LEAD SEAL, HAND, REVERSIBLE TYPE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the presses described herein shall consist of this document and the issue in effect of Federal Specification GGG-S-735/GEN.

REQUIREMENTS:

Configuration: The press shall conform to the requirements specified on figure 1.


Material: The press die shall be steel with a complete inspection approval pattern on one face and a partial inspection approval pattern on the other. The patterns shall be indented in the faces so as to form a raised impression on the stamped object. The lower die shall be blank.

The press handles shall be malleable iron or steel. The handle and frame portion shall be bright nickel plated. The contact surfaces of the cams shall be covered with tool steel inserts or overlaid with a plate of welded tool steel approximately 1/16-inch thick and ground and polished to a smooth finish to minimize friction. The inserts or welded tool steel shall have a Rockwell "C" hardness of 60 to 64 when tested for conformance to the end item requirements of the general specification. The press handles shall also withstand an 80 pound load without failure when tested for conformance with the end item test requirements of the general specification.

The press shall be designed so that there is at least 3/16-inch space between the upper and lower faces of the dies in the open position. When the jaws and handles are positioned as shown in figure 1, the die faces shall be approximately parallel.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

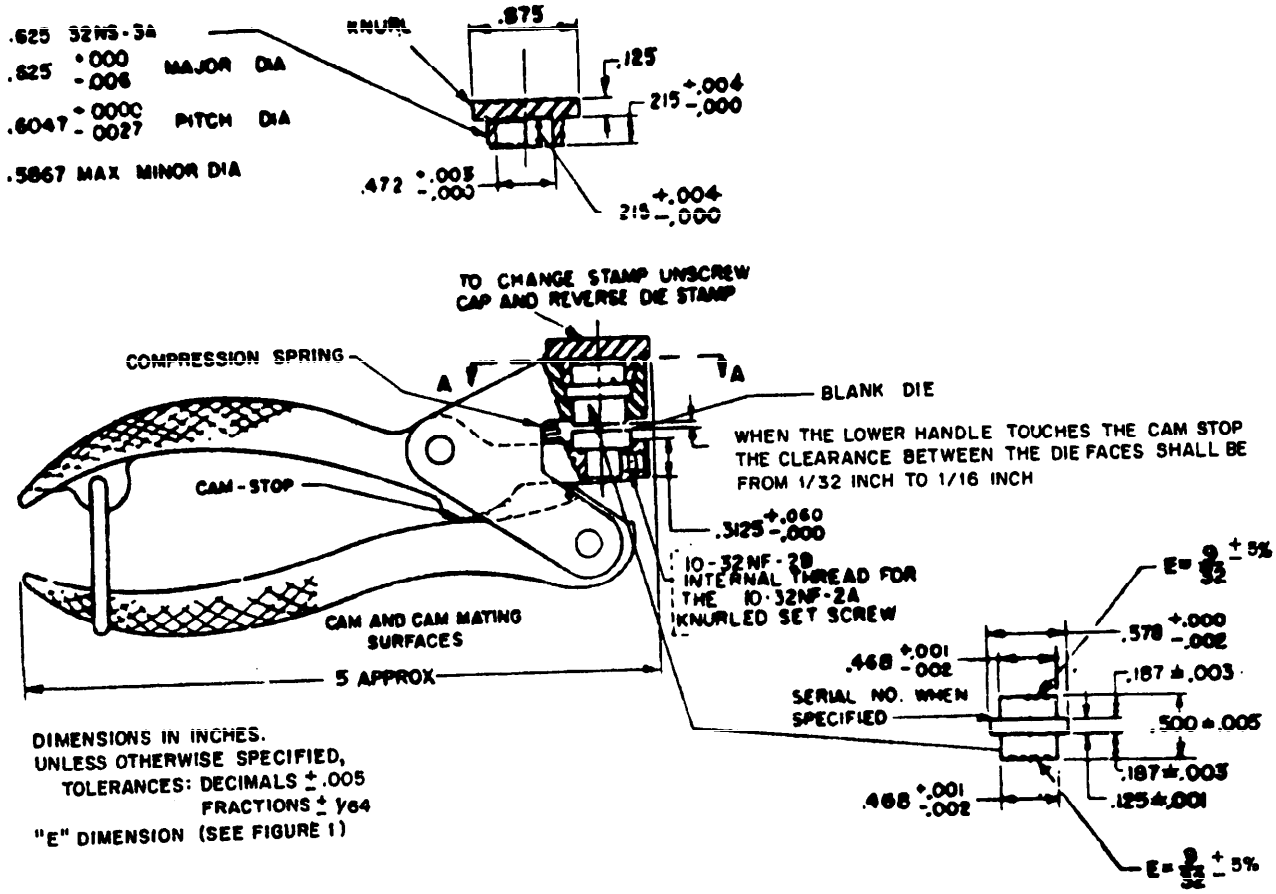

PRESS, LEAD SEAL, HAND, REVERSIBLE TYPE
FIGURE I

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.

Material: (cont'd)

The compression spring shall spread the jaws and handles fully open under no load conditions. The closed length of the spring shall not prohibit the press handles from bringing the die faces together when tested for conformance to the end item test requirements of the general specification.

A satisfactory impression on a lead seal shall be made requiring the application of no more than 60 pounds pressure on the handles when tested for conformance to the end item test requirements of the general specification.

Part Number: GGGS735-7

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activities:

Army - MD
Navy - MS
DSA-CS

Preparing activity:

Army - GL

Civil Agency Coordinating Activity:

GSA-FSS

Project No. 5120-0862-7

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.