GGG-S-740B
November 5, 1987
SUPERSEDING
GGG-S-00740A(GSA-FSS)
July 15, 1965
GGG-S-740
December 18, 1956

FEDERAL SPECIFICATION

STANDS, PIPE VISE; AND VISES AND STANDS, PIPE

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers pipe vise stands generally used in plumbing and construction work for supporting pipe vises when threading, cutting, and bending pipe, conduit or tubing.

1.2 Classification.

1.2.1 Types and composition.

Type III - Three legs, with hinge jaw vise
  Composition A - Steel, malleable iron, or ductile iron (aluminum alloy bases optional in Composition A)

Type IV - Three legs with chain vise
  Composition A - Steel, malleable iron or ductile iron (aluminum alloy bases optional in Composition A)

  Composition B - Aluminum alloy

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:
  GGG-V-415 - Vise, Pipe
  PPP-P-40 - Packaging and Packing of Hand Tools

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions, as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification, other Federal specifications, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston; New York; Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; Los Angeles; San Francisco; and Seattle, WA.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their Agencies.).

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification, and are not intended to preclude the purchase of pipe vise stands which are otherwise in accordance with this specification.

3.2 Material and construction. The stands shall be constructed of material conforming to the requirements specified herein. The strength and other physical properties of the stand shall be able to withstand any harm to the serviceability during maximum usage under ordinary service conditions.

3.3 Legs. Rigid when the stand is in an upright spread position under ordinary working conditions. The bottom or feet of the legs shall be upset square cut, or pointed to prevent the stand from skidding and tilting, or shall be provided with punched or drilled holes for fastening the stand to the floor. The feet may be provided with nonskid insulating pads.

3.4 Base. The base shall be provided with universal slots or holes for mounting and securing a chain or hinge vise on the front horizontal portion or the base may be cast integrally into the vise at the manufacturer's option. The base shall have a pipe rest at the rear to support all sizes of pipe within the capacity of the vise. Also, the stand shall be provided with built-in pipe benders as indicated herein, suitable for bending pipe, conduit, or tubing. When specified, a jack screw for use with a length of pipe against an overhead support for extra rigidity of the stand when used for heavy work shall be provided.

3.5 Shelf or tray. The shelf or tray shall be so spaced to allow storage space for holding oil cans, dope pots, wrenches and other items. The shelf or tray shall be attached to the stand in such a manner as to provide a rigid adjustable support for the stand, when the legs are in a spread position.

3.6 Finish. The finish of the stand shall be free from burrs, cracks or other detrimental defects.

3.6.1 Stands. The stands shall be enameled or coated with a coating in accordance with industry practice.

3.7. Type III. The stand shall be collapsible, with three legs, base, with hinge jaw pipe vise conforming to GGG-V-415. The legs shall be attached to the base in a manner to allow the stand to fold or collapse and not become detached. A chain shall be permanently attached to one leg or by any other means for locking/holding the stand when in a folded or collapsed position. (Collapsible shall be interpreted to mean the legs may be removed from the stand, or folded to facilitate packing and transporting.) Base and vise may be cast integrally. See table I for dimensional requirements and figure 1 for design.

TABLE I, three legs, with hinge jaw vise

Composition	Capacity pipe benders (minimum pipe size)	Overall height of stand and vise ±3-1/2	Capacity of vise (minimum pipe size)
	Inches	Inches	Inches
A	1/2 and 3/4	46-1/2	1/8 to 2-1/2
	1/2 and 1	50-1/2	1/8 to 4-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

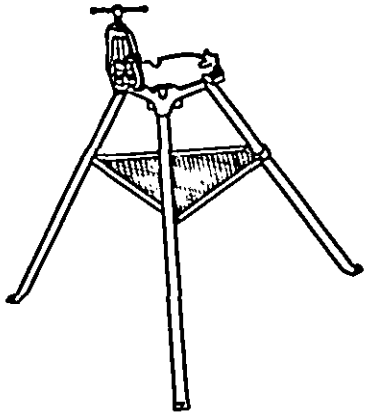


FIGURE 1. TYPE III, three legs, with hinge jaw vise.

3.7.1 Composition A. The stand shall be provided with legs made of either steel or iron pipe having an outside diameter not less than that of a 1-inch minimum standard size pipe. A base shall be provided made of either steel, malleable iron, ductile iron or aluminum alloy.

3.8 Type IV. The stand shall be collapsible with three legs and base with a chain pipe vise conforming to GGG-V-415. The leg shall be attached to the base in a manner to allow the stand to fold or collapse and not become detached. The chain shall be permanently attached to one leg or by any other means used for locking and holding the stand when in a folded or collapsed position. (Collapsible shall be interpreted to mean the legs may be removed from the stand, or folded to facilitate packing and transporting.) Base and vise may be cast integrally. See table II for dimensional requirements and figure 2 for design.

TABLE II. TYPE IV, three legs, with chain vise

Composition	Capacity of pipe benders (minimum pipe size)	Overall height of stand and vise, ± 3-1/2	Capacity of vise (minimum pipe size)
	Inches	Inches	Inches
A	1/2 and 3/4	38	1/8 to 2-1/2
	1/2 and 1	40	1/4 to 4
B	1/2 and 3/4	38	1/8 to 2-1/2
	1/2 and 3/4	40	1/4 to 4

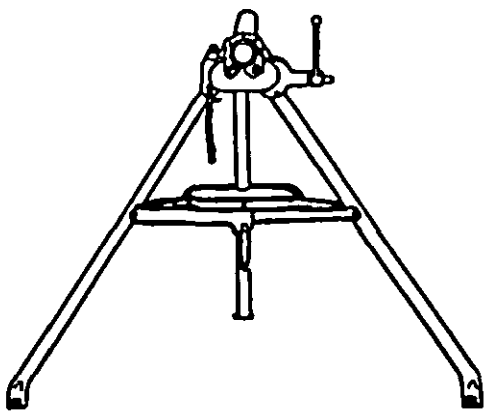


FIGURE 2. TYPE IV, three legs, with chain vise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.8.1 Composition A (shop use). The stand shall be provided with legs of either steel or cast iron pipe having an outside diameter not less than that of a 1-inch minimum standard size pipe. The base shall be made of steel, malleable iron, ductile iron or aluminum alloy.

3.8.2 Composition B (field use). The legs shall be made from aluminum alloy tubing having an outside diameter of not less than 1-5/16 inches nor more than 1-1/2 inches with a minimum wall thickness of 1/8 inch. A base shall be provided made of aluminum alloy.

3.9 Identification marking. The stands shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, part number and country of origin.

3.10 Workmanship. The pipe vise stands shall be free from any defects that would affect appearance, serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that the supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Inspection of the end item (stand only).

4.2.1 Sampling for inspection. Sampling shall be in accordance with MIL-STD-105. The lot size shall consist of all stands offered for acceptance at one time. The sample unit for end item inspection shall be one stand. The sample unit for preparation for delivery inspection shall be one container fully prepared for delivery.

4.3 Inspection of the end item. The stands shall be inspected for design, finish, coating, construction, workmanship, marking and the dimensional requirements as specified herein. The inspection level shall be I with an acceptable quality level of (AQL) of 2.5 percent defective.

4.4 Inspection of the vises. The vises shall be inspected in accordance with section 4 of Federal Specification GGG-V-415.

4.5 Inspection of preparation for delivery. An examination shall be made to determine compliance with the requirements of section 5. Defects shall be scored in accordance with table III. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

TABLE III. Classification of Preparation For Delivery Defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging and packing shall be A or C, as specified (see 6.1).

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Type, composition and capacity of the vise, when applicable (see tables I and II).
(c) Whether jack screw is required (see 3.4).
(d) Level of preservation, packaging, packing required (see 5.1).

MILITARY INTERESTS:

Military Coordinating Activity
Army - GL

Custodians
Army - GL
Navy - SH
Air Force - 99

Review activity
Air Force - 84

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.