UU-C-00250B(GSA-FSS)
April 12, 1971
INTERIM REVISION OF
Fed. Spec. UU-C-250a
December 7, 1965

INTERIM FEDERAL SPECIFICATION

CASE, FILING, TRANSFER, COLLAPSIBLE

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification UU-C-250a, dated December 7, 1965.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers transfer filing cases, of the collapsible, vertical, open-end type, with a telescopic inner binder having a removable lock-arch paper holder with a compressor.

1.2 Classification. The transfer filing cases shall be of one type and the following sizes, as specified (see 3.4 and table I):

Size 1 - Letter size.
Size 2 - Legal size.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified.

Federal Specifications:

PPP-B-636 - Box, Fiberboard.
PPP-B-665 - Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676 - Boxes, Set-Up.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:20Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N. W., Washington, D. C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publication Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Standard product. The transfer filing cases furnished under this specification shall be the manufacturer's standard commercial product, except for changes necessary to comply with the requirements of this specification.

3.2 Material. The material shall conform to the applicable requirements specified herein. Where the material is not definitely defined, it shall be of the quality, and composition best suited for the intended purpose.

3.2.1 Fiberboard. The fiberboard shall conform to PPP-F-320. Corrugated fiberboard shall conform to type CF, flute B or C; class, domestic; variety SW; and grade 200, minimum. Solid fiberboard shall conform to type SF; class domestic; grade 175, minimum.

3.2.2 Steel wire. The steel wire shall be plain carbon steel, and shall be finished as specified in 3.5.

3.2.3 Sheet steel. The sheet steel shall be plain carbon steel, hot or cold rolled, at the option of the manufacturer. The sheet steel shall be finished as specified in 3.5.

3.3 Design and construction. The transfer filing cases shall be made of material as specified in 3.2, 3.3.1 and 3.3.2, and shall be of the dimensions stated in 3.4 and table I. The cases shall conform to the general design illustrated by figure 1. The cases shall consist of a collapsible outer case and a collapsible telescoping inner binder. The inner binder shall be equipped with a removable lock-arch paper holder.

3.3.1 Outer case. The outer case shall be made of corrugated or solid fiberboard conforming to 3.2 and 3.2.1. The inside dimension shall be as specified in 3.4 and table I. The outer case shall be formed into an open-end setup case. The back end of the case shall be designed so that it can be securely fastened by interlocking closure or other means that will pass the test specified in 4.4.2.2. The front or open-end of the case shall be bound with cloth or plastic tape. The sides of the case shall not bend or bulge more than 1/2-inch when subjected to the weight test specified in 4.4.2.1.

3.3.2 Inner binder. The inner binder shall be made of solid fiberboard conforming to 3.2 and 3.2.1. The collapsible inner binder shall be formed into a looseleaf type folder that snugly fits the outer case and completely closes the open-end of the outer case. The flaps of the inner binder shall extend to the full depth and height of the inside of the outer case. The outer corner of the flaps shall be rounded, and the binder shall be equipped with a securely attached metal plate for mounting the removable arch paper holder specified in 3.3.3. The exposed end of the binder shall have a printed full face label with blank spaces for inscribing the nature and date of the material filed, and a metal or leather pull tab to facilitate removing binder from the outer case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

3.3.3 Arch paper holder. The arch paper holder shall be made of material as specified in 3.2, 3.2.2 and 3.2.3, and shall be finished as specified in 3.5. The arch paper holder shall have a metal base with two metal arches attached thereon spaced on 2-3/4 inch centers. Each arch shall have a movable and fixed portion. The movable portion shall be J-shaped wires not less than 1/8-inch in diameter. The fixed portion shall be not less than 3/16-inch in diameter, of tubular construction with tops cut back to receive the ends of the movable arches. The arch paper holder shall be attachable to the metal plate specified in 3.3.2 by a suitable locking device, so it does not become detached under ordinary usage. The fixed portion of the arch shall have a usable filing height of not less than 2-inches.

3.3.3.1 Adjustable metal compressor. Each arch paper holder shall have an adjustable metal compressor designed with a locking device to fit over the fixed arch posts for holding paper in a compact arrangement. The adjustable metal compressor shall be made of material as specified in 3.2, 3.2.2, and 3.2.3, and shall be finished as specified in 3.5.

3.4 Outer case dimensions. The inside dimensions of the outer case shall be as specified in table I. A plus or minus tolerance of 1/4-inch will be permitted.

TABLE I. Inside dimensions of outer case (in inches)

Size	Height	Width	Depth
Letter size	9-1/4	3-1/2	12-5/8
Legal size	9-1/4	3-1/2	15-5/8

3.5 Finish. The metal components shall be plated with nickel, cadium, zinc, or chromium. (See 3.2.2, 3.2.3, and 4.4.)

3.6 Identification marking. Each transfer filing case shall be permanently and legibly marked with the name or trademark of the manufacturer.

3.7 Workmanship. The transfer filing cases shall be free from defects or imprefections which may affect its appearance, or impair its serviceability. It shall be devoid of sharp corners, edges, or other imperfections that may be hazardous to the user.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The government reserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection and testing of materials and components. In accordance with 4.1, the supplier is responsible for insuring that material and components are manufactured, inspected, and tested in accordance with this specification or referenced subsidiary specifications, standards and other documents.

4.2 Sampling.

4.2.1 Size of lot. All cases of one size presented for delivery at one time shall be considered a lot for the purpose of inspection and tests.

4.2.2 Sampling and inspection for acceptance. Sampling and inspection shall be performed in accordance with MIL-STD-105.

4.2.3 Sampling for visual inspection. Random sample of cases shall be taken from each lot in accordance with MIL-STD-105. A sample unit shall be one case. The cases shall be examined for defects listed in table II. The inspection level shall be S-3, and the Acceptable Quality Level (AQL) shall be 4.0 percent defective.

4.2.4 Sampling for plating tests. One sample unit shall be taken from each lot and tested as specified in 4.4.

4.2.5 Sampling for end-item tests. Random sample of cases shall be taken from each lot in accordance with MIL-STD-105. A sample unit shall be one case. The cases shall be tested as specified in 4.4.2. The inspection level shall be S-2, and the AQL shall be 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:20Z
Check the source to verify that this is the current version before use.

4.2.6 Sampling for preparation for delivery. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping container in the end-item inspection lot. The inspection level shall be S-2, and AQL shall be 2.5 defects per hundred units.

4.3 Examination.

4.3.1 Visual and dimensional examination of end-item. Samples taken in accordance with 4.2.3 shall be examined for defects listed in table II. Any case having one or more defects shall be rejected. If the number of defective units in the sample exceeds the acceptance number for that sample, the entire lot represented by the sample shall be rejected.

TABLE II. Classification of defects

Examine	Defects
Material	Not as specified (see 3.2).
Outer Case	Inside dimensions of outer case not as specified (see 1.2, 3.4 and table I). Not collapsible (see 1.1, 3.3 and 3.3.1). No interlocking closure, or other fastening on back end (see 3.3.1). The front, or open end not covered with cloth or plastic tape (see 3.3.1).
Inner Binder	Not collapsible (see 1.1, and 3.3.2). Fits loosely in outer case (see 3.3.2). Does not completely close open-end of outer case (see 3.3.2). Flaps not full depth and height of outer case (see 3.3.2). Outer corners of flaps not rounded (see 3.3.2). No metal plate, or metal plate not securely attached (see 3.3.2). No printed label on exposed end (see 3.3.2). No metal or leather pull (see 3.3.2).
Arch Paper Holder	No arch paper holder (see 3.3.3). Not of the design and construction as specified in 3.3.3. Not attachable to metal plate in binder (see 3.3.3). Does not lock in place when attached to metal plate (see 3.3.3).
Metal Compressor	No metal compressor (see 3.3.3.1). Not of the design and construction as specified in 3.3.3. No locking device on compressor (see 3.3.3.1).
Identification Marking	Missing, incomplete or illegible (see 3.6).
Workmanship	Workmanship not in accordance with paragraph 3.7.

4.3.2 Examination of preparation for delivery. Samples selected in accordance with 4.2.6 shall be examined for defects listed in table III, to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery.

TABLE III. Classification of preparation for delivery defects

Marking: (Unit package and shipping container)	Not in accordance with specification requirements. Omitted, incomplete, incorrect, or illegible. Improper size, location, sequence or method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of preparation for delivery defects (con)

Packaging:	End item not in knockdown condition. Contents not packaged to prevent movement. Box not as specified. Components missing. (NOTE: Not less than three packages shall be randomly selected from each container in the sample size to determine the number of filing cases per package.)
Packing:	Not specified type of shipping container. Container not waterproofed, or flaps not securely sealed with adhesive as applicable. Not strapped as specified, where applicable. Insufficient metal stitching.
Workmanship:	Loose strapping (where applicable). Insufficient strapping or taping. Contortion or bulging of containers. Damaged, bruised, or crushed container.
Contents:	Less than the number of packages per container specified or indicated.

4.4 Tests.

4.4.1 Test for plating. Samples selected in accordance with 4.2.4 shall be subjected to one of the following tests applicable to the finish of the end product. Failure to identify an authorized plating shall be cause for rejection of the entire lot.

4.4.1.1 Identification for presence of nickel. Using a medicine dropper, apply several drops of nitric acid (HNO_3), Sp. gr. 1.42 to the metal surface. At the end of one minute observe acid drop; a clear pale green color indicates presence of nickel.

4.4.1.2 Identification for presence of zinc and cadmium. Place part, or the entire metal component in a beaker of nitric acid (HNO_3), Sp. gr. 1.42. At the end of one minute observe the reaction. A vigorous reaction and no precipitate identifies zinc. A slight reaction and a yellow-colored solution identifies cadmium.

4.4.1.3 Identification for presence of chromium. Using a medicine dropper, apply several drops of concentrated hydrochloric acid (HCl), Sp. gr. 1.18. A green solution identifies presence of chromium.

4.4.2 End item tests. Samples selected in accordance with 4.2.5 shall be subjected to the following tests. Any case failing one or more tests shall be considered defective. If the number of defective units exceeds the acceptance number of the sample, the lot represented by the sample shall be rejected.

4.4.2.1 Weight support test. Remove the inner binder from the outer case and place the outer case on a flat table surface in the usual vertical filing position. Place a 5-pound weight, across the top surface of the outer case. Then place a straightedge to the sides of the outer case and measure the bend or bulge. (See 3.3.1.)

4.4.2.2 Drop test. Fill arch paper holder with paper (8 x 10-1/2 inches) to its minimum capacity (2 inches) and securely lock the compressor. Place the inner binder into the outer case in the usual manner. Locate the compressor. Place the assembled transfer filing case in a vertical filing position on a flat table surface of a height of 30 ± 1 inch, making certain the back end of the case extends over the edge of table. Push the case off the table so that the back end received the full impact of the drop. Examine visually for evidence of loosening of the back and closure, or for any crushed or dented corners that would render the transfer filing case unuseable (see 3.3.1).

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:20Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Twelve transfer filing cases in a knocked down condition shall be packaged in a close-fitting box conforming to PPP-B-636, class weather resistant. Necessary blocking and bracing shall be utilized as required within the box to prevent movement of the contents. Closure of the box shall be in accordance with the appendix to PPP-B-636.

5.1.2 Level B. Twelve transfer filing cases in a knocked down condition shall be packaged in a close-fitting box conforming to PPP-B-665, PPP-B-676, or PPP-B-636, class-domestic, grade 125, minimum. Necessary blocking and bracing shall be utilized as required within the box to prevent movement of the contents. Closure of the box shall be in accordance with the appendix to the applicable box specification.

5.1.3 Level C. Transfer filing cases shall be packaged in a knocked down condition in accordance with the manufacturers standard commercial practice, providing that this will insure protection for the cases during shipment and a safe delivery to their destination.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Thirty-six transfer filing cases (3 unit packages), packaged as specified in 5.1.1, shall be packed in a close-fitting box conforming to PPP-B-363, class weather-resistant, grade V3c or V3s. Each shipping container shall be closed, sealed and strapped in accordance with the appendix to PPP-B-636.

5.5.2 Level B. Thirty-six transfer filing cases (3 unit packages) packaged as specified in 5.1.2, shall be packed in a close-fitting box conforming to PPP-B-636, class-domestic, grade 275 minimum, except that when the unit packages are boxes conforming to PPP-B-636, in which case the shipping box may be in accordance with PPP-B-636, class-domestic, grade 175 minimum. Each shipping container shall be closed in accordance with the appendix to PPP-B-636.

5.2.3 Level C. Transfer filing cases, packaged as specified in 5.1.2 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification or the National Motor Freight Classification.

5.3 Marking. Marking shall be in accordance with paragraph 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special markings required by the contract or order, all interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special markings required by the contract or order, all interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES


6.1 Intended use. The transfer filing cases are intended for storing inactive post-bound documents in a neat, clean, and compact manner. and readily permits reference of documents.

6.2 Ordering Data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Size (see 1.2 and 3.4).
(c) Level of packaging and packing (see 5.1 and 5.2).
(d) Marking required (see 5.3).

GSA DC 71-12372

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:20Z
Check the source to verify that this is the current version before use.

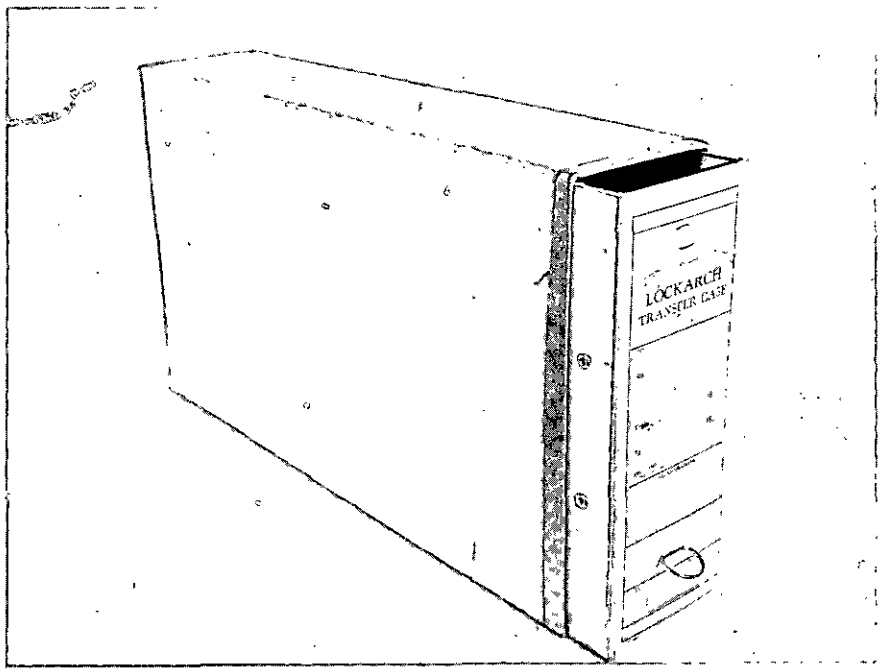

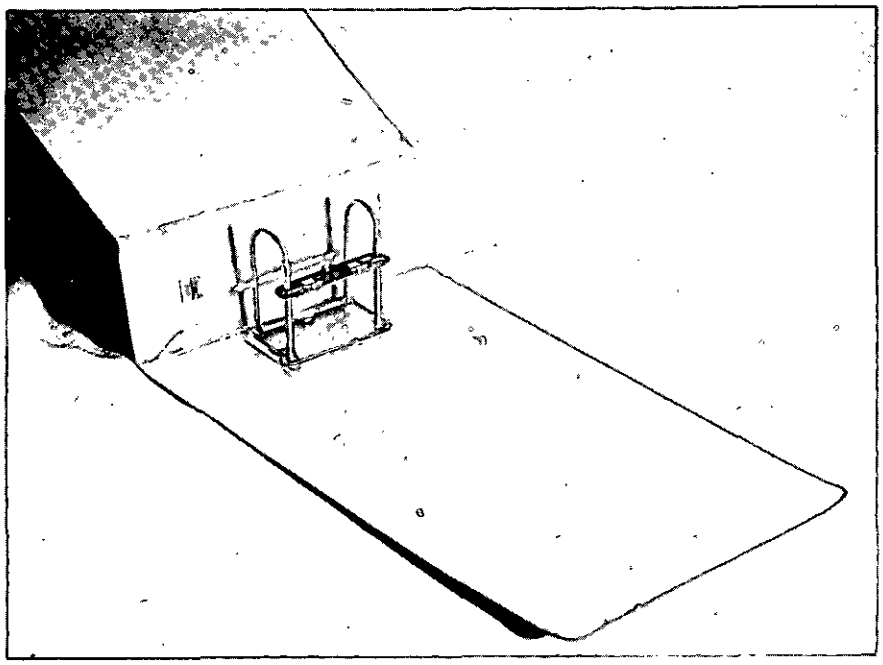


FIGURE 1 - CASE, FILING, TRANSFER, COLLAPSIBLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:20Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSO),,Wash., DC 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

UU-C-00250B(GSA-FSS) Case, Filing, Transfer, Collapsible

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:20Z
Check the source to verify that this is the current version before use.