INCH-POUND

MIL-C-83503/6C
20 December 1994
SUPERSEDING
MIL-C-83503/6B
1 July 1983

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, FLAT CABLE, NONENVIRONMENTAL DUAL-IN-LINE PLUG FOR TERMINATING ROUND CONDUCTORS ON .050 CENTERS FOR MATING WITH STANDARD DIP SOCKETS, .100 X .300 CONTACT SPACING .100 X .400 CONTACT SPACING AND .100 X .600 CONTACT SPACING

This specification is approved for use by all Departments Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83503.


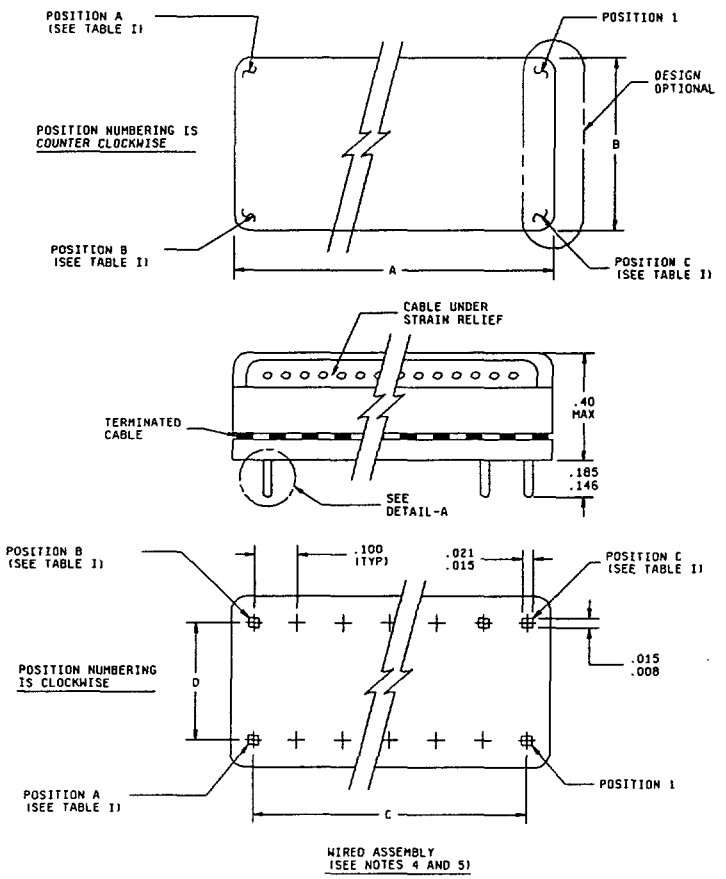


Figure 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

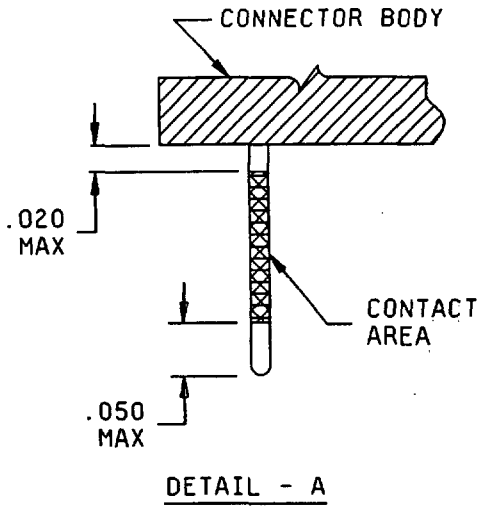

FINISH LOCALIZATION AREA

Inches	mm	Inches	mm
.008	0.20	.700	17.78
.015	0.38	.73	18.5
.020	0.51	.78	19.8
.021	0.53	.800	20.32
.050	1.27	.88	22.4
.100	2.54	.98	24.9
.146	3.71	1.000	25.40
.185	4.70	1.100	27.94
.300	7.62	1.18	30.0
.40	10.2	1.28	32.05
.48	12.2	1.300	33.02
.53	13.5	1.48	37.6
.600	15.24	1.900	48.26
		2.08	52.8

Dash numbers and characteristics

Dash number	Number of connections	Dimensions			
		A (max)	B (max)	C	D
01	14	.78	.48	.600	.300
02	16	.88	.48	.700	.300
03	24	1.28	.73	1.100	.600
04	8	.48	.48	.300	.300
05	18	.98	.48	.800	.300
06	22	1.18	.53	1.000	.400
07	28	1.48	.73	1.300	.600
08	40	2.08	.73	1.900	.600

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.01 inch (0.3 mm) for two place decimals and ±.005 inch (0.13 mm) for three place decimals and 2° on angles.
4. Strain relief shall be provided. Strain relief design is optional (may be either separate of an integral part of cover).
5. Assembled height including installed cable and (when applicable) the strain relief and excluding leads shall be .40 inch (10.2 mm) maximum.
6. Tolerances are non-cumulative.

Figure 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1.

Interface: Round conductor flat cable, .050 centers, to dual-in-line socket .100 X .300 inch, .100 X .400 or .100 X .600 inch.

Temperature range: -55°C to +120°C.

Voltage rating: 300 V rms.

Current rating: 1 ampere.

Materials:

Contacts: Beryllium copper in accordance with QQ-C-530 or QQ-C-533 or phosphor bronze in accordance with QQ-B-750, with gold plating in the contact area.

Accessories: May be made of 301 stainless steel or other material in accordance with MIL-C-83503.

Housing: Glass filled nylon in accordance with MIL-M-20693 or MIL-M-19887: Diallylphthalate, type SDG-F in accordance with MIL-M-14; or glass filled polyester in accordance with MIL-M-24519.

Conductor accommodation: 28 AWG stranded .05 inch spacing between conductor centerlines.

Test wire size: 28 AWG stranded.

Assembly tool: Connector manufacturers commercial tool.

Dielectric withstanding voltage (at sea level): 500 V rms.

(at altitude): 200 V rms.

Contact resistance: 50 milliohms, maximum.

Humidity: Connector shall be mated with the appropriate series 2 (low profile) dip socket in accordance with MIL-S-83734 with long axis of contacts running in a horizontal direction and the cable hanging down vertically.

Polarization: Not required.

Marking:

Contact identification: As a minimum, mark the end contacts in each row with raised numbers or ink stamps on connector cover.

Part or Identifying Number (PIN): M83503/6 - (dash number from figure 1).

Intended use: Connector may be directly soldered to a .093 inch printed wiring board or mated with the appropriate series 2 (low profile) dip socket in accordance with MIL-S-83734. These connectors when mated with MIL-S-83734 dip sockets are not to be used in airborne applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

TABLE I. Pin position.

Pin position	Number of connections							
	8	14	16	18	22	24	28	40
A	4	7	8	9	11	12	14	20
B	5	8	9	10	12	13	15	21
C	8	14	16	18	22	24	28	40

TABLE II. Wire to contact pin.

Wire number	Number of connections							
	8	14	16	18	22	24	28	40
1	8	14	16	18	22	24	28	40
2	1	1	1	1	1	1	1	1
3	7	13	15	17	21	23	27	39
4	2	2	2	2	2	2	2	2
5	6	12	14	16	20	22	26	38
6	3	3	3	3	3	3	3	3
7	5	11	13	15	19	21	25	37
8	4	4	4	4	4	4	4	4
9		10	12	14	18	20	24	36
10		5	5	5	5	5	5	5
11		9	11	13	17	19	23	35
12		6	6	6	6	6	6	6
13		8	10	12	16	18	22	34
14		7	7	7	7	7	7	7
15			9	11	15	17	21	33
16			8	8	8	8	8	8
17				10	14	16	20	32
18				9	9	9	9	9
19					13	15	19	31
20					10	10	10	10
21					12	14	18	30
22					11	11	11	11
23						13	17	29
24						12	12	12
25							16	28
26							13	13
27							15	27
28							14	14
29								26
30								15
31								25
32								16
33								24
34								17
35								23
36								18
37								22
38								19
39								21
40								20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force - 85

Review activities:
Air Force - 17, 99
DLA - ES

Preparing activity:
DLA - ES

Agent:
DLA - ES

(Project 5935-3959)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:20Z
Check the source to verify that this is the current version before use.