INCH-POUND


MIL-G-83528/48
30 June 1989
SUPERSEDING
MIL-G-83528/4A
9 September 1988

MILITARY SPECIFICATION SHEET

Ⓑ GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, CONNECTOR FLANGE MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

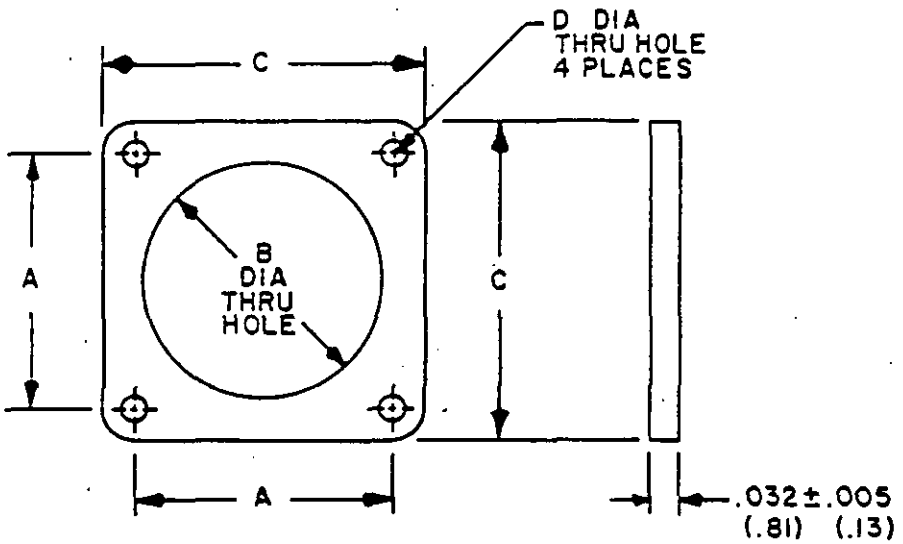

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. EMI/RFI connector gaskets.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

(B) Material: Type A, B, C, D, E, F, G, H, J, K, or L.

(B) Part or Identifying Number (PIN): See table I.

Connector shell size: See tables I and II.

Supersession information: See table III.

(B) TABLE I. Dimensions.

PIN M83528/004X 1/ 2/	Dimension A ±.010	B +.020 -.000	C ±.015	D ±.010	Connector shell size	Cross section cm^2 3/
001	.469 (11.91 mm)	.375 (9.53 mm)	.738 (18.75 mm)	.141 (3.58 mm)	6	.037
002	.594 (15.09 mm)	.630 (16.00 mm)	.840 (21.34 mm)	.135 (3.43 mm)	8	.022
003	"	.568 (14.43 mm)	.812 (20.62 mm)	.125 (3.18 mm)	8	.025
004	"	.500 (12.70 mm)	.875 (22.23 mm)	.156 (3.96 mm)	8	.039
005	.719 (18.26 mm)	.750 (19.05 mm)	.965 (24.51 mm)	.135 (3.43 mm)	9,10	.022
006	"	.680 (17.27 mm)	.937 (23.80 mm)	.125 (3.18 mm)	10	.027
007	"	.625 (15.88 mm)	1.000 (25.40 mm)	.156 (3.96 mm)	10S,SL	.039
008	.812 (20.62 mm)	.875 (22.23 mm)	1.060 (26.92 mm)	.141 (3.58 mm)	11,12	.019
009	.813 (20.65 mm)	.750 (22.10 mm)	1.094 (27.79 mm)	.141 (3.58 mm)	12,12S,SL	.036
010	.906 (23.01 mm)	1.005 (25.53 mm)	1.153 (29.29 mm)	.135 (3.43 mm)	13,14	.015
011	"	.938 (23.83 mm)	1.125 (28.58 mm)	.125 (3.18 mm)	14	.019
012	"	.875 (22.23 mm)	1.188 (30.18 mm)	.156 (3.96 mm)	14, 14S	.032
013	.969 (24.61 mm)	1.135 (28.83 mm)	1.258 (31.95 mm)	.156 (3.96 mm)	15,16	.013
014	"	1.063 (27.00 mm)	1.250 (31.75 mm)	.125 (3.96 mm)	16	.019
015	"	1.000 (25.40 mm)	1.281 (32.54 mm)	.156 (3.96 mm)	16,16S	.029
016	1.062 (26.97 mm)	1.260 (32.00 mm)	1.351 (34.32 mm)	.156 (3.96 mm)	17,18	.010
017	"	1.189 (30.20 mm)	1.343 (34.11 mm)	.125 (3.18 mm)	18	.016
018	"	1.135 28.83 mm)	1.375 (34.93 mm)	.156 (3.96 mm)	18,18S	.025
019	1.156 (29.36 mm)	1.375 (34.93 mm)	1.500 (38.10 mm)	.141 (3.58 mm)	19,20	.013
020	"	1.312 (33.32 mm)	1.467 (37.26 mm)	.125 (3.18 mm)	20	.016
021	"	1.250 (31.75 mm)	1.500 (38.10 mm)	.172 (4.37 mm)	20	.026
022	1.250 (31.75 mm)	1.500 (38.10 mm)	1.625 (41.28 mm)	.141 (3.58 mm)	21,22	.013
023	"	1.437 (36.50 mm)	1.562 (39.67 mm)	.125 (3.18 mm)	22	.013
024	"	1.375 (34.93 mm)	1.625 (41.28 mm)	.172 (4.37 mm)	22	.026
025	1.375 (34.93 mm)	1.625 (41.28 mm)	1.750 (44.45 mm)	.172 (4.37 mm)	23,24	.013
026	"	1.563 (39.70 mm)	1.703 (43.26 mm)	.152 (3.86 mm)	24	.015
027	"	1.500 (38.10 mm)	1.750 (44.45 mm)	.203 (5.16 mm)	24	.026
028	1.500 (38.10 mm)	1.750 (44.45 mm)	1.875 (47.63 mm)	.172 (4.37 mm)	25	.013
029	1.562 (39.67 mm)	1.750 (44.45 mm)	2.000 (50.80 mm)	.203 (5.16 mm)	28	.026
030	1.750 (44.45 mm)	2.000 (50.80 mm)	2.250 (57.15 mm)	.219 (5.56 mm)	32	.026
031	1.938 (49.23 mm)	2.250 (57.15 mm)	2.500 (63.50 mm)	.219 (5.56 mm)	36	.026
032	2.188 (55.58 mm)	2.500 (63.50 mm)	2.750 (69.85 mm)	.219 (5.56 mm)	40	.026
033	2.375 (60.33 mm)	2.781 (70.63 mm)	3.000 (76.20 mm)	.219 (5.56 mm)	44	.023
034	2.625 (66.68 mm)	3.031 (76.99 mm)	3.250 (82.55 mm)	.219 (5.56 mm)	48	.023

(B) 1/ "X" in the PIN shall be replaced by the applicable material type.
(B) 2/ Complete PIN will include an additional letter to indicate material type. Example: M83528/004A001.
(B) 3/ For calculation of volume resistivity (see 4.6.11 of MIL-G-83528). For reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

TABLE II. Connector shell size.

(B)

PIN M83528 /004X	MIL-C-38999 Series I	MIL-C-38999 Series II	MIL-C-38999 Series IV	MIL-C-81511	MS90484	MIL-C-5015	MIL-C-83723	NAS 1599	MIL-C-26482
001							6	6	6
002		8							
003				8	8				
004						8	8	8	8
005	9	10							
006				10	10				
007						10	10	10	10
008	11	12	11						
009						12	12	12	12
010	13	14	13						
011				14	14				
012						14	14	14	14
013	15	16	15						
014				16	16				
015						16	16	16	16
016	17	18	17						
017				18	18				
018						18	18	18	18
019	19	20	19						
020				20	20				
021						20	20	20	20
022	21	22	21						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

TABLE II. Connector shell size - Continued.

PIN M83528 /004X	MIL-C-38999 Series I	MIL-C-38999 Series II	MIL-C-38999 Series IV	MIL-C-81511	MS90484	MIL-C-5015	MIL-C-83723	NAS 1599	MIL-C-26482
023				22	22				
024						22	22	22	22
025	23	24	23						
026				24	24				
027						24	24	24	24
028	25		25						
029							28	28	28
030							32	32	32
031							36	36	36
032							40	40	40
033							44	44	44
034							48	48	48

TABLE III. Supersession information.

PIN 1/ M83528/004X	Superseded DESC drawing PIN 85099X 1/	PIN 1/ M83528/004X	Superseded DESC drawing PIN 85099X 1/
001	001	018	018
002	002	019	019
003	003	020	020
004	004	021	021
005	005	022	022
006	006	023	023
007	007	024	024
008	008	025	025
009	009	026	026
010	010	027	027
011	011	028	028
012	012	029	029
013	013	030	030
014	014	031	031
015	015	032	032
016	016	033	033
017	017	034	034

1/ "X" in the PIN indicates the applicable material type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 19, 20, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0260-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.